



Electric deck oven for pizza

2 decks composition

iDeck consists of one or two baking chambers and an optional proofer or stand. The oven's baking surface is made of refractory material, providing the perfect heat distribution over the whole surface. This oven is particularly suitable for direct or indirect pizza baking. Temperature management is electronic, power control of ceiling and floor is independent. The oven door is hinged at the bottom, with a tempered glass window to check the product during baking. The stand consists of a painted metal structure, while the proofer is a stainless steel cabinet equipped with a heating thermostat. The proofer can reach the maximum temperature of 65°C (149°F), whereas the maximum temperature of the baking chamber is 450°C (842°F).



FUNCTIONING

- Heating by armoured heating elements
- Electronic power management with independent adjustment of ceiling and floor (DualPower Technology™)
- Maximum temperature reached 450°C
- Continuous temperature monitoring with thermocouples

CONSTRUCTION

- Front structure made in folded stainless steel
- Oven panels made pre-painted metal sheets
- Door in stainless steel with shutter with hinge at bottom with balancing spring
- Door handle in stainless steel
- Tempered crystal glass
- Control panel on the right front side
- Baking surface in refractory brick
- Upper and lateral structure in aluminized sheet
- Thermal insulation in mineral wool

BAKING ELEMENT INTERNAL DIMENSIONS

Internal height	140 mm
Internal depth	660 mm
Internal width	614 mm
Baking surface	0,4 m ²



Optional: Stainless steel cabinet Proofer on wheels


STANDARD EQUIPMENT

- Illumination by halogen lamp
- Independent maximum temperature safety device (only electronic version)

ACCESSORIES


- Proofer on wheels height 700, 1000 mm
- Stand height 600, 900 mm
- 4 wheels kit
- Additional trayholder slides
- Stacking kit
- Hood

TOP VIEW

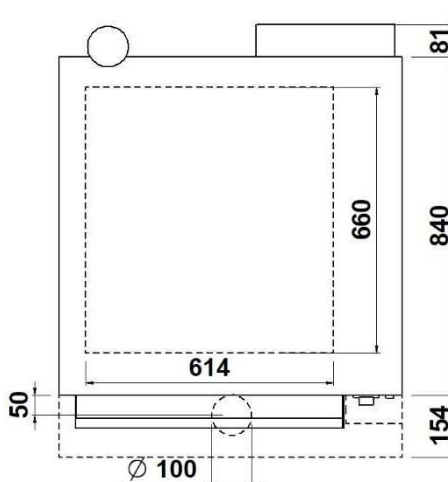

iD-M 60.60

(assembled with stand height 950mm)

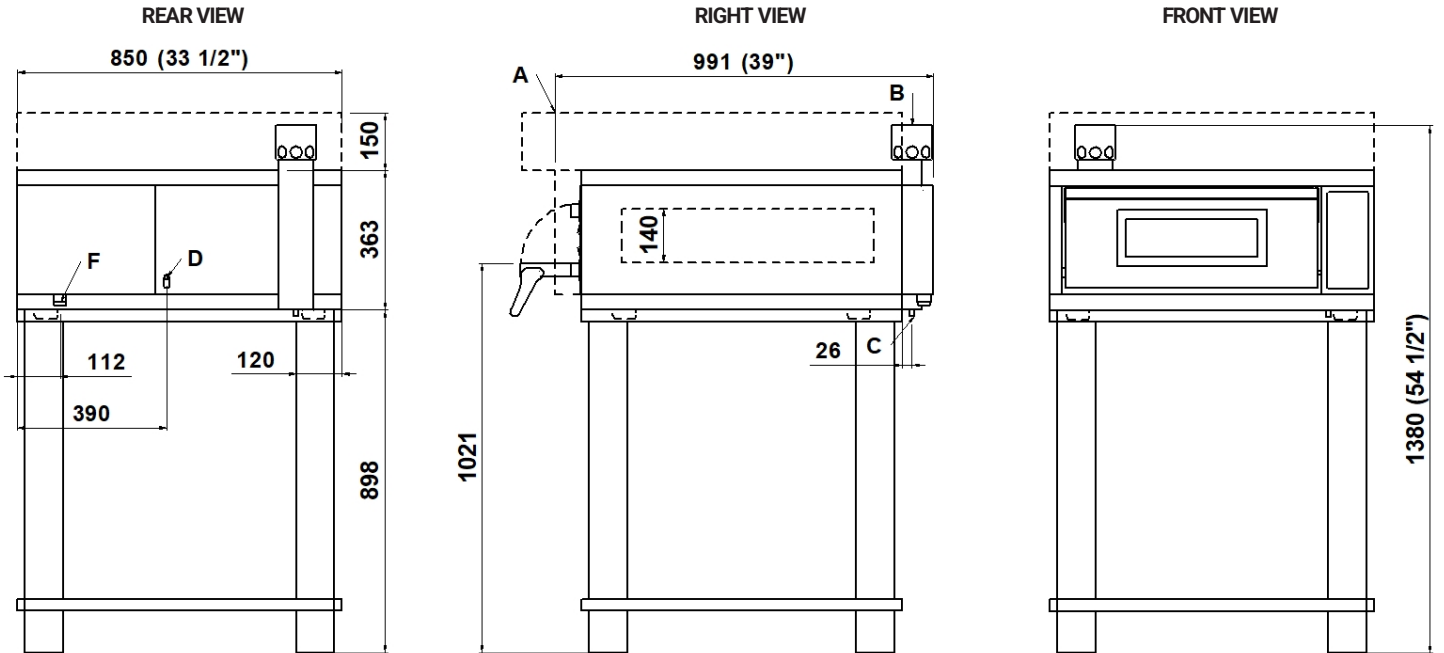

NOTE: The dimensions indicated in the views are in millimeters.

A Ø100 hood steam collector	B Ø INT. 102 steam exhaust	C Ø12 condensate exhaust	D M6 equipotential screw
F fairleads			

EXTERNAL DIMENSIONS

External height	481 mm
External depth	991 mm
External width	850 mm
Weight	80 kg

SHIPPING INFORMATION

Packed oven sizes:	
Height	560 mm
Depth	1060 mm
Width	920 mm
Weight	(80+13)kg

FEEDING AND POWER

Feeding AC V230 1ph	
Frequency 50/60Hz	
Max power	4,2 kW
*Average power cons	2,1 kWh

TOTAL BAKING CAPACITY

Tray (600x400)mm	1
Pizza diameter 300mm	4
Pizza diameter 450mm	1


Connecting cable recommended (not included)
 Nema 6-30P 3 X AWG 10(V230 1ph)

Prover power supply (optional)
 A.C. V230 1N 50/60 Hz
 Max power 1kW
 *Average power cons 0,5 kWh
 Connecting cable recommended (not included)
 Nema 15-20P 3 X AWG 10(V230 1)

* This value is subject to variation according to the way in which the equipment is used
 NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice

iD-D 60.60

(assembled with stand height 900mm)

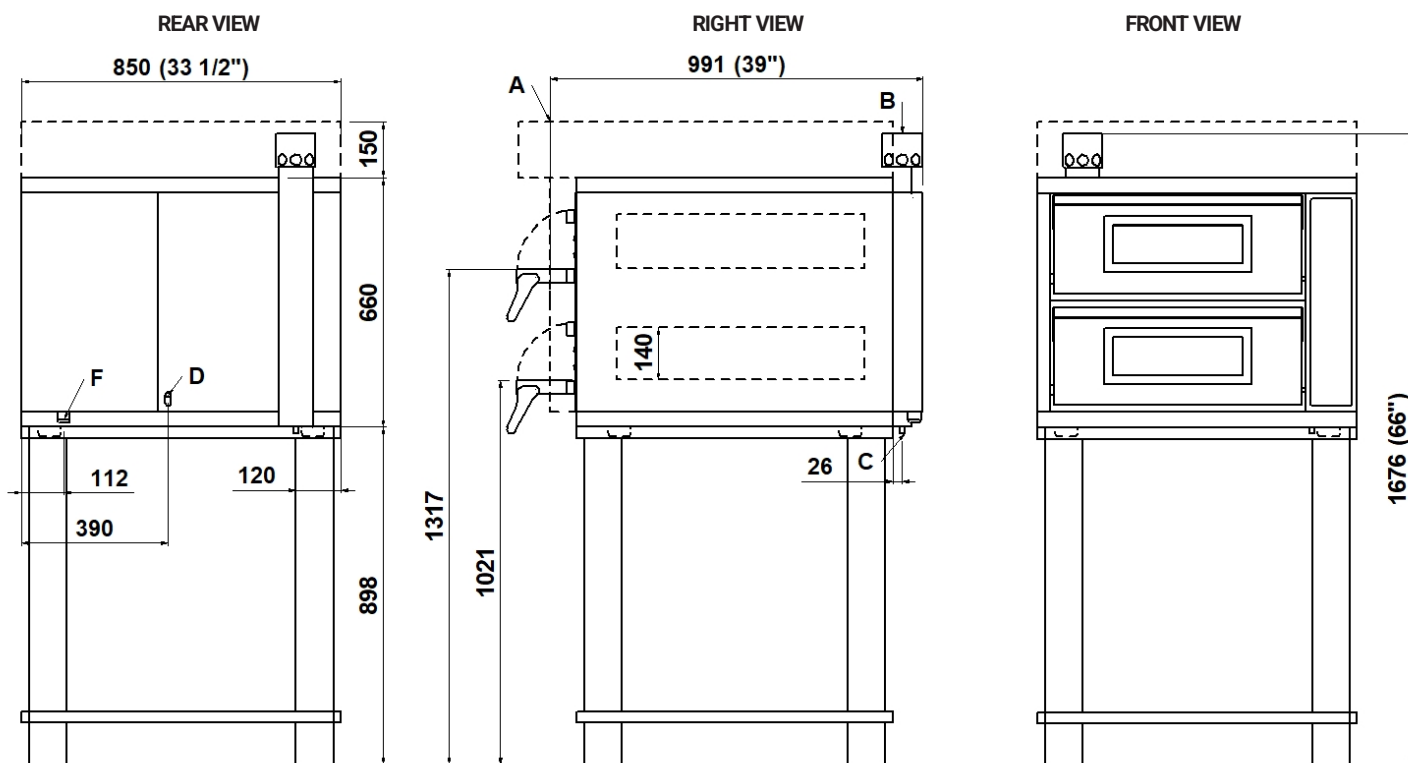

NOTE: The dimensions indicated in the views are in millimeters.

A Ø100 hood steam collector	B Ø INT. 102 steam exhaust	C Ø12 condensate exhaust	D M6 equipotential screw
F fairleads			

EXTERNAL DIMENSIONS

External height	778 mm
External depth	991 mm
External width	850 mm
Weight	133 kg

SHIPPING INFORMATION

Packed oven sizes:	
Max height	840 mm
Max depth	1060 mm
Max width	920 mm
Weight	(133+14) kg

FEEDING AND POWER

Feeding	
A.C. V230 3ph or 1ph	
To be changed on site	
Frequency	50/60 Hz
Max power	8,4 kW
*Average power cons	4,2 kWh
Connecting cable recommended (not included)	
Nema 6-50P 3 X AWG 6(V230 1ph)	
Nema 15-30P 4 X AWG10 (V230 3ph)	
Prover power supply (optional)	
A.C. V230 1N 50/60 Hz	
Max Power 1 kW	
Average power cons. 0.5 kWa	
Connecting cable recommended (not included)	
Nema 15-20P 3 X AWG 10(V230 1)	

TOTAL BAKING CAPACITY

Tray (600x400)mm	2
Pizza diameter 300mm	8
Pizza diameter 450mm	2

* This value is subject to variation according to the way in which the equipment is used
NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice