



ELITE SERIES REFRIGERATION

SERVING THE FOOD INDUSTRY SINCE 1951

41 CU. FT. TWO-SWING DOOR REFRIGERATION

Model: VRD43 Item 41218

With a large capacity, this is an ideal cooler to display products in a large space



KEY FEATURES

- **BMAD refrigeration system,** allow to cool down the interior and maintain the temperature range with a minimum energy consumption.
- **30 gauge exterior pre-painted steel,** brings years of duration.
- **Electronic temperature controller,** assures an optimal performance of the cooler, making the product temperature ideal for its consumption.
- **High efficiency glass door,** with a double panel and a low-e film reduces the condensation. Self closing system allow the door to get back to its original position, taking care not to damage it.
- **LED lighting system,** uses a portion of the energy of regular fluorescent lights, and need no replacement for seven years.
- **CFC and HFC free Cyclopentane foam,** is eco-friendly and a high efficiency insulator.
- **Electronic fan motors,** allow a better performance, using only a portion of the energy required by a shaded pole motor.
- **Low maintenance condenser,** prevents dust from blocking air flow and thus saving energy and increasing compressor's life.



Establishing a **NEW STANDARD** in the commercial refrigeration industry.



COMMERCIAL REFRIGERATOR
AND/OR FREEZER
9242



NSF/ANSI 7 COMMERCIAL REFRIGERATOR
AND/OR FREEZER
20YY




Authorized Dealer

ELITE SERIES REFRIGERATION


41 CU. FT. TWO-SWING DOOR REFRIGERATION



PRODUCT DIMENSION



TOP VIEW

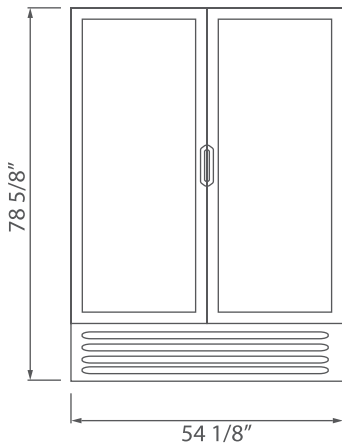

FRONT VIEW




SIDE VIEW

TECHNICAL SPECIFICATIONS

ITEM NUMBER	41218
MODEL	VRD43
DESCRIPTION	41 cu.ft. Two-Swing Door Refrigeration
VOLUME	41 .6ft ³ / 1179.7 liters
DOORS	2
SHELVES	10
SHELF SIZE	24 1/4" x 19 3/4" / 615mm x 501mm
CAPACITY	20 oz. - Total: 560
	Front: 8
	Gravity feed: 560
CAPACITY	12 oz. - Total: 1134
	Gravity feed: 560
TEMPERATURE RANGE	0°C - 7°C / 32°F - 44.6°F
ENERGY CONSUMPTION	5.550 kWh/day*
ELECTRICAL	115 V / 60 Hz / 1 Ph
CORD LENGTH	118" / 3000 mm
HORSEPOWER	1/2
AMPS	10
WEIGHT	Gross: 466.3 lbs. / 211.5 kg. Crated: 472.9 lbs. / 214.5 kg.
INTERNAL DIMENSIONS (WDH)	50" x 24 7/8" x 59 5/8" / 1270 x 633 x 1515mm
DIMENSIONS (WDH)	54 1/8" x 29 3/4" x 78 5/8" / 1375 x 756 x 1997 mm

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

OPTIONS





Gravity Kit



Casters

5'9" / 1790mm

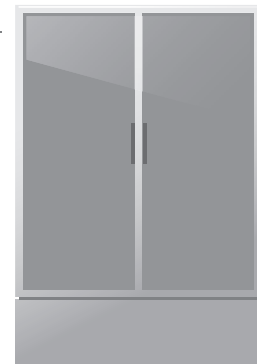

VRD 43



COMMERCIAL REFRIGERATOR
AND/OR FREEZER
9242



NSF/ANSI 7 COMMERCIAL REFRIGERATOR
AND/OR FREEZER
20YY



LIMITED WARRANTY

3 YEAR PARTS AND LABOR
5 YEARS PARTS ONLY ON COMPRESSOR

NEMA
5-15
125 VAC / 15 AMP



BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.

OMCAN INC.

Telephone: 1-800-465-0234

Fax: (905) 607-0234

Email: sales@omcan.com

Website: www.omcan.com



Follow us to keep up to date with the latest news and offers



2015.E.O.E