SANDWICH UNIT REFRIGERATOR

Model: SW60N12C-FB-D

Natural Refrigerant R-290 Model

60" Cutting Top Sandwich Unit Refrigerator with Drawers - 12 Pans Front Breathing

Stainless steel front, top and end panels, aluminum back and interior.



Options and Accessories

(upcharge and lead times may apply)	
Stainless steel interior	Drawer locks
Stainless steel back	Rear mounted cutting board
Overshelves (single or double)	Composite cutting board
Flat lid	Modified pan opening
Vision panel lid	

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Location:	
	a
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance rated refrigeration system	
Natural, environmentally safe, high efficiency R-290 refrigerant ¹	
Unique air flow distribution allows pan product to maintain 33° - 41°F	
Automatic, hot gas condensate evaporator	
Non-corrosive, plasticized fin evaporator coil	
Easily serviceable, back mounted compressor	
Expansion valve system	

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
Smooth, polished chrome drawer handles
Stainless steel roll out drawers
Magnetic snap in Santoprene™ drawer gaskets
19" deep, full length nylon cutting board
Insulated lid
Completely enclosed, vented and removable case back
3 3/4" casters

MODEL FEATURES

(12) $1/6$ size recessed pans, 4" deep	
Electronic control, off-cycle defrost	
Removable interior tub below pans	

¹ R-290 refrigerant meets all federal and state regulatory requirements.

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space. For proper operation, the area under and in front of the cabinet <u>must</u> not be obstructed in any way.





APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	17.0 (481 cu l)
1/6 Size Pans (4" deep)	12
Width, Overall (inches)	60 (1524 mm)
Depth, Overall (inches) (including cutting board & bumpers)	38 1/4 (972 mm)
Depth, Cutting Board (inches)	19 (483 mm)
Height, Overall (inches) (including 3 $3/4$ " casters)	41 (1041 mm)
Number of Drawers	4

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3+
Capacity (BTU per hour)*	2560

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Total Amps (International)	5.7 (3.6)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Weight (pounds)	465 (211 kg)
Height - Crated (inches)	43 1/4 (1099 mm)
Width - Crated (inches)	68 (1727 mm)
Depth - Crated (inches)	37 1/4 (946 mm)

DRAWER PAN CONFIGURATIONS


Two Tier: (1) 12 x 20 x 6 pan per drawer


* Rating @ +25°F evaporator, 90°F ambient


Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Model Plan Views

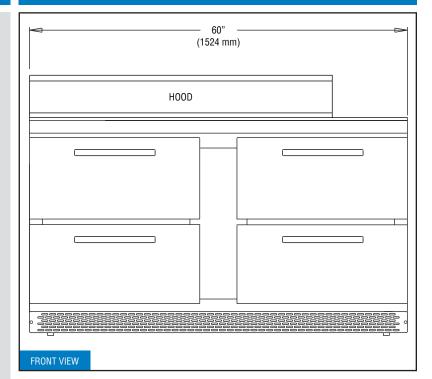

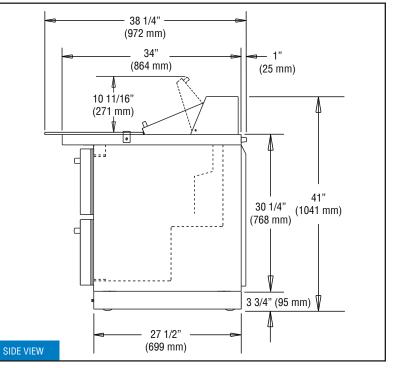

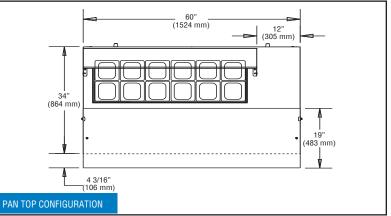

REVISED: 3/13/24