

## Refrigeration Equipment 3-Glass Door Back Bar Refrigerator Black 73" Long


ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

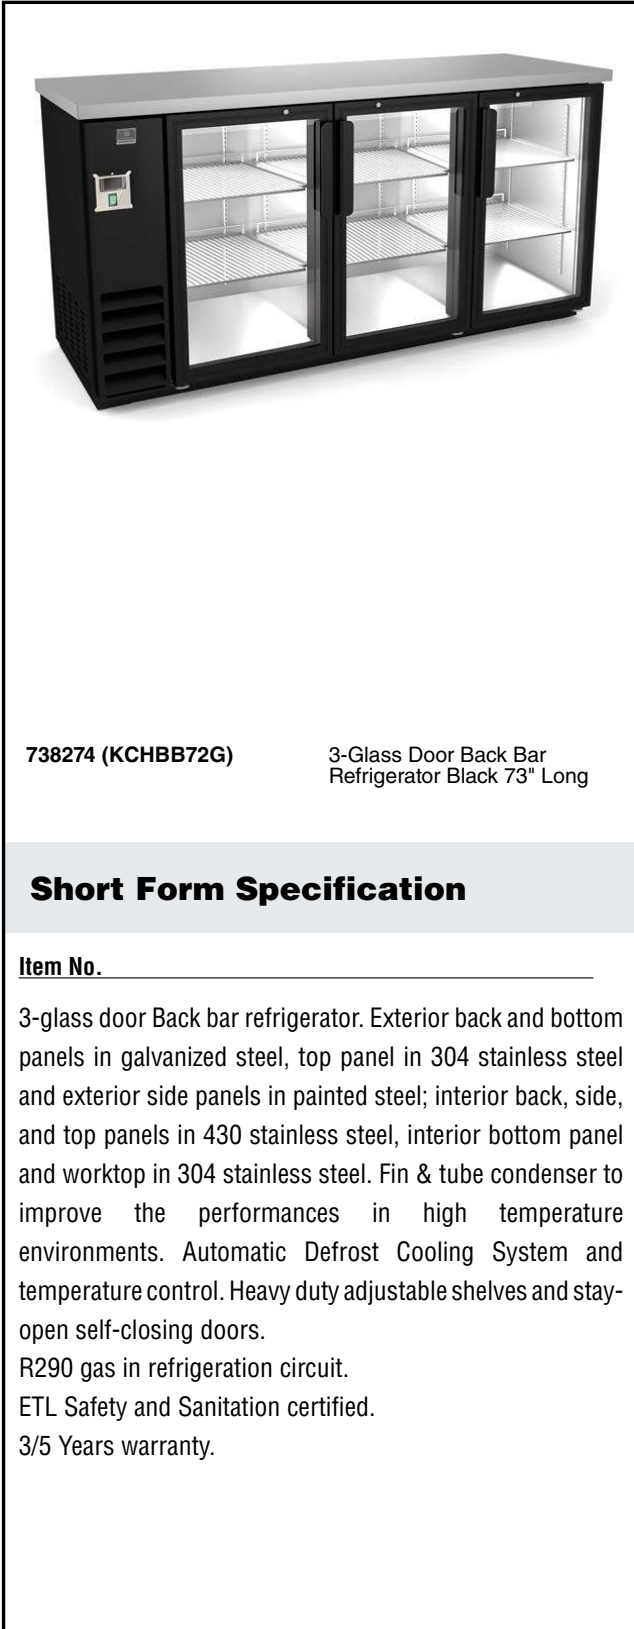

738274 (KCHBB72G)

3-Glass Door Back Bar  
Refrigerator Black 73" Long

### Short Form Specification

Item No. \_\_\_\_\_

3-glass door Back bar refrigerator. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in painted steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in refrigeration circuit.  
ETL Safety and Sanitation certified.  
3/5 Years warranty.

### Main Features

- External digital temperature display.
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.


### Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

APPROVAL: \_\_\_\_\_

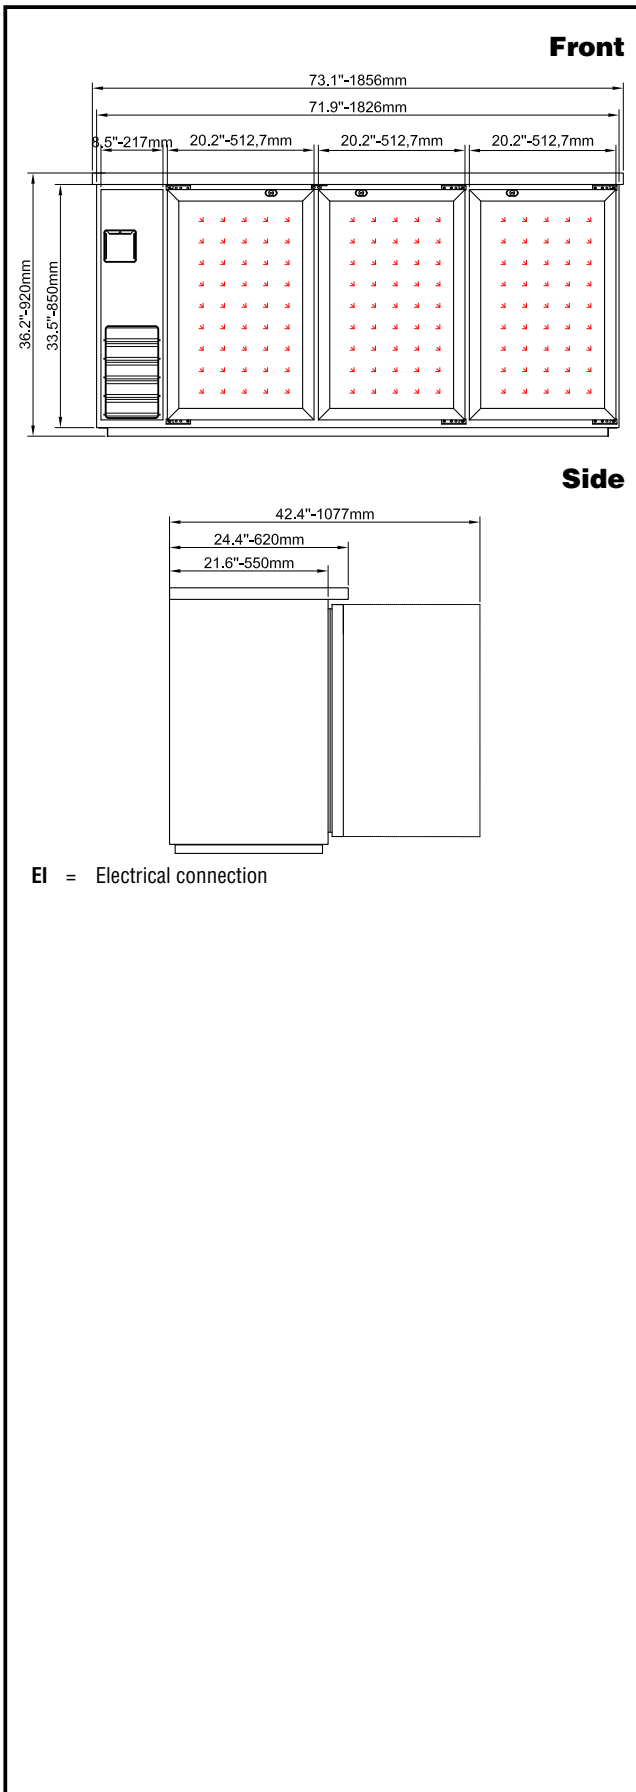

## Electric

|                               |                  |
|-------------------------------|------------------|
| <b>Supply voltage:</b>        | 115 V/1 ph/60 Hz |
| <b>738274 (KCHBB72G)</b>      |                  |
| <b>Electrical power, max:</b> | 0.31 kW          |
| <b>Plug type:</b>             | USA NEMA 5-15P   |

## Capacity:

|                        |              |
|------------------------|--------------|
| <b>Gross capacity:</b> | 20.8 cu.feet |
|------------------------|--------------|

## Key Information:

|                                             |                                             |
|---------------------------------------------|---------------------------------------------|
| <b>Door hinges:</b>                         | 1 Left+2 Right                              |
| <b>External dimensions, Width:</b>          | 73 1/16" (1856 mm)                          |
| <b>External dimensions, Depth:</b>          | 24 7/16" (620 mm)                           |
| <b>External dimensions, Height:</b>         | 36 1/4" (920 mm)                            |
| <b>Number and type of doors:</b>            | 3 Glass                                     |
| <b>Internal Dimensions (depth):</b>         | 20 " / (508 mm)                             |
| <b>Internal Dimensions (height):</b>        | 28 " / (711.2 mm)                           |
| <b>Internal Dimensions (width):</b>         | 60 " / (1524 mm)                            |
| <b>Shipping height:</b>                     | 41 5/16" (1050 mm)                          |
| <b>Shipping weight:</b>                     | 397 lbs (180 kg)                            |
| <b>Shipping volume:</b>                     | 47.8 ft <sup>3</sup> (1.35 m <sup>3</sup> ) |
| <b>Number and type of grids (included):</b> | 6 - Vinyl-Coated Steel                      |
| <b>Type of external material:</b>           | Black Prepainted Steel                      |
| <b>Type of internal material:</b>           | Stainless Steel                             |
| <b>Warranty:</b>                            | 3 / 5 years                                 |
| <b>Approvals</b>                            | ETL C&US;ETL SANITATION                     |

## Refrigeration Data

|                                    |              |
|------------------------------------|--------------|
| <b>Compressor power:</b>           | 1/5 hp       |
| <b>Operating temperature min.:</b> | 32 °F        |
| <b>Operating temperature max.:</b> | 41 °F        |
| <b>Condenser type:</b>             | Fin & tube   |
| <b>Defrost type:</b>               | Auto Defrost |

## Sustainability

|                             |        |
|-----------------------------|--------|
| <b>Current consumption:</b> | 3 Amps |
| <b>Refrigerant type:</b>    | R290   |
| <b>GWP Index:</b>           | 3      |
| <b>Refrigerant weight:</b>  | 130 g  |

