

**MODEL: IUC-MSG110**
**CHEF BASES:  
Drawered Refrigerator**

### General Strengths

- ✓ **Worktop.** Cabinet top is one piece, heavy duty reinforced stainless steel. Drip resistant "V" edge protect against spills.
- ✓ **Drawers.** All drawers include triple chamber door gaskets, easy to remove and snap in. Heavy-duty stainless-steel slides hold up to 440 lbs. Integrated handle and self-closing system.
- ✓ **Control systems.** Higher precision in managing temperature settings. The ability to adjust temperature ranges to meet end user's requirements.
- ✓ **100% Tested.** All condensing units are 100% tested in helium chambers for refrigeration leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)

**HOLD UP TO 1000 LBS  
(454 KG)**



AISI 304 Stainless Steel worktop with drip guard marine edge, standard.



Heavy-duty stainless-steel drawer slides designed to hold up to 440 Lbs.  
(Pans Not Included)

MODEL	Dimensions (inches) (mm)			Nº Drawers	Nº Pans	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IUC-MSG110	110-5/8	32-1/2	26-1/4	6	12 (12x20")	R134a	0.79	33°F/38°F	22	1/3	6.9	810
	2810	825	666									

FTL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Model #: \_\_\_\_\_

**MODEL: IUC-MSG110** **CHEF BASES: Drawered Refrigerator**

**STANDARD FEATURES**

➤ **Exterior**

- AISI 304 Stainless Steel Top. Drip guard marine edge protects against spills,
- Front and sides in AISI 430 Stainless Steel.

➤ **Interior**

- AISI 430 Stainless Steel,
- Sealed interior floors.

➤ **Casters**

- 4" diameter casters,
- Locks provided on front set.

➤ **Drawers**

- Each drawer accommodates two full 12"x20" pans (pans not included).
- Drawers with full-extension sliding rails for complete opening,
- Drawers with integrated handle,
- **Heavy-duty stainless-steel drawer slides designed to hold up to 440 Lbs (200 Kg.)**

➤ **Insulation**

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation,
- Low GWP & Zero ODP Effect.

➤ **Refrigeration**

- Digital temperature controller with automatic defrost system,
- Stainless steel evaporative pan,
- **Extractable condensing unit for easy service,**
- Evaporator coil coated with anti-corrosion material 100% Polyester,
- Forced air refrigeration system,
- Refrigeration capacity: 2540 Btu/h (14°F) / 744 W (-10°C).

➤ **Electrical**

- Cord and NEMA 5-15P plug,
- Electrical connection is 115V / 1ph / 60 Hz.
- 15 AMP breakers required,





➤ **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

**OPTIONAL FEATURES**

- ✓ Set of 6" legs, height adjustable from 5" to 8",
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

**PLAN VIEW**

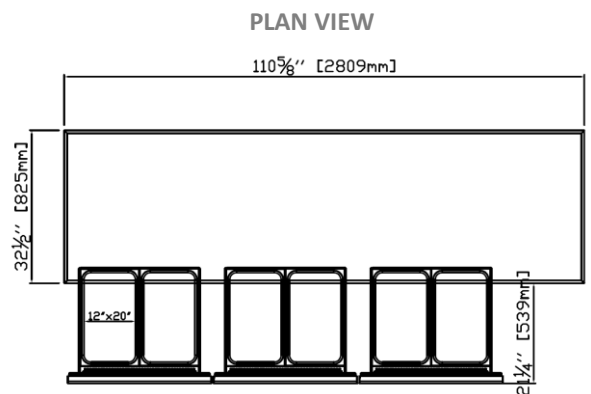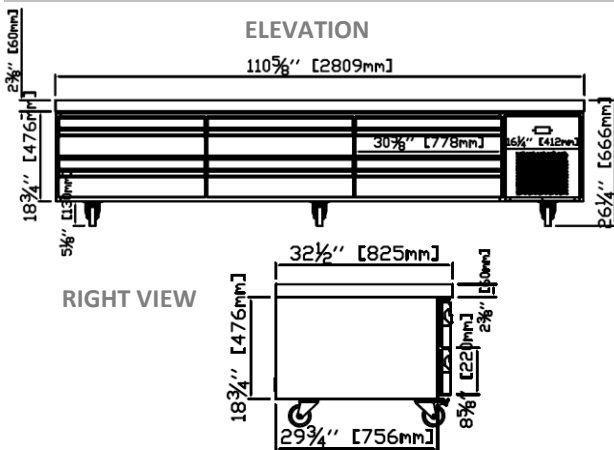

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**Infrico USA Corp.**  
 1409 N.W. 84th Avenue  
 Doral, FL 33126  
 1.305.777.9599 Office  
 1.305.777.9598 Fax

[www.infrico.us](http://www.infrico.us)  
[sales@infrico.com](mailto:sales@infrico.com)

**APPROVALS:** \_\_\_\_\_  
**AVAILABLE AT:** \_\_\_\_\_