







SW36

Pot & Pan Washer

-  12 racks per hour | 36 pans per rack
-  Fully automatic operation with power on/off button
-  Hold down rack system for secure washing
-  Timed wash and rinse cycles

STANDARD FEATURES

- Tank heat: electric immersion heater, steam injector or steam coil
- Easily removable double filtration system
- Four rotating wash arms with high velocity spray nozzles
- Capillary thermometer for wash and final rinse
- Manifold clean-out brush
- Inspection door
- Vent opening with adjustable damper
- Automatic fill and drain
- Single point electrical connection
- Stainless steel frame, legs and feet
- Stainless steel front panel
- Low water protection
- Detergent connection provision
- Fully automatic operation
- Standard frame drip proof motors
- Simple scrap screen

- Waterproof LED digital gauges
- Maintenance free hub system
- External wash-down hose
- Pressure regulator to maintain 20 psi rinse flow
- SureFire® Start-Up and Check-Out Service

OPTIONS

- Stainless steel steam coil tank heat
- Rack assortment: general utility, bake sheet, utensil basket
- Steam booster
- Electric booster
- Security package
- Totally enclosed motor
- Recommended option: power vent fan



SPECIFICATIONS

Capacity	Racks Per Hour	12
	Sheet Pans Per Hour	432
Heating & Venting	Wash Tank Heat	9 kW
	Rinse Booster Heat	9 kW
	Exhaust Hood Requirement	8" Steam Exhaust Vent
	Water Inlet Temperature	110°F
Water	Water Consumption (20 PSI)	162 gal/hr
	Wash Tank Capacity	40 gal
	Peak Drain Flow	12 gal/min
Steam	Steam Tank Consumption (Injected, 10-15 PSI)	41 lbs/hr
	Steam Tank Consumption (Coil, 10-15 PSI)	72 lbs/hr
Gas	BTUH Capacity	90,000
	Natural Gas Consumption (7" W.C. Minute)	88 CFH
	Propane Consumption (11" W.C. Minute)	36 CFH
Other	Wash Motor HP	15
	Shipping Weight	1850 lbs

ELECTRICAL


		Electric	Steam	Gas
Electrical Options	208/60/3	142 amps	42.0 amps	92.0 amps
	230/60/3	128 amps	38.0 amps	83.2 amps
	460/60/3	65.2 amps	20.0 amps	42.6 amps

PROJECT BUILD FORM

Project Name			
Project Manager			
Configuration	Electric		<input type="checkbox"/>
	Steam		<input type="checkbox"/>
	Gas		<input type="checkbox"/>
Electrical	208/60/3		<input type="checkbox"/>
	230/60/3		<input type="checkbox"/>
	460/60/3		<input type="checkbox"/>
Approval (Please Check One)	Approved		<input type="checkbox"/>
	Approved as Noted		<input type="checkbox"/>
	Rejected		<input type="checkbox"/>
Signature	Date		

Internal Info	Serial Number
	Configuration Code

TECHNICAL DRAWING

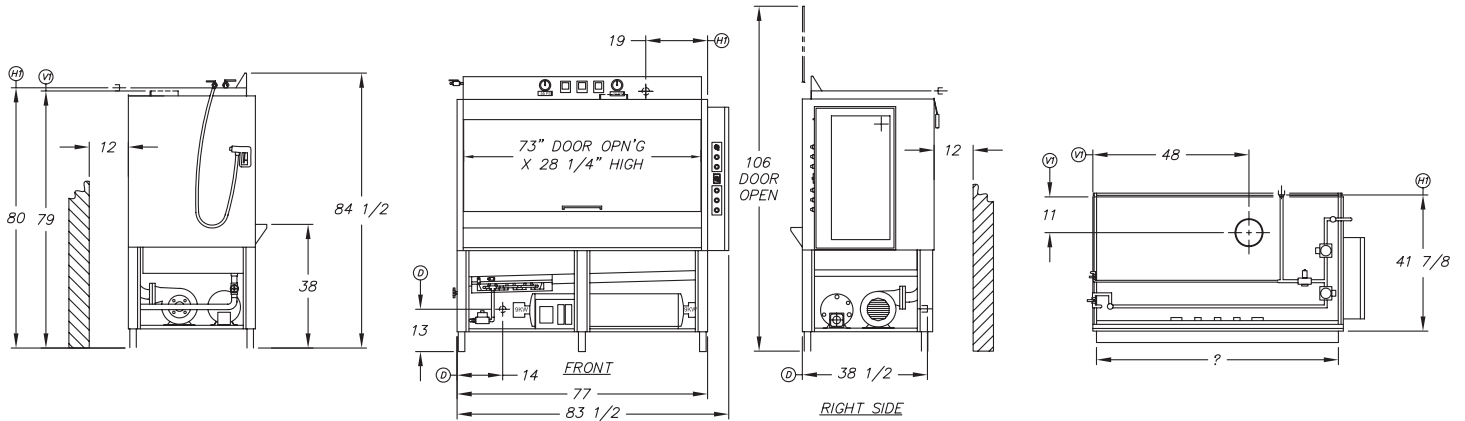

Contact Insinger Sales at 800-344-4802 for an installation drawing specific to your application.

Note: Due to product improvement we reserve the right to change information and specifications without notice.