

# 20-20MW, 20-20W

## Companion Holding Cabinet

ALTO-SHAAM

Keeping food that has been cooked to perfection hot and fresh until the moment it is served demands the gentle precision of Alto-Shaam's exclusive Halo Heat® technology. With controlled temperatures and a closed environment free from forced air, harsh heating elements and added humidity, food is kept warm and flavorful, just as intended.



20-20MW

### Standard features

- Simple and intuitive pushbutton control that commands all appliance functions with easily identifiable icons
- Halo Heat—a controlled, uniform heat source that gently surrounds food for better appearance, taste, and longer holding life
- Stainless steel interior resists corrosion
- Digital control senses temperature drops faster, providing quick heat recovery time
- Close temperature tolerance and even heat application maintain ideal serving temperature throughout the cabinet
- Door venting holds crispy food better

### 20-20W Model

- Stationary holding cabinet supported by four (4) heavy equipment adjustable legs.



TEMPERATURE

Temperature range: 60°F to 200°F [16°C to 93°C]



CAPACITY

**40** Forty full-size or GN 1/1 pans  
**20** Twenty GN 2/1 pans  
**10** Ten full-size sheet pans; twenty full-size sheet pans with additional shelves  
 480 lb [218 kg] product maximum  
 300 qt [284 L] volume maximum

### Configurations (select one)

#### Door swing

- Left-hinged, standard
- Right-hinged, optional

#### Electrical

- 208–240V, 1 ph
- 230V, 1 ph

#### Trolley to be used

- fits 20-20 cart
- fits 20-10 cart

#### Accessories (select all that apply)

- Preheat sealing strip [5016989]
- Shelf, stainless steel 25-1/8" x 20-7/8" [638mm x 529mm] [SH-22473]

#### Roll-in pan carts (H x W x D)

- 20 shelf pan trolley - fits 20-20E, 20-20G, 20-20MW, and QC3-100—69-1/2" x 26-1/8" x 34-3/8" [1766mm x 661mm x 873mm] 2-9/16" [65mm] vertical spacing between shelves [5026385] or [5026431—for correctional institutions]
- 20 shelf pan trolley - fits 20-20E, 20-20G, 20-20MW, and QC3-100/NT—69-1/2" x 18-1/4" x 29-11/16" [1766mm x 475mm x 753mm] 2-9/16" [65mm] vertical spacing between shelves [5026388] or [5026282—for correctional institutions]

#### Roll-in plate carts (H x W x D)

- 102 plate trolley - fits 20-20E, 20-20G, 20-20MW, and QC3-100—69-5/8" x 26-7/8" x 42-1/2" [1769mm x 683mm x 1080mm] 3" [77mm] vertical spacing between shelves [5016478] or [5017150—for correctional institutions]
- 84 plate trolley - fits 20-20E, 20-20G, 20-20MW, and QC3-100—69-5/8" x 26-7/8" x 42-1/2" [1769mm x 683mm x 1080mm] 3-11/16" [93mm] vertical spacing between shelves [5026386] or [5046432—for correctional institutions]
- 60 plate trolley - fits 20-20E, 20-20G, 20-20MW, and QC3-100—69-5/8" x 26-7/8" x 37-1/8" [1769mm x 683mm x 943mm] 2-9/16" [66mm] vertical spacing between shelves [5016489] or [5017153—for correctional institutions]
- 51 plate trolley - fits 20-20E, 20-20G, 20-20MW, and QC3-100—70" x 18-3/4" x 37-1/8" [1778mm x 475mm x 943mm] 3-1/16" [77mm] vertical spacing between shelves [5016490] or [5017154—for correctional institutions]




IP X4



# 20-20MW, 20-20W



## Specification

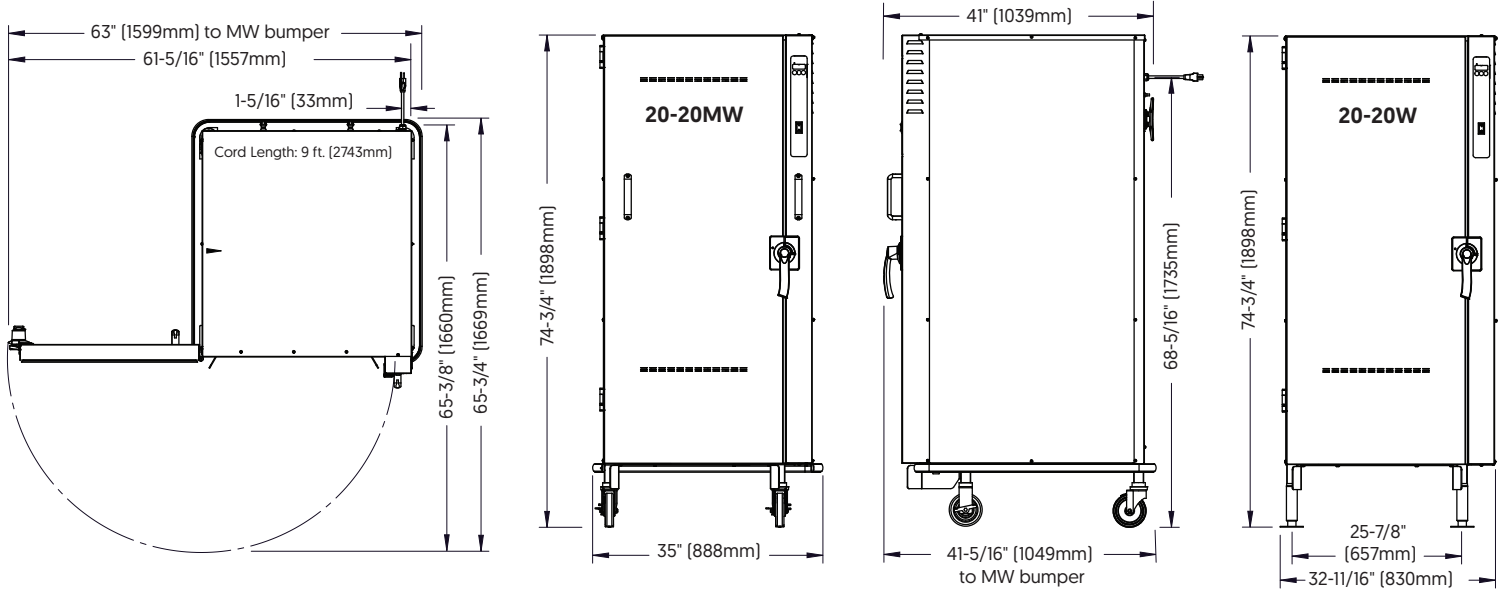

### DIMENSIONS

#### Model

20-20MW  
20-20W

#### Exterior (H x W x D)

74-3/4" x 35" x 41-5/16" [1898mm x 888mm x 1049mm]  
74-3/4" x 32-11/16" x 41" [1898mm x 830mm x 1039mm]

#### Ship Dimensions (L x W x H)\*

56" x 46" x 87" [1422mm x 1168mm x 2210mm]

20-20MW,  
20-20W

\*Domestic ground shipping information. Contact factory for export weight and dimensions.

#### Interior (H x W x D)

59-1/4" x 24-3/16" x 33-5/16" [1505mm x 614mm x 846mm]

#### Ship Weight\*

538 lb [244 kg]

#### Net Weight

419 lb [190 kg]



### CHECK FIRST

- Appliance must be installed level.
- Appliance must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.



### CLEARANCE

- Top: 2" [51mm]
- Left: 1" [25mm]
- Right: 1" [25mm]
- Back: 3" [76mm]



### ELECTRIC

20-20MW, 20-20W	V	Ph	Hz	A	kW	Cord & Plug
208-240V	208	1	50/60	10.8	2.2	NEMA 6-15p 15A-250V plug (U.S.A. only)
	240	1	50/60	12.5	3.0	
230V	230	1	50/60	12.0	2.8	plugs rated 250V CEE 7/7
						CH2-16p
						BS 1363
						AS/NZS 3112



### HEAT

#### Heat of rejection

20-20MW, 20-20W	Heat Gain qs, BTU/hr	Heat Gain qs, kW
	608	0.18

## CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.

Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | [alto-shaam.com](http://alto-shaam.com)