

AE-10DCA 10 Quart Countertop Planetary Mixer

773.376.0800 (P) • 773.376.2010 (F) • 3131 S. Canal St. Chicago, IL 60616

Lower Your Total Cost Of Ownership With American Eagle® Mixers! All-Inclusive Accessories, Competitive Pricing, And Reliability Make Us The Value Leader In The Industry.

Quality Design

- Powerful 7/8 HP Motor
- 100% Gear-Driven Transmission, Precision Milled, Heat Treated Steel Alloy Gears And Shafts
- Heavy Duty, Cast Iron and Steel Construction
- NSF Approved Heat Treated Enamel Paint Resists Rust, Scratches. And Dents
- Thermal Overload Protection With Reset
- Non-Skid Rubber Base
- ETL Certified To Conform To: NSF No. 8, CSA, CE Standards
- Heavy Duty, 6 Foot Hard Wired Power Cable And Plug









Standard Features

- Digital Control Panel with 30 Minute Timer
- 15 Fixed Speeds
- Safety Guard with Auto-Shutoff and Intergrated Ingredient Chute
- 1 Year Limited Warranty*

Standard Accessories

- High Polish 10 Quart Stainless Steel Bowl
- Aluminum Dough Hook
- Stainless Steel Wire Whip
- Aluminum Beater



Other Available Sizes

- AE-20GA 20 Quart Planetary Mixer
- AE-30GA 30 Quart Planetary Mixer
- AE-40PA 40 Quart Planetary Mixer
- AE-60N4A 60 Quart Planetary Mixer
- AE-80N4A 80 Quart Planetary Mixer (Special Order Only)




Quality • Value • Reliability



AE-10DCA 10 Quart Countertop Planetary Mixer

sales@ameagle.biz • www.americaneaglemachine.com

| Machine S _l | Machine Specifications | | | | | | | | |
|------------------------|----------------------------------|--------|--------------------|--------------|--------------------------|-----------------|-----------------------|--------|--|
| Model | Capacity** | Motor | Voltage V/HZ/PH | Transmission | Total Speed Options** | Safety Guard | Power Bowl Lift | Timer | |
| AE-10DCA | 10 Quart Bowl Max 5 lbs Dough | 7/8 HP | 115/60/1 | Gear Driven | 15 | Yes | No | 30 Min | |

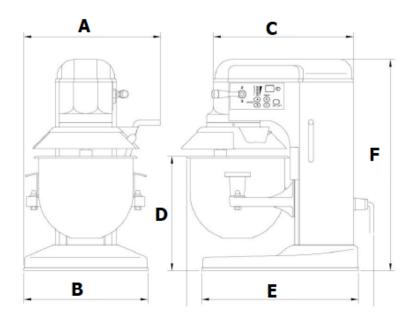

| Measurements | | | | | | |
|--------------|--------|-------------|--|--|--|--|
| Dimension | Inches | Centimeters | | | | |
| А | 13.4 | 34 | | | | |
| В | 11.8 | 30 | | | | |
| С | 13.4 | 34 | | | | |
| D | 12 | 30.5 | | | | |
| Е | 15 | 38 | | | | |
| F | 21.5 | 54.5 | | | | |

| RPM Speeds | | DC Motor Speed Control Setting | | | | | |
|--------------|---|--------------------------------|-----|-----|-----|-----|--|
| | | 1 | 2 | 3 | 4 | 5 | |
| Gear Shifter | 1 | 193 | 296 | 354 | 438 | 496 | |
| Setting*** | 2 | 206 | 315 | 378 | 468 | 529 | |
| | 3 | 249 | 381 | 456 | 564 | 638 | |

| Dimension | Dimensions and Shipping Information | | | | | | | | |
|-----------|-------------------------------------|---------------|---------------|---------------------|----------------|--|--|--|--|
| Model | Overall Dimensions | Foot Print | Net Weight | Shipping Dimensions | Ship Weight | | | | |
| AE-10DCA | 13.1" L x 17.7" W x 21.2" H | 11.8"L x 15"W | 52 lbs. | 21"W x 17"L x 25"H | 72 lbs. | | | | |

^{*}Warranty must be registered. Use of high speed with dough will void warranty, changing speeds improperly will void warranty



^{**}Capacity may be diminished depending on dough density and absorption ratio. Capacity listed is assuming a 60% absorption ratio.

^{***}To change gear speeds, first turn off the machine. Move the lever into position so that the gears lock, then resume mixing.