

Refrigeration Equipment 2-Solid Door Back Bar Cooler Stainless Steel 61" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738306 (KCHBB60SS)

2-Solid Door Back Bar Cooler
Stainless Steel 61" Long

Short Form Specification

Item No. _____

2-door Back bar refrigerator. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in 430 stainless steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in refrigeration circuit.
ETL Safety and Sanitation certified.
3/5 Years warranty.

Main Features

- External digital temperature display.
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.


Construction

- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

APPROVAL: _____

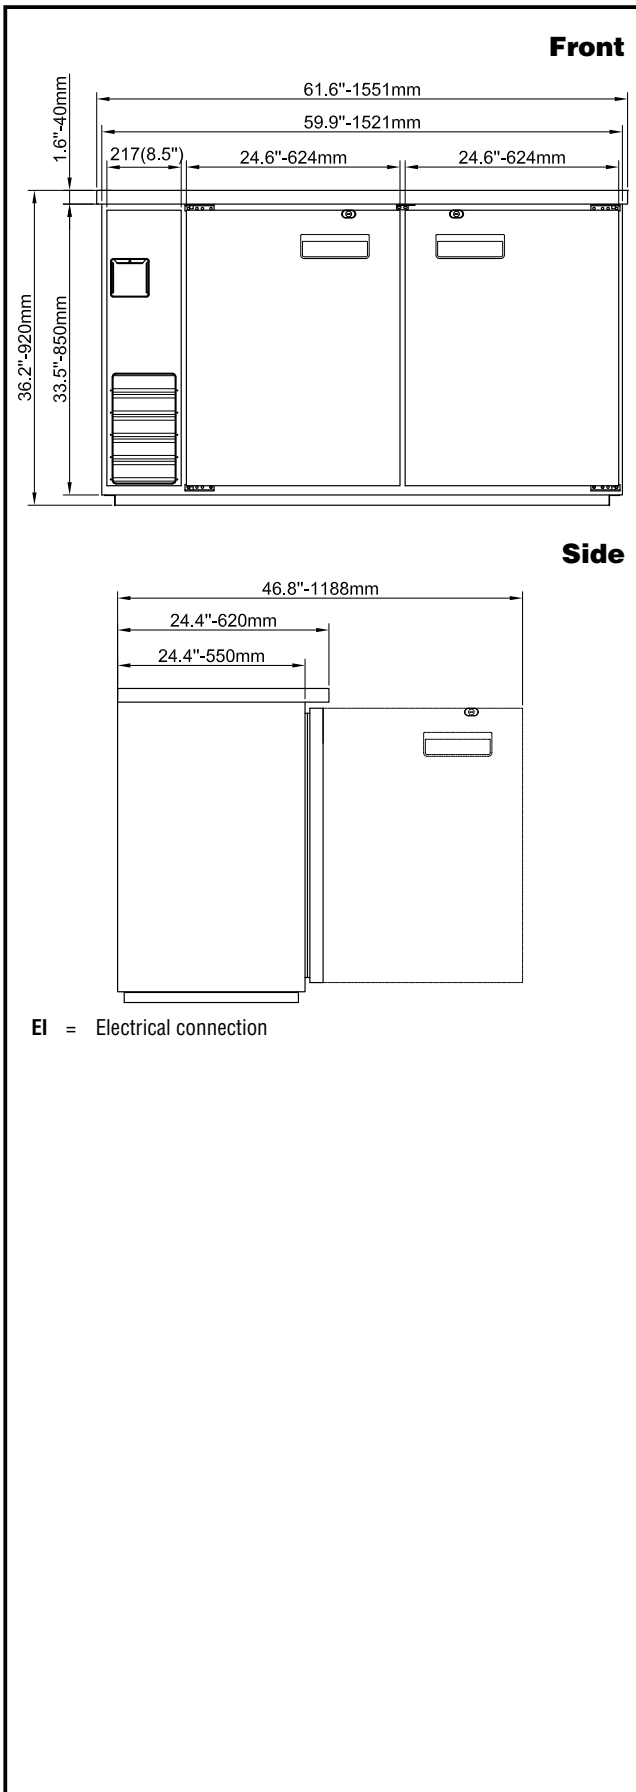

Electric

| | |
|-------------------------------|------------------|
| Supply voltage: | |
| 738306 (KCHBB60SS) | 115 V/1 ph/60 Hz |
| Electrical power, max: | 0.31 kW |
| Plug type: | USA NEMA 5-15P |

Capacity:

| | |
|------------------------|--------------|
| Gross capacity: | 16.6 cu.feet |
|------------------------|--------------|

Key Information:

| | |
|---|--|
| Door hinges: | 1 Left+1 Right |
| Capacity: | 16.6001 cu.ft. |
| External dimensions, Width: | 61 1/16" (1551 mm) |
| External dimensions, Depth: | 24 7/16" (620 mm) |
| External dimensions, Height: | 36 1/4" (920 mm) |
| Number and type of doors: | 2 Full |
| Internal Dimensions (depth): | 20 " / (508 mm) |
| Internal Dimensions (height): | 28 " / (711.2 mm) |
| Internal Dimensions (width): | 47 1/2" / (1206.5 mm) |
| Shipping height: | 41 5/16" (1050 mm) |
| Shipping weight: | 300 lbs (136 kg) |
| Shipping volume: | 40.11 ft ³ (1.14 m ³) |
| Number and type of grids (included): | 4 - Vinyl-Coated Steel |
| Type of external material: | Stainless Steel |
| Type of internal material: | Stainless Steel |
| Warranty: | 3 / 5 years |
| Approvals | ETL C&US;ETL SANITATION |

Refrigeration Data

| | |
|------------------------------------|--------------|
| Compressor power: | 1/5 hp |
| Operating temperature min.: | 32 °F |
| Operating temperature max.: | 41 °F |
| Condenser type: | Fin & tube |
| Defrost type: | Auto Defrost |

Sustainability

| | |
|-----------------------------|--------|
| Current consumption: | 3 Amps |
| Refrigerant type: | R290 |
| Refrigerant weight: | 110 g |