

COMMERCIAL

Refrigeration Equipment 2-Door Under Counter Refrigerator 61" Long



738291 (KCHUC60R)

2-Door Under Counter Refrigerator 61" Long

Short Form Specification

<u>ltem No.</u>

2-door refrigerator counter top, 35.5 inches tall, with exterior back panel, exterior bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature = environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. External temperature display.

R600a gas in refrigeration circuit. ETL Safety and Sanitation certified. 3/5 Years warranty.

ITEM #	_
MODEL #	
NAME #	
SIS #	_
AIA #	_

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- · Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- CFC and HCFC free (ecological refrigerant type: R600a).

Optional Accessories

- 1 ADJUSTABLE FOOT
- PNC 206445 🗅 PNC 880617 🗅
- Drawer Kit for 60" Mega Top & PNC 880617 Undercounter

APPROVAL:





Refrigeration Equipment 2-Door Under Counter Refrigerator 61" Long

115 V/1 ph/60 Hz

USA NEMA 5-15P

0.31 kW

15.5 cu.feet

1 Left+1 Right

61 1/4" (1555 mm)

29 15/16" (760 mm)

22 13/16" / (580 mm)

23 1/2" / (597 mm)

22 1/4" / (565 mm)

38 3/16" (970 mm)

291 lbs (132 kg)

43.7 ft3 (1.24 m3)

Stainless Steel

Polystyrene

3 / 5 years

SANITATION

1/8 hp

32 °F

41 °F

Fin & tube

3 Amps

R600a

3

80 g

Auto Defrost

2 - Vinyl-Coated Steel

ENERGY STAR: ETL C&US; ETL

35 1/2" (902 mm)

2 Full

Electric

Plug type:

Supply voltage:

Capacity: Gross capacity:

Door hinges:

738291 (KCHUC60R)

Key Information:

External dimensions, Width:

External dimensions, Depth:

External dimensions. Height:

Internal Dimensions (depth):

Internal Dimensions (height):

Internal Dimensions (width):

Number and type of grids

Type of external material:

Type of internal material:

Refrigeration Data

Operating temperature min.:

Operating temperature max.:

Compressor power:

Condenser type:

Refrigerant type:

Refrigerant weight:

GWP Index:

Sustainability Current consumption:

Defrost type:

Shipping height:

Shipping weight:

Shipping volume:


(included):

Warranty:

Approvals

Number and type of doors:

Electrical power, max:

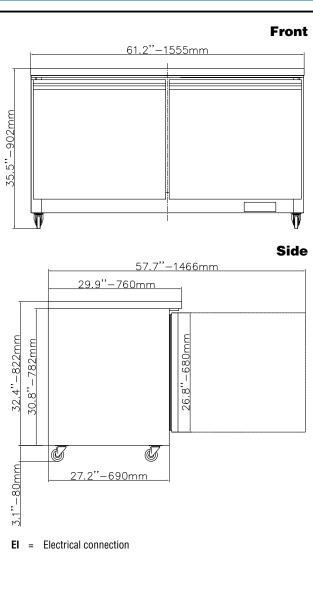



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.