



Job: Item No.:
Notes:
Model Number: ST181 ST1811

Heated Satellite Transport Carts

SPECIFICATIONS



ST1811

DESCRIPTION

ST Series Heated Satellite Transport Cabinets are designed to hold and transport cooked food warm and ready for serving. They are constructed of sanitary stainless steel and feature a bottom-mounted lift-out heating system with dial controls and blower heat for even air flow throughout the cabinet. Transport features include recessed door, transport latch, stainless steel handles, wrap-around bumper, wheel-ahead caster pattern and insulated turned-in seam construction.

SHORT FORM SPECIFICATIONS

Heated food transport cart, electric, insulated, welded, turned-in seam stainless steel construction with recessed door, stainless steel push handles and flush-mounted transport latch with finger grip. Lift-out, convection heater. Stainless steel tray racks with universal adjustable tray slides on 1.75" centers. Standard 3.5" spacing for 18"x26" and 12"x20" pans. Non-marking gray vinyl wrap-around bumper. Polyurethane casters in wheel-ahead caster pattern. 120V, 60Hz, 1Ph, 1650 watts, 13.7A, ten-foot 3 prong 3 wire rubber cord with 3-prong grounding plug. NEMA 5-15P.

FEATURES

- Bottom mounted, removable heating system with hold down device
- Dial thermometer with remote sensing bulb and protective cover
- Maximum temperature: 200°F (93°C); pre-heat to 160°F (71°C) in approx. 25 minutes
- All welded, turned-in seam, double-wall, stainless steel construction
- High density 1" thick fiberglass insulation in sides and door
- Stainless steel caster bolsters; 1"x1" perimeter tube supports welded to bolsters
- Heavy-duty, stainless steel push handles bolted to sides and back; reinforced back-up plates
 - o Three handles on ST181
 - o Five handles on ST1811
- Recessed, double panel door
- Stainless steel butt hinges with 3/8" dia. pins; welded to cabinet and door
- Flush mounted sliding latch with finger grip
- High temperature silicone gasket mounted cabinet
- All-swivel polyurethane 6" balloon casters; two fitted with brakes
- Offset wheel-ahead caster pattern
- Non-marking gray vinyl bumper set in heavy-duty extruded aluminum frame
- Removable tray racks with adjustable tray slides
 - o 1.75" centers; 3.5" standard spacing
 - o Secured in place with hold down device
- Accommodates 18"x26" sheet pans, 12"x20" steam table pans, GN 1/1 and GN 2/1 pans and 20"x20" glass racks

OPTIONS AND ACCESSORIES

- Menu card holder
- Locking paddle-style door latch
- Alternate electrical configuration
- Alternate caster sizes and types

CERTIFICATIONS



WARRANTY

One-year warranty for parts and labor.



CARTER-HOFFMANN
1551 McCormick Avenue, Mundelein, IL 60060
847.362.5500 • 800.323.9793
www.carter-hoffmann.com

Follow us



Form No.
ST Series_0821






Job: Item No.:
 Notes:
 Model Number: ST181 ST1811

Heated Satellite Transport Carts

SPECIFICATIONS

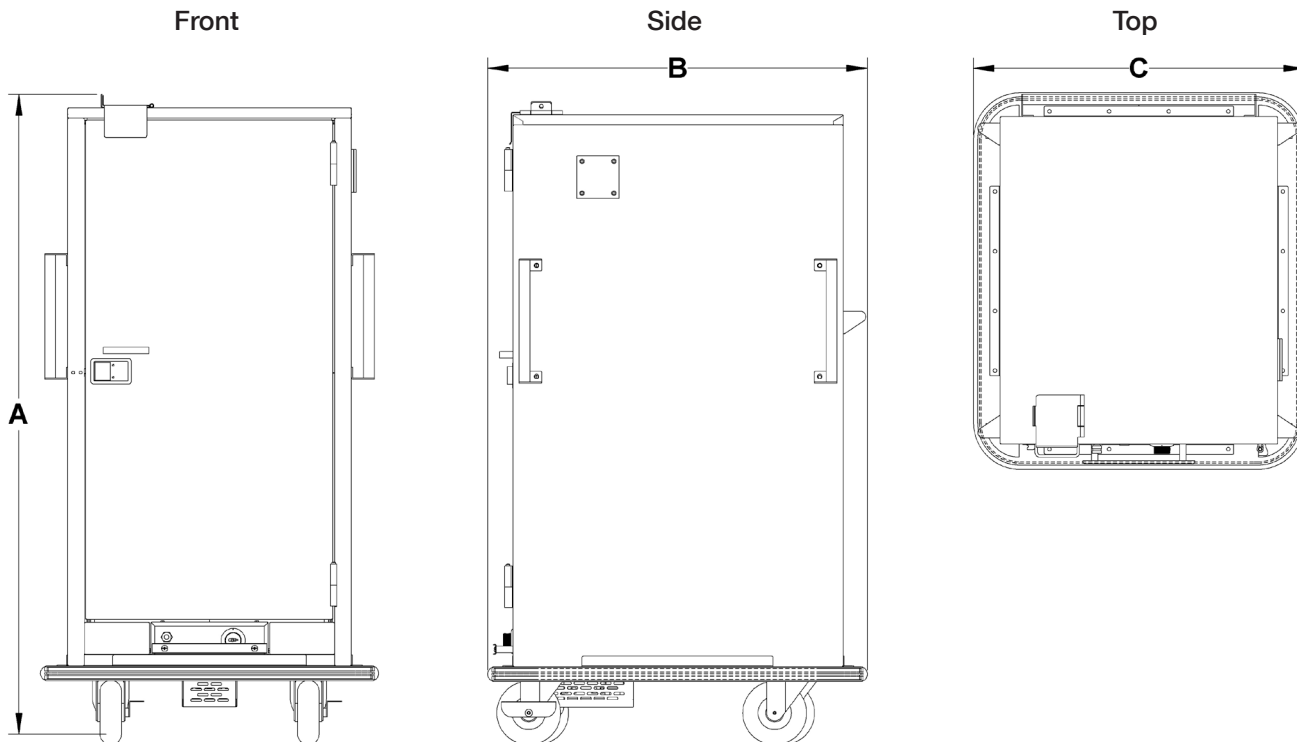

CLEARANCES

A clearance of at least 2” from any wall or combustible material. A clearance of least 36” at the front of the cabinet is required to open the door. Cabinet must be placed on a solid level floor.

ELECTRICAL DATA

Single electrical connection.
 120 Volts, 1650 Watts, 13.7 Amps, 60Hz, single phase.
 Ten foot three wire rubber cord with 3-prong grounding plug. NEMA 5-15P.



Model Number	Pan Capacity*		Inside Working Height		Height [A]		Depth [B]		Width [C]		Caster Diameter		Shipping weight	
	18"x26"	12"x20"	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
ST181	6	12	23 ^{1/4}	591	37	940	36	914	31 ^{1/2}	800	6	152	252	114
ST1810	13	26	45 ^{1/2}	1156	59	1499	36	914	31 ^{1/2}	800	6	152	397	180

*Pan spacing at 3.5” (89mm). Tray slides adjustable at 1.75” increments.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Carter-Hoffmann exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.