SANDWICH UNIT REFRIGERATOR

Model: SW60N12C-FB

Natural Refrigerant R-290 Model

60" Cutting Top Sandwich Unit Refrigerator with Solid Door - 12 Pans Front Breathing

Stainless steel front, top and end panels, aluminum back and interior.



Options and Accessories

| (upcharge and lead times may apply) | |
|---------------------------------------|----------------------------|
| Stainless steel interior | Flat lid |
| Stainless steel back | Vision panel lid |
| Additional epoxy coated steel shelves | Rear mounted cutting board |
| Stainless steel shelves | Composite cutting board |
| Overshelves (single or double) | Door locks |
| Drawers in leiu of door(s)* | Modified pan opening |

Consult factory for other model configurations, options and accessories. *Drawers hold (1) 12 x 20 x 6 pans per drawer





| Project Name: | |
|------------------|-----------|
| | |
| Model Specified: | |
| | |
| Location: | |
| | |
| Item No: | Quantity: |
| | |
| AIA #: | SIS #: |

Standard Model Features

REFRIGERATION SYSTEM

| Performance rated refrigeration system |
|--|
| Natural, environmentally safe, high efficiency R-290 refrigerant ¹ |
| Unique air flow distribution allows pan product to maintain 33° - 41°F |
| Automatic, hot gas condensate evaporator |
| Non-corrosive, plasticized fin evaporator coil |
| Easily serviceable, back mounted compressor |
| Expansion valve system |

CABINET ARCHITECTURE

| 2" non-CFC polyurethane foam insulation |
|---|
| Smooth, polished chrome door handles |
| Spring loaded, self closing doors |
| Magnetic snap in Santoprene™ door gaskets |
| Heavy duty, epoxy coated steel shelves |
| 19" deep, full length nylon cutting board |
| Insulated lid |
| Completely enclosed, vented and removable case back |
| 3 3/4" casters |

MODEL FEATURES

| (12) $1/6$ size recessed pans, 4" deep |
|--|
| Electronic control, off-cycle defrost |
| Removable interior tub below pans |
| Field rehingeable doors |
| |

¹ R-290 refrigerant meets all federal and state regulatory requirements.

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space. For proper operation, the area under and in front of the cabinet <u>must</u> not be obstructed in any way.

APPROVAL:

Model Specifications

| DIMENSIONAL DATA | |
|--|-----------------|
| Net Capacity (cubic feet) | 17.0 (481 cu l) |
| 1/6 Size Pans (4" deep) | 12 |
| Width, Overall (inches) | 60 (1524 mm) |
| Depth, Overall (inches) (including cutting board & bumpers) | 38 1/4 (972 mm) |
| Depth, Cutting Board (inches) | 19 (483 mm) |
| Height, Overall (inches) (including 3 $3/4$ " casters) | 41 (1041 mm) |
| Shelf Area (square feet) | 8.1 (0.8 sq m) |
| Number of Shelves | 2 |
| Number of Doors | 2 |
| Interior Depth (inches) | See Drawing |
| Interior Height (inches) | 26 1/4 (667 mm) |
| Interior Width (inches) | 56 (1422 mm) |

REFRIGERANT DATA

| Condensing Unit Size (H.P.) | |
|-----------------------------|--|
| Capacity (BTU per hour)* | |

ELECTRICAL DATA

| Voltage (International) | 115/60/1 (220/50/1) |
|--|---------------------|
| Total Amps (International) | 5.7 (3.6) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |

1/3+

2560


SHIPPING DATA


| Weight (pounds) | 375 (171 kg) |
|--------------------------|------------------|
| Height - Crated (inches) | 43 1/4 (1099 mm) |
| Width - Crated (inches) | 68 (1727 mm) |
| Depth - Crated (inches) | 37 1/4 (946 mm) |


* Rating @ +25°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Model Plan Views

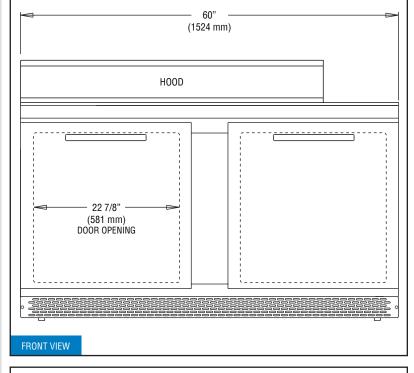

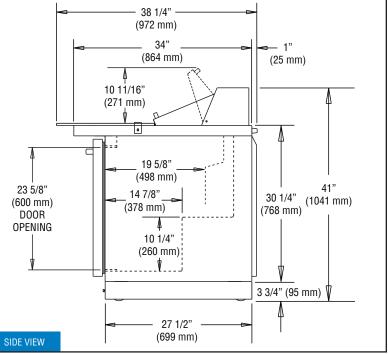

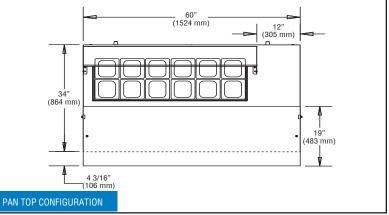

REVISED: 3/13/24