

Project:	
Location:	_
Item #:	Quantity:
Model #:	

MODEL: ICT-VIP1490B1/3GLASSTOP

**COUNTER TOP:** 

Refrigerated ingredient displays - Glass top

Important: Do only introduce refrigerated products! For daily cleaning, remove products and disconnect unit.



## **General Strengths**

- Sanitation. The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- Lighting. Interior cabinet includes LED lighting, for brighter lighting and energy efficiency, LED saves 90% more energy compared to traditional fluorescent bulbs. Considerably increases product visibility.
- Control systems. Higher precision in managing temperature settings. The ability to adjust temperature ranges to meet end user's requirements.
- 100% Tested. All condenser units tested 100%, in helium chambers to refrigerant leak detections.
- Certified. Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. EQA audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); ISO 45001:2018 (Prevention and Worker Safety)

		Dimensions inches) (mm		Doors	Ref.	Ref.Weight (Lbs.) (gr.)	Temperature Range (ºF)	Cond. Unit (H.P)	Capacity (Cu.Ft.)	Case Amps	Net weight
MODELS	W	D	Н				( <u>°C)</u>		(L)	115V	(Lbs.) (Kg.)
ICT-VIP1490B1/3GLASSTP	58-3/8	16-1/4	17-3/4	_	R600	R600 0,08 39°F/41°F 1/6 1.55	1/6	1.82	132		
	1493	413	450			40	4ºC/6ºC	1,0	44	1.02	60

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

















Project:		
Location:		
Item #:	Quantity:	
Model #:		

MODEL: ICT-VIP1330B1/3GLASSTOP

**COUNTER TOP:** Refrigerated ingredient displays – Glass top

## **STANDARD FEATURES**

#### Exterior

- AISI 304 Stainless Steel,
- Safety glass on the top, closed in the front (facing the customer) and open in the back (facing the operator),
- Sliding doors on the back,
- Levelling feet.

### Interior

- AISI 304 Stainless Steel,
- Sealed interior floors and rounded cabinet corners,
- Stainless steel 6" deep pans, included.

## **OPTIONAL FEATURES**

✓ Electrical connections is: 220 - 230 V / 1 ph / 50Hz (plug type varies).

#### Insulation

- Polyurethane with high density 40kg/m³, CFS free, zero ODP and low GWP.
- Low GWP & Zero ODP effect.

## Refrigeration

- Digital temperature controller,
- Cold wall refrigeration system,
- Refrigeration capacity: 973 Btu/h (14ºF) / 190 W (-10ºC).

#### Electrical



- Cord and NEMA 5-15P plug,
- Electrical connection is 115V/ 1ph / 60 Hz.
- ETL Listen to UL471 Standard and Sanitation classified to NSF7.















Project:	
Location:	
Item #:	Quantity:
Model #:	


MODEL: ICT-VIP1330B1/3GLASSTOP


COUNTER TOP:

Refrigerated ingredient displays – Glass top

# **PLAN VIEW**

**ELEVATION RIGHT VIEW** 

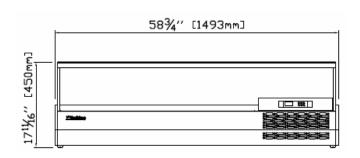



# **PLAN VIEW**

