



RC35 - 50Hz Remote Condensing System High Capacity

Features

Provides high-capacity refrigeration for frozen dessert dispensing. Maximum total length of refrigeration line set is 150 feet (45.7 m).

Refrigeration System


- One, approximately 12,500 btu/hr. compressor. R449A. (BTU s may vary based on compressor used.)
- High capacity condensing system

750 N. Blackhawk Blvd. Rockton, Illinois 61072 800-255-0626 Phone 815-624-8333 Fax 815-624-8000 www.taylor-company.com info@taylor-company.com







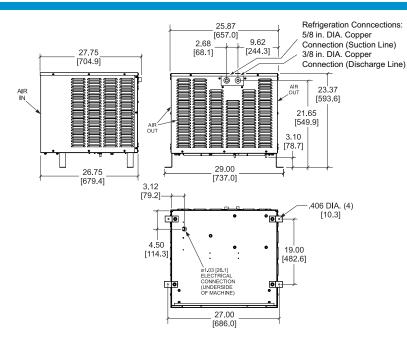

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH [1.5mm]).

Weights	lb.	kg	
Net	195.0	61.2	
Crated	205.0	78.4	
*For reference only			
	cu. ft.	cu. m	
Volume	14.3	.405	
Dimensions	in.	mm	
Width	25-7/8	651	
Depth	26-3/4	679	
Height	23-3/8	594	
Floor Clearance	3-3/32	79	
Mounted on outdoor leg	<i>js</i>		
Electrical	Maximum	Minimum	Poles (P)
	Fuse Size	Circuit Ampacity	Wires (W)
380-415/50/3n~ Air	7	5	4P 5W

Specifications

Electrical

One dedicated connection required. Manufactured to be permanently connected. See the electrical chart for proper electrical specifications.

Refrigeration Connections

5/8 in. O.D. on suction (low-pressure) side. 3/8 in. O.D. on discharge (high-pressure) side. (Refrigeration lines are not provided.)

Air-Cooled

Minimum Clearance: 12 in. (152 mm) on 3 sides. The air deflector must be installed on the condenser side, if the floor clearance is less than 5 in. (127mm). Minimum air clearances must be met to ensure adequate airflow for optimum performance.

Options

• Outdoor use

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.

(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.) $\label{eq:constraint}$

Continuing research results in steady improvements. Therefore, these specifications are subject to change without notice.

Bidding Specs					
Electrical: Volt		Hz	ph		
Neutral:	□Yes	□No	Cooling: 🗆 Air	□Water	□NA

Options:

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

Authorized Taylor Distributor



750 N. Blackhawk Blvd. Rockton, Illinois 61072 www.taylor-company.com