



Stainless steel cabinet construction

Stainless steel interior and exterior (galvanized steel back & bottom).



Temperature range between -5°F ~ 10°F

Air guard on rear wall ensures proper air circulation and cooling.



Hydrocarbon refrigerants (R-290)

Increases energy HFC refrigerants. It is safer for the environment and does not cause ozone depletion.



Visual and audible door open alarm

Alarm sounds when doors are not completely closed to protect against food spoilage





Exterior Dimensions (inches/mm)

L D H 60 1/2" 30" 36 27/32" 1537 mm 762 mm 936 mm

Weight (lbs/kg)

Net Weight Ship Weight 267 lbs 330 lbs 121 kg 149.7 kg

* Depth does not include 3" for door handle & rear spacers * Height does not include 5" (127 mm) for casters

Cabinet construction

- Cyclopentane Insulation Contains no hydro-fluorocarbons (HFCs) and is environmentally friendly.
- •Epoxy coated wire shelves with adjustable shelving height.
- 6" back splash guard
- · 2 shelves per compartment.
- •Four 4" Diameter swivel casters with front brakes standard.

Refrigeration

- Self-contained system, rear mounted compressor.
- •Electrodeposition coated evaporator increases performance by maintaining the heat transfer rates over the life of the evaporator and reducing potential corrosion.
- •Innovative hot gas frame heating system reduces condensation and increases energy.

Design & Features

- Self-diagnostic digital temperature control & monitor system.
- Digital display allows for easy monitoring.
- Digital controls include manual defrost for easy maintenance.
- Rounded corner design gives a stylish appearance and reduces chances of injury.


Doors

- Self-closing doors
- Durable door gasket with easy replacement.
- Lifetime guaranteed heavy duty all metal door handles. (Ni-Cr Plated)


Optional Features & Accessories

- 2.5" diameter casters available.
- · Additional shelves are available.

Front view Side view

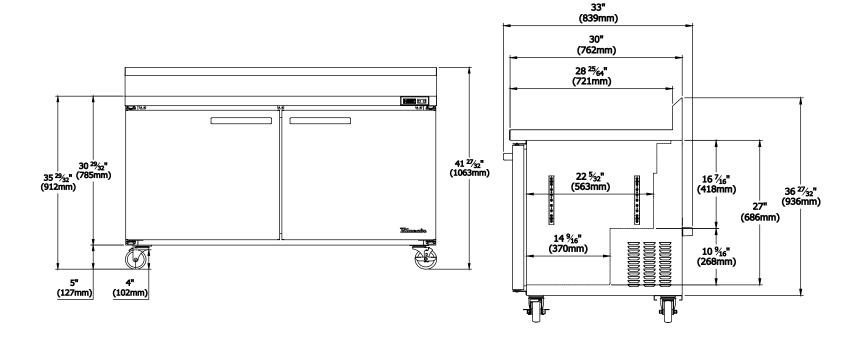

Top view

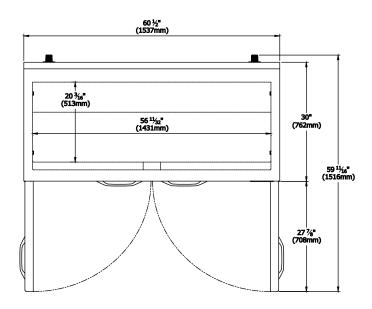

Doors Capacity 16.7 Cu.Ft. Shelves Refrigerant R-290 Temperature -5°F ~ 10°F Range Easy Sliding Condensing Unit Maintenance 9.8 ft long (3m) flexible three Connection wire cord with modeled plug HP 1/2 HP Voltage 115V/60Hz 6.2 **Amps** NEMA 5-15 **NEMA** Config.



This product may exprose you to chemicals including Diisononyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to www.P65War nings.ca.gov.

Le produit peut vous exposer á des agents chimiques incluant le Diisononyl Phthalate(DINP), reconnu par l'Esat de Californie comme causant le cancer, Pour de plus amples renseignements, consulter le site www.P65Warnings.ca.gov.





Conforms to NSF/ANSI 7(ETL)



Blue Air has right to change specifications without further notice.





