

## Refrigeration Equipment 2-Door Under Counter Refrigerator 48" Long 32" Tall

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738332 (KCHUC48R-32)

2-Door Under Counter  
Refrigerator 48" Long 32" Tall

### Short Form Specification

Item No. \_\_\_\_\_

2-door refrigerator counter top, 32 inch tall, with exterior back panel, exterior bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves.

External temperature display.

R600a gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- ADA Height Compliant

### Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


### Sustainability

- CFC and HCFC free (ecological refrigerant type: R600a).
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

### Optional Accessories

- 1 ADJUSTABLE FOOT PNC 206445
- Drawer Kit for 48" Mega Top, Salad Top, Undercounter and L/R section of 70" Salad & Mega Top and 72" Undercounter PNC 880616

APPROVAL: \_\_\_\_\_

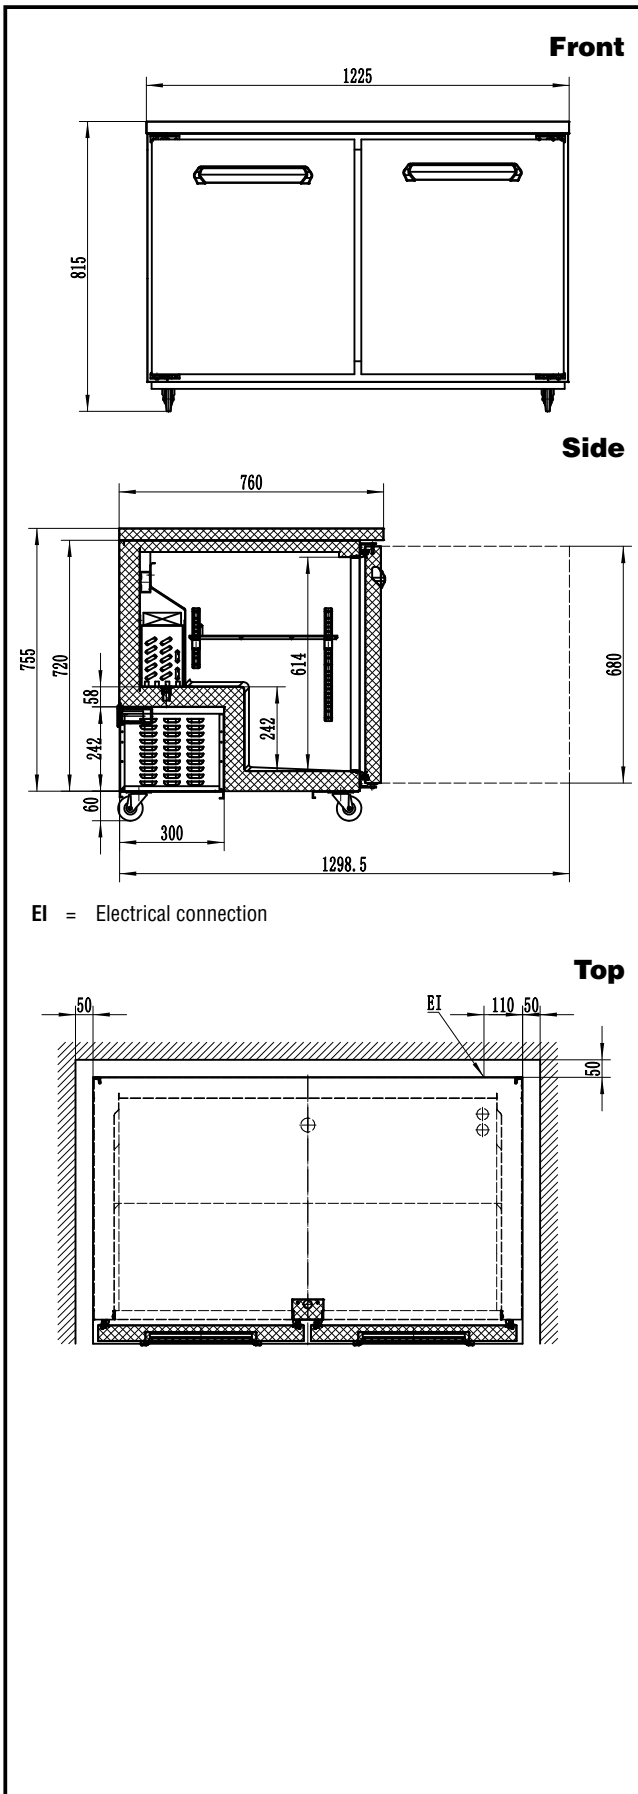

## Electric

<b>Supply voltage:</b>	738332 (KCHUC48R-32)	115 V/1 ph/60 Hz
<b>Electrical power, max:</b>		0.31 kW
<b>Plug type:</b>		USA NEMA 5-15P

## Capacity:

<b>Gross capacity:</b>	12 cu.feet
<b>Number and type of grids (included):</b>	2 - 538x425

## Key Information:

<b>Door hinges:</b>	1 Left+1 Right
<b>External dimensions, Width:</b>	48 1/4" (1225 mm)
<b>External dimensions, Depth:</b>	29 15/16" (760 mm)
<b>External dimensions, Height:</b>	32 1/16" (815 mm)
<b>Number and type of doors:</b>	2 Full
<b>Internal Dimensions (depth):</b>	22 13/16" / (580 mm)
<b>Internal Dimensions (height):</b>	23 1/2" / (597 mm)
<b>Internal Dimensions (width):</b>	42 1/2" / (1080 mm)
<b>Shipping height:</b>	34 13/16" (885 mm)
<b>Shipping weight:</b>	227 lbs (103 kg)
<b>Shipping volume:</b>	31.62 ft <sup>3</sup> (0.9 m <sup>3</sup> )
<b>Type of external material:</b>	Stainless Steel
<b>Type of internal material:</b>	Polystyrene
<b>Warranty:</b>	3 / 5 years
<b>Approvals</b>	ETL C&US;ETL SANITATION

## Refrigeration Data

<b>Compressor power:</b>	1/8 hp
<b>Operating temperature min.:</b>	32 °F
<b>Operating temperature max.:</b>	41 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	Auto Defrost

## Sustainability

<b>Current consumption:</b>	3 Amps
<b>Refrigerant type:</b>	R600a
<b>Refrigerant weight:</b>	75 g

