BACK BAR EQUIPMENT

Model: **BB79SNSSGD**

Natural Refrigerant R-290 Model

79" Back Bar Display Cooler with Hinged Glass Doors Shallow Depth

Stainless steel exterior, countertop, interior back and side panels with reinforced stainless steel floor.



Options and Accessories

(upcharge and lead times may apply)		
Condensing unit on right		
Wine rack		
Casters or legs		
Standard depth		
Pass-thru (consult factory)		

Consult factory for other model configurations, options and accessories.

* Adding a Riser Base increases overall height 2"

-			
	Project Name:		
	Model Specified:		
	Location:		
	Item No:	Quantity:	
	AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Performance rated front breathing refrigeration system

Natural, environmentally safe,

high efficiency R-290 refrigerant¹

Automatic, hot gas condensate evaporator

Extra large, balanced evaporator coil

CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation Front, rear and side venting louvered grills Double pane, tempered low emissivity hinged glass doors Magnetic snap in door gaskets Cylinder keyed security lock in each door Stainless steel reinforced threshold

MODEL FEATURES

Low profile cabinet design
Electronic controller with digital display & hi-low alarm
LED interior lighting
Off-cycle defrost
Easily accessible and serviceable slide-out condensing unit

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

Model Plan Views



Net Capacity (cubic feet)	22 (623 cu l)
Width, Overall (inches)	79 (2007 mm)
Depth, Overall (inches) (including handles & bumpers)	24 5⁄8 (625 mm)
Depth, Body Only (inches) (less doors)	21 (533 mm)
Height, Overall (inches)	34 ¾ (883 mm)
Capacity: # Barrel Kegs	3
Capacity: # Straight Wall Kegs	3
Capacity : # 1/6 Size Kegs	12
Number of Doors	3
Number of Shelves	6

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/4
Capacity (BTU per hour)*	2500

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	3.8 (3.4)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Weight (pounds)	490 (222 kg)
Height - Crated (inches)	46 (1168 mm)
Width - Crated (inches)	88 (2235 mm)
Depth - Crated (inches)	42 (1067 mm)

* Rating @ +25°F evaporator, 90°F ambient


Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Toll-Free: 800-523-7138 Phone: 215-244-1400

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

> esigned and in the USA

Fax: 215-244-9579







Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

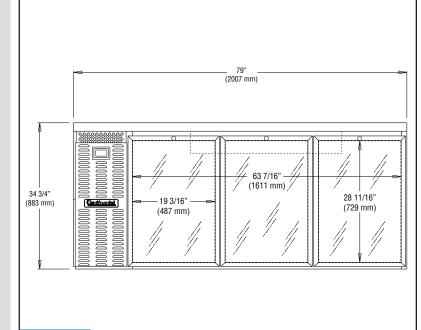

FRONT VIEW

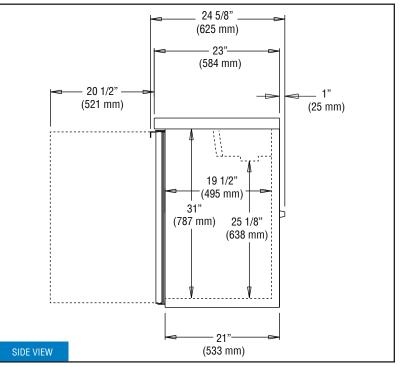

IMPORTANT NOTE: Models are completely front breathing and take in and exhaust air through the front grill. For proper operation, the area in front of the cabinet <u>must</u> not be obstructed in any way. A clearance of 1" on the back and 3" on the sides is recommended.