

SLIMLINE DROP-IN SEALED WELL ELECTRIC UNIT



DISLSW-2-120 Shown

Item #: _____ Qty #: _____
 Model #: _____
 Project #: _____

FEATURES:

Fiberglass insulation between each compartment
 12" x 20" die stamped openings
 Full stainless steel construction inside and out.
 Remote control panel
 Units are supplied with drains for wet or dry application
 Includes 1" I.P.S. Drain(s) with Gate Valve

MATERIAL:

TOP: 18 gauge #304 stainless steel with die stamped pan openings and self rimmed. (12" x 20" opening)
BODY: 20 gauge galvanized



ELECTRICAL:

120V units yield 1100 Watts
 208V/240V dual voltage units yield 825 Watts at 208V and 1100 Watts at 240V
 Infinite control knobs
 Indicator lights
Unit to be hard wired in the field. Optional cord sets available, please consult the factory for more information

Model #	O.A. Length	O.A. Width	# of Wells	Cut-Out Size W x L	Volts	Amps	Watts	Approx. Wt.	Cu. Ft.
DISLSW-2-120	46-1/2"	16-1/2"	2	15-1/4" x 45-1/4"	120	18.33	2200	125 lbs.	12.8
DISLSW-3-120	68-1/2"	16-1/2"	3	15-1/4" x 67-1/4"	120	27.51	3300	150 lbs.	18.6
DISLSW-2-240	46-1/2"	16-1/2"	2	15-1/4" x 45-1/4"	208/240	3.94/9.16	1600/2200	125 lbs.	12.8
DISLSW-3-240	68-1/2"	16-1/2"	3	15-1/4" x 67-1/4"	208/240	11.90/13.34	2475/3300	150 lbs.	18.6
DISLSW-4-240	90-1/2"	16-1/2"	4	15-1/4" x 89-1/4"	208/240	15.88/18.32	3300/4400	174 lbs.	24.5

NOTE: Units are not designed to cook or heat frozen or refrigerated foods. Food placed in tables should already be hot, and the table will maintain the proper temperatures

Optional Accessories:


Visit our website for additional Accessories

SU-90

Automatically fills & maintains water level. For DISW, DISLSW, SW & HDSW Series. Requires Manifold Drain Assembly (Except HDSW series). See below.







Manifold Drains (Per Well)
 Add The Suffix **-M** To The Model Number.



Thermostatic Controls
 Add The Suffix **-T** To The Model Number.

Cord with NEMA Plugs


SU-P-234	8' Cord with NEMA 5-15P plug for 1 well, 120v Units	
SU-P-231	8' Cord with NEMA L5-30P plug for 2 or 3 well, 120v Unit	
SU-P-232	8' Cord with NEMA 6-20P plug for 1, 2, 3 or 6 well (6 well unit requires 2 Cords), 240v Units	
SU-P-233	8' Cord with NEMA L6-30P plug, for 4 or 5 well, 240v Units	

Adapter Bars

SU-45A 12" x 1" Adapter Bar.

3-Phase Upgrade

SU-72 Upgrade to 240 volt units to 3 Phase Wiring.






DIMENSIONS and SPECIFICATIONS

TOL ± .125"

ALL DIMENSIONS ARE TYPICAL

DISLSW-4-240 Shown

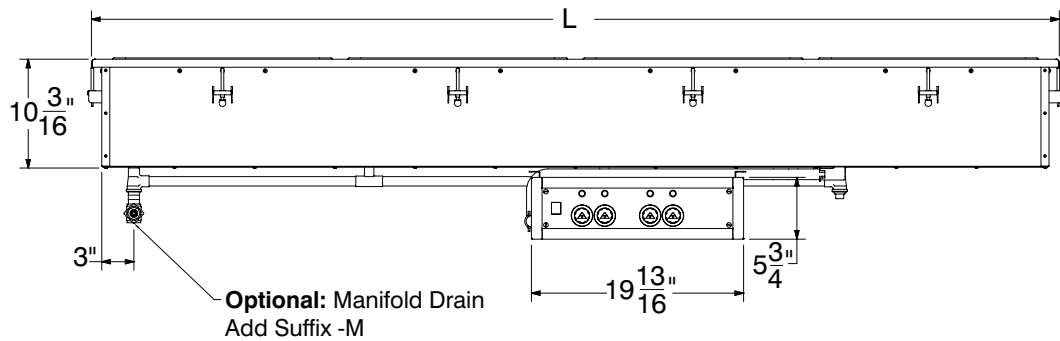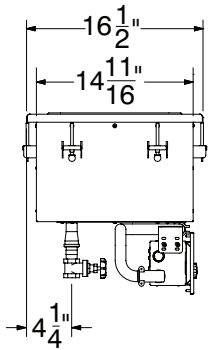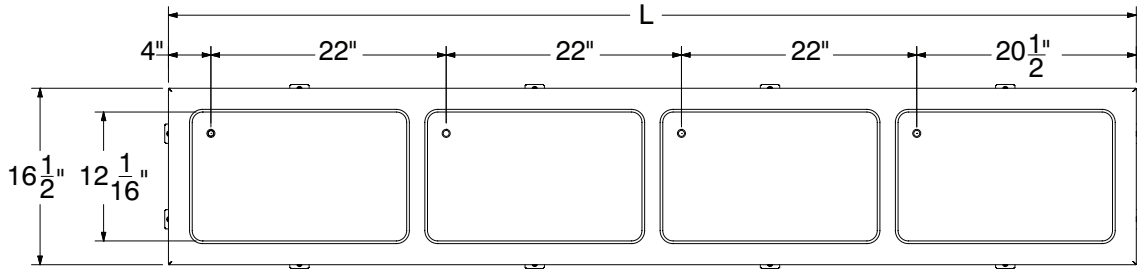

CONTROL PANEL SPECS

Model #	Cut-Out Size Length (A)	Cut-Out Size Height (B)	Front Panel Length (C)
DISLSW-2	12-3/8"	4-1/2"	13-1/2"
DISLSW-3	12-3/8"	4-1/2"	13-1/2"
DISLSW-4	18-3/4"	4-1/2"	19-7/8"

**Unit to be hard wired in the field. See Accessories for optional Cords.
Please consult the factory for more information.**

