# RD93AHC WORKTOP DRAWER 刀 П FRIGERATOR

Project:	AIA#
tem:	
ocation:	SIS#
Approved:	1

Hydrocarbon Series

MODEL: WTRD93AHC-2





# **CABINET CONSTRUCTION**

7 Year Parts/Labor Warranty

- Stainless steel front, sides, door, drawers and grille (galvanized back) & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel worktop for added durability
- 16 Gauge stainless steel top
- Full electronic control
- Interior thermometer is standard
- 4" Foamed-in-place backsplash
- Snap-in drawer gaskets
- Self-closing doors with 120° stay-open feature, on cartridge style hinges
- Door opening includes low wattage, anti-condensate heaters
- Magnetic gasket attached to each door for positive seal
- Four (4) epoxy-coated steel wire shelves
- Upper and lower pull-out drawers accommodate 6" deep pans
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawer from being inadvertently pulled off cabinet
- . 6" Casters, (2) with brakes standard
- Field-reversible doors

**OPTIONS & ACCESSORIES** 

- Stainless steel back
- Stainless steel interior
- Additional shelves
- · Shelf clips
- · Right or left hinged door
- Locks (solid doors only)
- Bun rack
- Wire shelf divider
- Cutting board
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- · Low profile casters
- Roller kit
- Flat-top with no backsplash (-FLT)
- Remote option\* (see note on back on page)

# REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	WTRD93AHC-2	
EXTERNAL DIMENSIONAL DATA		
Width Overall	93 1⁄8"	
Depth Overall with Handle & Bumper	35 ¾"	
Height Overall with 6" Casters	39 ½"	
Number of Drawers	2	
Drawer Openings	21 5/8" x 10 3/8" 21 5/8" x 10 1/4"	
Depth with Drawer Extended	57 ½"	
Number of Door	2	
Depth of Door Open 90°	55 ½"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	29.7	
Internal Width Overall (in)	89"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	25"	
No. of Shelves	4	
ELECTRICAL DATA		
Full Load Amperes	5.0	
Voltage	115/60/1	
Nema Plug (8' cord)	5-15P	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	2629	
Heat Rejection (BTU/Hr)	3943.5	
Charge (lbs/grams/ounces)	0.3086 / 140 / 4.9	
SHIPPING DATA		
Gross Weight - Crated	562 lbs	
Height - Crated	48"	
Width - Crated	96"	
Depth - Crated	37"	

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4°. Metric dimensions (MM).





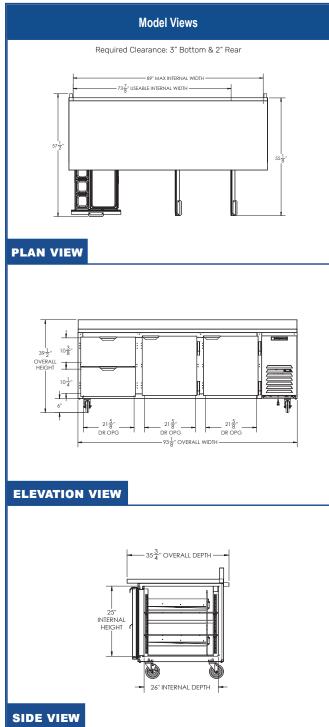

## **ELECTRICAL CONNECTION**



Unit pre-wired at factory and include 8' long cord and plug set.



