



# ARTISAN 2 DECK OVEN



**Artisan Stone Deck Oven, Individual Programmable Control per Chamber, Individual Shot Steam per Chamber, Standard One Piece Shipment, Single Electrical Connection, Single Water & Drain Connection, Stainless Steel Construction, Multiple Deck Heights (6", 8", 10", 12"), 1" Thick Refractory Stone Deck, 99 Hour Delay-Start Timer, Standard Heavy Duty Legs with Casters, Economy Mode for Energy Saving**



PROJECT \_\_\_\_\_

ITEM NO. \_\_\_\_\_

NOTES \_\_\_\_\_

MODEL NUMBER: **2 T**



\*SHOWN IN 2T3

**FEATURES**

- Independent Baking Decks (up to 4) with Digital Control Panels
- Deck Capacity of 1, 2, 3 or 4 Pans
- Deck Heights
  - 6" (152mm)
  - 8" (204mm) STANDARD
  - 10" (254mm)
  - 12" (305mm)
- 600°F (316°C) Max Bake Temperature
- Independent Temperature Control for Upper & Lower Deck Elements, Plus Front Temperature Loss Control
- Independent Shot Steam Per Deck with Steam Box On/Off Control
- 99 Hour Delay Start Up Timer & Economy Mode

**CONSTRUCTION**

- Stainless Steel Construction
- 1" (25 mm) Refractory Stone Deck
- Single Point Connection for Electrical, Drain & Water
- Fully Insulated Illuminated
- Fully Retracting Doors (Save Space when Loading & Unloading)
- Legs with Swivel Casters (2 locking)
- One Piece Shipment

**OPTIONS & ACCESSORIES**

- Water Filter (50-1530)
- Standard Proofer for 1 - 2 Decks (ES2T)
- Low Profile Proofer for 3 Decks (ES2TP)
- Stainless Steel Deck
- Non-Functional Eyebrow Canopy (EH2T)
- Loaf Loader (LL)
- Single Phase Electrical
- 380-415V Electrical Configuration

**CLEARANCES**

- 1" (25mm) Sides & Back
- 6" (153 mm) Top

**WARRANTY**


- One Year Labor & Two Year Parts

**PLEASE NOTE**

- One Single Electrical Drain, Water Connection. Multiple Decks are inter-connected.
- Electrical Inlet located at the back on top right hand corner.
- For Steam Efficiency, use minimum water inlet pressure 50 PSI.
- To prevent steam system scale issues, install water softener rated for a minimum of 3 GPM.



2T - End Loaded

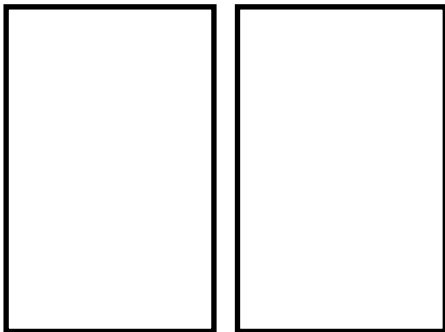



PROJECT \_\_\_\_\_

ITEM NO. \_\_\_\_\_

NOTES \_\_\_\_\_

MODEL NUMBER: **2 T**

### DECK HEIGHT CONFIGURATOR

#### 1. Optional Eyebrow Canopy



**Dimensions:** 5" H (128mm) x 54 1/2"W (1384mm) x 46 1/2" D (1181mm)

#### 2. Top Cover Plate



**Dimensions:** 2 1/2" H (64mm) x 54 1/2"W (1384mm) x 46 1/2" D (1181mm)

#### 3. Deck Choice #1 - 6" Internal Chamber Height



**Exterior Dimensions:** 13 5/8" H (347mm) x 54 1/2"W (1384mm) x 46 1/2" D (1181mm)

**Interior Dimensions:** 6" H (153mm) x 37 1/2"W (953mm) x 30" D (762mm)

#### 4. Deck Choice #2 - 8" Internal Chamber Height



**Exterior Dimensions:** 15 5/8" H (397mm) x 54 1/2"W (1384mm) x 46 1/2" D (1181mm)

**Interior Dimensions:** 8" H (203mm) x 37 1/2"W (953mm) x 30" D (762mm)

#### 5. Deck Choice #3 - 10" Internal Chamber Height



**Exterior Dimensions:** 17 5/8" H (447mm) x 54 1/2"W (1384mm) x 46 1/2" D (1181mm)

**Interior Dimensions:** 10" H (253mm) x 37 1/2"W (953mm) x 30" D (762mm)

#### 6. Deck Choice #4 - 12" Internal Chamber Height



**Exterior Dimensions:** 19 5/8" H (497mm) x 35 3/4"W (908mm) x 46 1/2" D (1181mm)

**Interior Dimensions:** 12" H (303mm) x 37 1/2"W (953mm) x 30" D (762mm)

#### 7. Base Plate



**Dimensions:**

2 1/2" H (64mm) x 54 1/2"W (1384mm) x 46 1/2" D (1181mm)

#### 8. Standard Legs with Casters



**Dimensions:**

**One Deck:** 33" H (838mm) x 54 1/2"W (1384mm) x 37 1/2" D (952mm)

**Two Deck:** 24" H (610mm) x 54 1/2"W (1384mm) x 37 1/2" D (952mm)

**Three Deck:** 21" H (533mm) x 54 1/2"W (1384mm) x 37 1/2" D (952mm)

**Four Deck:** 9" H (227mm) x 54 1/2"W (1384mm) x 37 1/2" D (952mm)

#### 9. Optional Proofer



**Standard Proofer Dimensions (For 1 - 2 Chambers):**

32 1/8" H (817mm) x 54 1/2"W (1384mm) x 37 1/2" D (953mm)

**Shipping Weight:** 590 lbs (268 kg)

**Low Profile Proofer Dimensions (For 3 Chambers):**

24 5/8" H (625mm) x 54 1/2"W (1384mm) x 37 1/2" D (953mm)

**Shipping Weight:** 590 lbs (268 kg)





PROJECT \_\_\_\_\_

ITEM NO. \_\_\_\_\_

NOTES \_\_\_\_\_

MODEL NUMBER: **2 T**

**ELECTRICAL SYSTEM SINGLE PHASE**

Model	Electrical System *ground wire not included						Water & Drain	Capacity (per deck)	
	Volts	Phase	Amps	kW	Hz	Wires		13"x18"	18"x26"
2T1	208	1	32	6.5	50/60	2	1/2" (12)	4	2
	240	1	28						
2T2	208	1	64	13	50/60	2	1/2" (12)	4	2
	240	1	56						
2T3	208	1	96	19.5	50/60	2	1/2" (12)	4	2
	240	1	84						
2T4	208	1	128	26	50/60	2	1/2" (12)	4	2
	240	1	112						

**ELECTRICAL SYSTEM THREE PHASE**

Model	Electrical System *ground wire not included						Water & Drain	Capacity (per deck)	
	Volts	Phase	Amps	kW	Hz	Wires		13"x18"	18"x26"
2T1	208	3	18	6.5	50/60	3	1/2" (12)	4	2
	240	3	16						
	480	3	8						
2T2	208	3	36	13	50/60	3	1/2" (12)	4	2
	240	3	32						
	480	3	16						
2T3	208	3	54	19.5	50/60	3	1/2" (12)	4	2
	240	3	48						
	480	3	24						
2T4	208	3	72	26	50/60	3	1/2" (12)	4	2
	240	3	64						
	480	3	32						

