

QUEST ELITE 2000

2-FLAVORPOST-MIX
JUICE DISPENSER



FEATURES

Wide product/ratio capability – Handles a wide range of post-mix products including juices with pulp, teas and cold coffees

Frost-free refrigeration compartment – Safely accommodates frozen, ambient or aseptic concentrate containers or BIB's

Large 6-8lb ice bank – Provides cold drinks during peak demand


Patented mixing system – Delivers consistent quality drinks with no stratification, slugging or dripping

LED illuminated graphics – Eliminates lost sales due to 'lights out' and reduces life costs

Narrow footprint – Conserves counter space
Easy to service – Modular component design
and ease of access speeds service

'Sold out' indication – Alerts operator to product out condition and maximizes sales

Optional flush feature – Speeds maintenance and promotes product safety

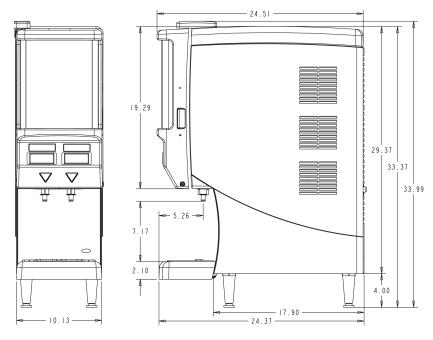

| PART NUMBER | DESCRIPTION |
|--------------|--|
| 721412101JU1 | Quest Elite 2 flavor, illuminated, flush, push button 115/60 |
| 721412111JU1 | Quest Elite 2 flavor, illuminated, flush, portion control 115/60 |
| 721402100JU1 | Quest Elite 2 flavor, non-illuminated, non-flush, push button 115/60 |
| 721412201JU1 | Quest Elite 2 flavor, illuminated, flush, push button 230/50 |
| 721412211JU1 | Quest Elite 2 flavor, illuminated, flush, portion control 230/50 |
| 729011004 | Extended Panel Kit for Pitchers/Carafes |
| 720500066 | Refillable Concentrate Reservoir (4) 3.5 L |
| 729011153 | Cup Locator |
| 729011126 | Bag-In-Box Option Kit |

TECHNICAL SPECIFICATIONS

| DESCRIPTION | 115 volts, 60 Hz 230 volts, 50 Hz | WATER SUPPLY REQUIREMENTS | 50 psi (3.4 bar) recommended dynamic |
|-----------------------|---|---------------------------|---|
| | Hermetically sealed system, R-134a refrigerant 6.2 oz (175 g) | OPERATING PRESSURE | 80 psi (5.15 bar): (148mL) @ 75°F (24°C) |
| ICE BANK | 6-8lb | | ambient, 75°F (24°C) |
| | High impact plastic cabinetry with stainless steel front panel | | incoming water, and 41°F (4°C) concentrate without exceeding a 40°F (4°C) |
| DISPENSER DIMENSIONS | 29.3"H x 15"W x 24.3"D (74.4 cm x 37.5 cm x 61.7 cm) | COOLING | |
| WEIGHT | Dry: 120 lb (54.4 kg) Operating: 185 lb (83.9 kg) | | (148 mL) @ 75°F (24°C) ambient, 75°F (24°C) incoming water, and |
| RECOMMENDED CLEARANCE | Back: 4" (10.16 cm) Top: 12" (34.8 cm) | | 41°F (4°C) concentrate w/o exceeding a 40°F (4°C) |
| | Sides: 1" (2.54 cm) | FLOW RATE | Adjustable water flow rate |
| WATER CONNECTION | , , | | from 1-2.2 oz/sec |
| | flare SAE fitting on dispenser | AGENCY LISTINGS | CUL) US NSF C F |
| CONCENTRATE STORAGE | 2 - 3.5 L bottles | | LISTED |



IN THE U.S.A. Ph: 800.238.3600 Fax: 800.258.0255 OUTSIDE THE U.S.A.
Ph: 763.488.8200
Email: webmaster@cornelius.com

101 Broadway Street West Osseo, MN 55369 www.cornelius.com