

D55AR

Top Mounted / 2-Solid Door





#### 1 TECHNICAL SPECIFICATIONS

Voltage/Frequency
Refrigerant
Type of Defrost
Interial Material
Exterior Material
Temperature Range °F
Compressor Power (HP)
Nema Config. NEMA5-15P

## PRODU

### **PRODUCT FEATURES**

- Equipped with Locking Doors
- The compressor is mounted in the top and placed in the coolest possible area; this makes it easily accessible for servicing.
- 图.B. Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
  - 7 Adjustable front locking casters.





Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey


1-800-931-8628


info@dukersusa.com

www.DukersUSA.com

# **DETAILS & SPECIFICATIONS**

#### D55AR

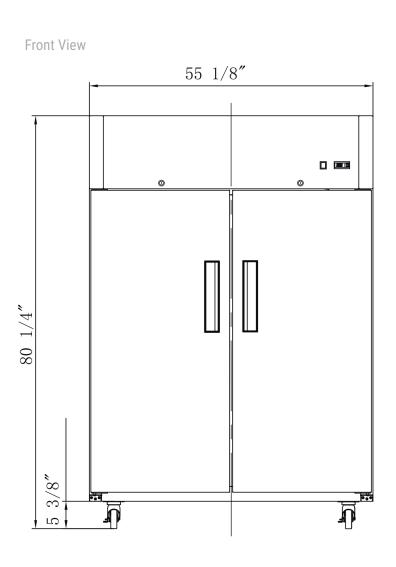

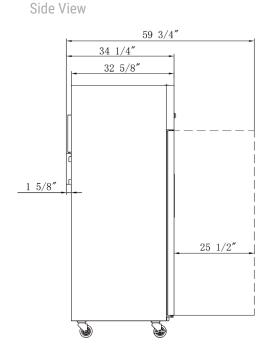

MUDEL D55AR		
Rated Voltage	115V	
Rated Frequency	60Hz	
Total Input Power	730W	
Total Current	8.6A	
Total Capacity	41.73 cu ft	
Climatic Category	4-5	
Protection Type	1	
Design Pressure High Side	300 PSIG	
Design Pressure Low Side	150 PSIG	
Insulation Blowing Gas	C-Pentane	
Refrigerant	R290/4.58 oz	

MODEL	EXTERNAL DIMENSION	PACKAGING DIMENSION	PRODUCT NET	# OF	40HQ
	WXDXH (INCHES)	WXDXH (INCHES)	WEIGHT	SHELVES	CONTAINER CERT.
D55AR	55 1/8 x 34 1/4 x 80 1/4	57 1/8 x 35 1/4 x 82 1/4	463 lbs	8	16















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

