



TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz Refrigerant R290

Type of Defrost Automatic

Interior Finish White

Exterior Finish Black

Temperature Range °F 33 ~ 40°F

Compressor Power (HP) 1/2-

Nema Config. NEMA5-15P


- Equipped with Locking Doors
- The compressor is mounted in the bottom for better heat evaporation.
- (B.B.) Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Interior and canopy LED light with switch on the right side to always show your products at their best
- High quality coated stainless adjustable shelves prevent peel and rust.
- Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.

HIGH QUALITY & ROBUST DESIGN

Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

DETAILS & SPECIFICATIONS

DSM-41R

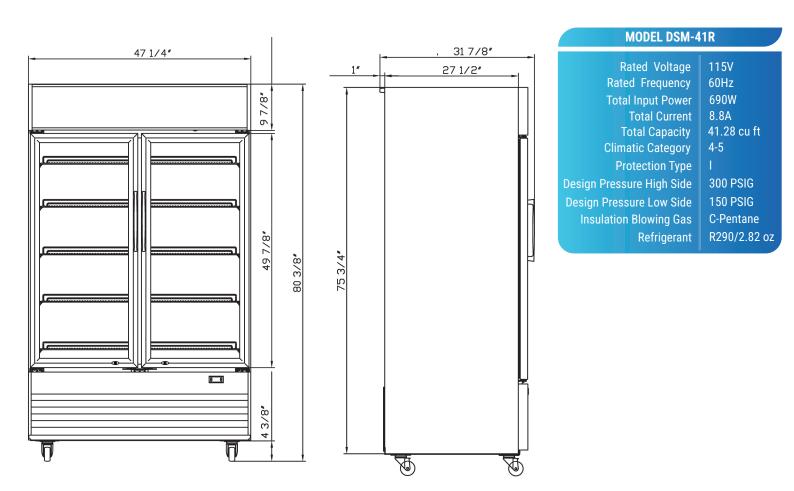

Front View

Side View

	MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
DSM-41R 47 1/4 x 31 7/8 x 80 3/8 49 1/4 x 32 7/8 x 82 3/8 363 lbs 5 23	DSM-41R	47 1/4 x 31 7/8 x 80 3/8	49 1/4 x 32 7/8 x 82 3/8	363 lbs	5	23



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628
info@dukersusa.com
w w w. D u kersUSA.com