

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Model #: \_\_\_\_\_

**MODEL: IRR – AGB45RI**

**REACH-IN:**  
**Top Mounted Reach-in Refrigerators – Roll-In.**



**General Strengths**

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Lighting.** Led lighting incorporated, reducing energy consumption between 80% and 90% respect to a traditional light bul.
- ✓ **Control systems.** Higher precision in managing temperature settings. The ability to adjust temperature ranges to meet end user’s requirements.
- ✓ **100% Tested.** All condenser units tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. EQA audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); ISO 45001:2018 (Prevention and Worker Safety)

Revision:01 Date: 13/10/2022 IRR-AGB45RI

MODELS	Dimensions (inches) (mm)			Doors	Ref.	Ref.Weight (Lbs.) (gr.)	Temperature Range (°F) (°C)	Cond. Unit (H.P)	Capacity (Cu.Ft.) (L)	Case Amps 115V	Net weight (Lbs.) (Kg.)
	W	D	H								
IRR-AGB45RI	37 (940)	42-5/16 (1075)	92-15/16 (2360)	1	R290	0,30 (140)	33 °F/38 °F (0°C/+4°C)	1/2	45.24 (1281)	6	510 (231)

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**INFRICO-North America Corporate División**  
 1409NW 84<sup>th</sup> Avenue, Doral FL 33126  
 (305) 777 9599 ext.700 / f (305) 777 9598  
 Toll Free 855-340-4637

[www.infrico.us](http://www.infrico.us)  
[sales@infrico.com](mailto:sales@infrico.com)  
[service@infrico.com](mailto:service@infrico.com)

**MODEL: IRR-AGB45RI**

**REACH-IN:**  
**Top Mounted Reach-in Refrigerators – Roll-In.**

**STANDARD FEATURES**

➤ **Exterior and interior**

- AISI 304 Stainless Steel,
- Built with removable panel for easy installation,
- Isolated lower side with 0,8" (20 mm) thick ramp included,

➤ **Door**

- Polyurethane insulated door,
- Self – closing door with stay open feature,
- Heavy – duty hinges,
- Triple chamber snap in door seals for easy removal and cleaning,
- Full-height door opening 27-5/8" x 72-7/8" (702x1851 mm)

**OPTIONAL FEATURES**

- ✓ Electrical connections is:  
 220 – 230 V / 1 ph / 50Hz (plug type varies).

➤ **Insulation**

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation 3-1/8" (80 mm) thick,
- Low GWP & Zero ODP effect.

➤ **Refrigeration**

- Digital temperature controller with automatic defrost system,
- Compact refrigeration system monoblock, INFRIBLOCK<sup>®</sup>,
- Energy-saving non-electric condensate pan,
- Evaporator coil coated with anti-corrosion
  - material 100% Polyester,
- Forced air refrigeration system,
- Refrigerant gas R290,
- Refrigeration capacity: 2661 Btu/h (14°F) / 780 W (-10°C).

➤ **Electrical**

- Cord and NEMA 5-15P plug,
- Electrical connection is 115V / 1ph / 60 Hz.
- 20 AMP breakers required,



ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE




Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Model #: \_\_\_\_\_

**MODEL: IRR-AGB45RI** **REACH-IN:**  
**Top Mounted Reach-in Refrigerators – Roll-In.**

**PLAN VIEW**

**ELEVATION                      RIGHT VIEW                      PLANT VIEW**

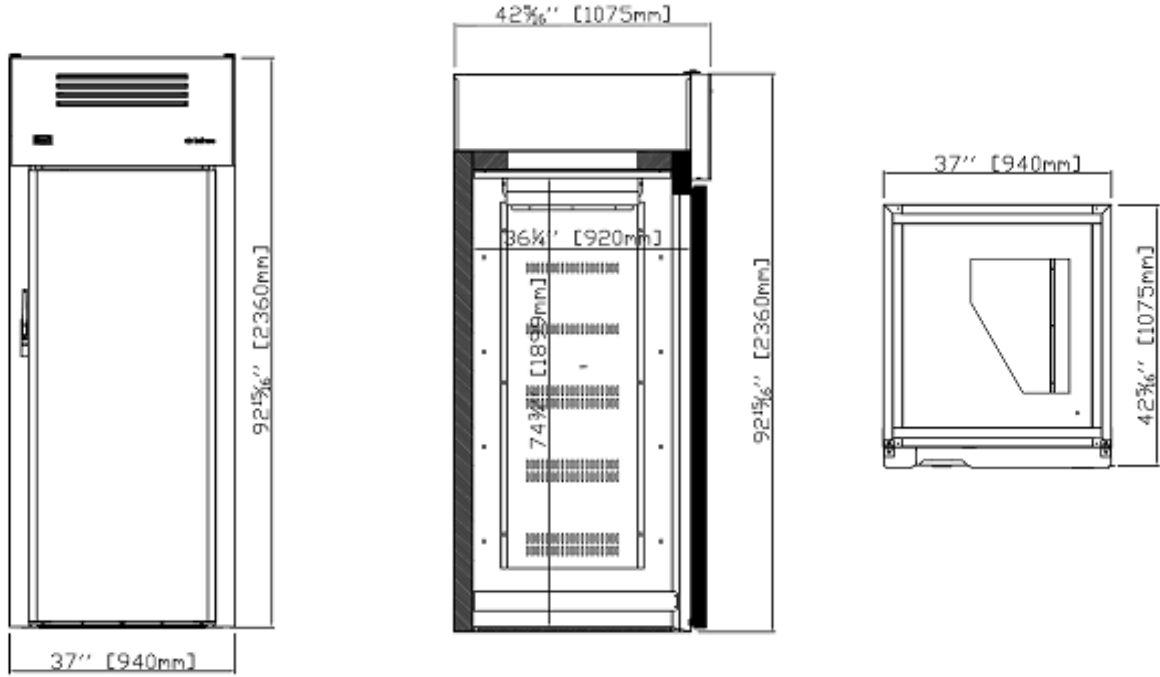

Revision: 01 Date: 13/10/2022 IRR-AGB45RI

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

**INFRICO-North America Corporate División**  
 1409NW 84<sup>th</sup> Avenue, Doral FL 33126  
 (305) 777 9599 ext.700 / f (305) 777 9598  
 Toll Free 855-340-4637

[www.infrico.us](http://www.infrico.us)  
[sales@infrico.com](mailto:sales@infrico.com)  
[service@infrico.com](mailto:service@infrico.com)

