

Salad & Sandwich Prep Tables



Stainless Steel is ideal for your kitchen environment for many reasons which include sanitation, hygiene and is the workhorse for your Restaurant. Asber APTS series Prep Tables features a **stainless-steel exterior front and sides** with an galvanized back. **Complete stainless-steel interior** for the most rugged construction while, easiest to clean with coved corner floors to meet **NSF standards**. Always one step above to ensure the highest standard in safety and sanitation for your establishment.

Insulation in any Refrigerator is one of the most important factors for thermal efficiency. Asber only uses the **world's leader Ecomate (GWP) (ODP) insulation, 2" thick** for the highest R value efficiency for your environments.

Our innovative air flow underneath the pans versus on top helps maintain products at their most optimal temperatures without drying the products. In addition, we have incorporated a bottom panel underneath the pans to prevent food spillage and force air into the lower compartment for complete air circulation throughout your unit.

With innovative and eco-friendly technology, Asber utilizes **R-290 Hydrocarbon** designed to meet DOE's Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).

ADDITIONAL FEATURES TO INCLUDE

- Hermetic compressors with epoxy coated evaporator.
- Automatic evaporator: paper fins not utilized in the evaporation process.
- Standard with 1/6 size and 1/9th size pans, 4" deep.
- Full length removable white Nylamid NSF, 10" cutting board.
- Refrigerators with electromechanical controller.
- Temperature: 32°F to 41°F based on an external environment of 90°F and 65% RH.
- Standard with 4" castors, front with brakes.
- Meets the NSF-7 standard for food safety.



APTS-36-10 HC

APTS-48-12 HC


APTS-72-20 HC

MODEL	DOORS	SHELVES	CAPACITY		VOLTS - FREQUENCY	POWER (HP)	AMPS	DIMENSIONS (in)			SHIPPING	
			Insertos	ft ³				Width	Depth	Height	Lbs.	ft ³
SALAD & SANDWICH PREP TABLES												
APTS-27-8 HC	1	1	8	6.9	115V. - 60 Hz.	1/10	1.5	28	30-1/8	46-1/8	187	31.8
APTS-36-10 HC	1	1	10	9.2	115V. - 60 Hz.	1/10	1.5	940	30-1/8	46-1/8	106	1.1
APTS-48-12 HC	2	2	12	13.3	115V. - 60 Hz.	1/4	2.5	48-7/8	30-1/8	46-1/8	280	53.0
APTS-60-16 HC	2	2	16	16.8	115V. - 60 Hz.	1/4	2.5	60-7/8	30-1/8	46-1/8	320	63.6
APTS-72-20 HC	3	3	20	20.6	115V. - 60 Hz.	1/4	2.5	72-7/8	30-1/8	46-1/8	370	74.2

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. | SPECIFICATIONS VALID ONLY FOR CONTINENTAL USA & CANADA.



Salad & Sandwich Prep Tables

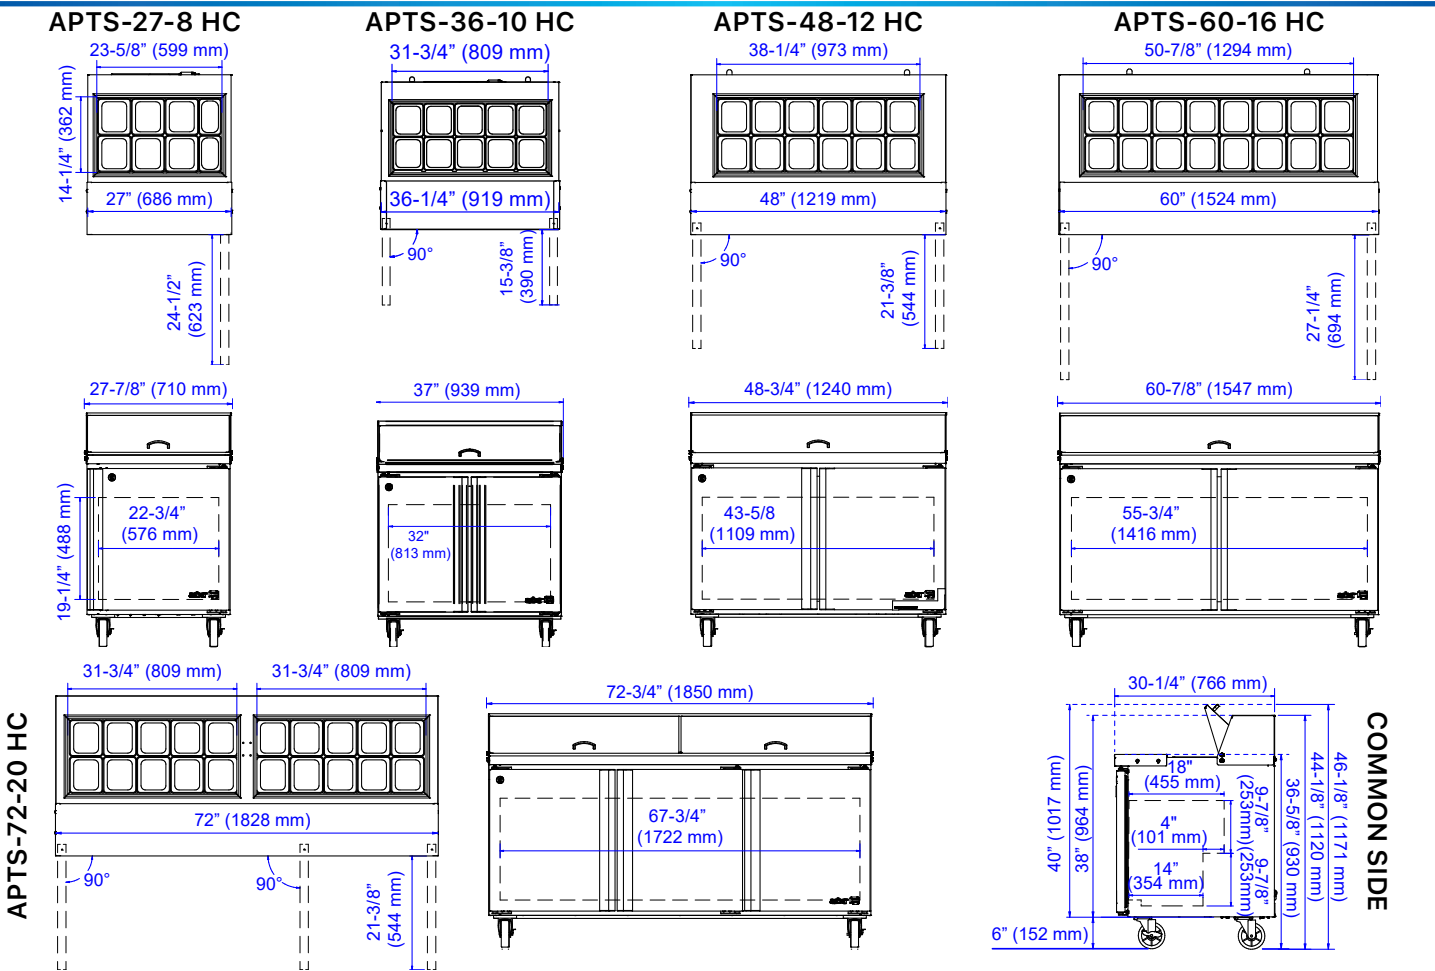

MODEL	APTS-27-8 HC	APTS-36-10 HC	APTS-48-12 HC	APTS-60-16 HC	APTS-72-20 HC
ELECTRICAL DATA					
Voltage/Frequency	115V. - 60 Hz.				
Power (HP)	1/10			1/4	
Amps.	1.5			2.5	
Plug Type	Nema 5-15P				
Chord Length (ft)	8.0				
Refrigerant	R290				
INTERIOR DIMENSIONS (IN)					
Width	22-5/8	32	43-5/8	55-3/4	67-3/4
Depth	17-7/8				
Height	19-7/8				
Shelves (Width x Depth)	22 x 14-5/8	15-7/8 x 15	20-1/2 x 14-5/8	26-5/8 x 14-5/8	22 x 14-5/8 20-1/2 x 14-5/8
SHIPPING DIMENSIONS (IN)					
Width	32-3/8	41-1/2	53-1/4	65-3/8	77-1/4
Depth	35				
Height	47-5/8				



INSTALLATION REQUIREMENTS

- ELECTRICAL CONNECTION:** Units pre-wired at factory with chord and NEMA 5-15P plug set included for 115/60/1 phase.
- REFRIGERANT:** R290 is classified as A3 flammable refrigerant; risk of fire or explosion due to puncture of refrigerant tubing; follow handling instructions carefully.
- RESIDENTIAL APPLICATIONS DISCLAIMER:** Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. | SPECIFICATIONS VALID ONLY FOR CONTINENTAL USA & CANADA.