

RC35


Remote Condensing System


Features

Provides high capacity refrigeration for frozen beverage dispensing. Either one or two dispensers may be connected to each refrigeration system. Maximum total length of refrigeration suction line is 150 feet (45.7 m).

Refrigeration System

One, approximately 12,500 btu/hr. compressor. R449A.
(BTUs may vary based on compressor used.)

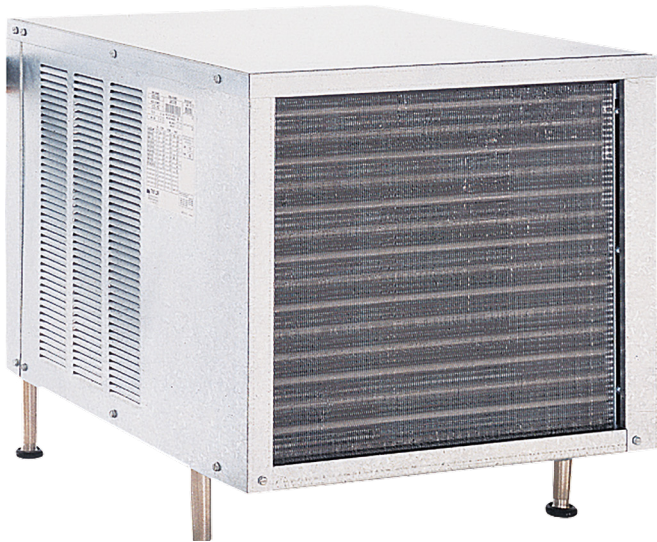

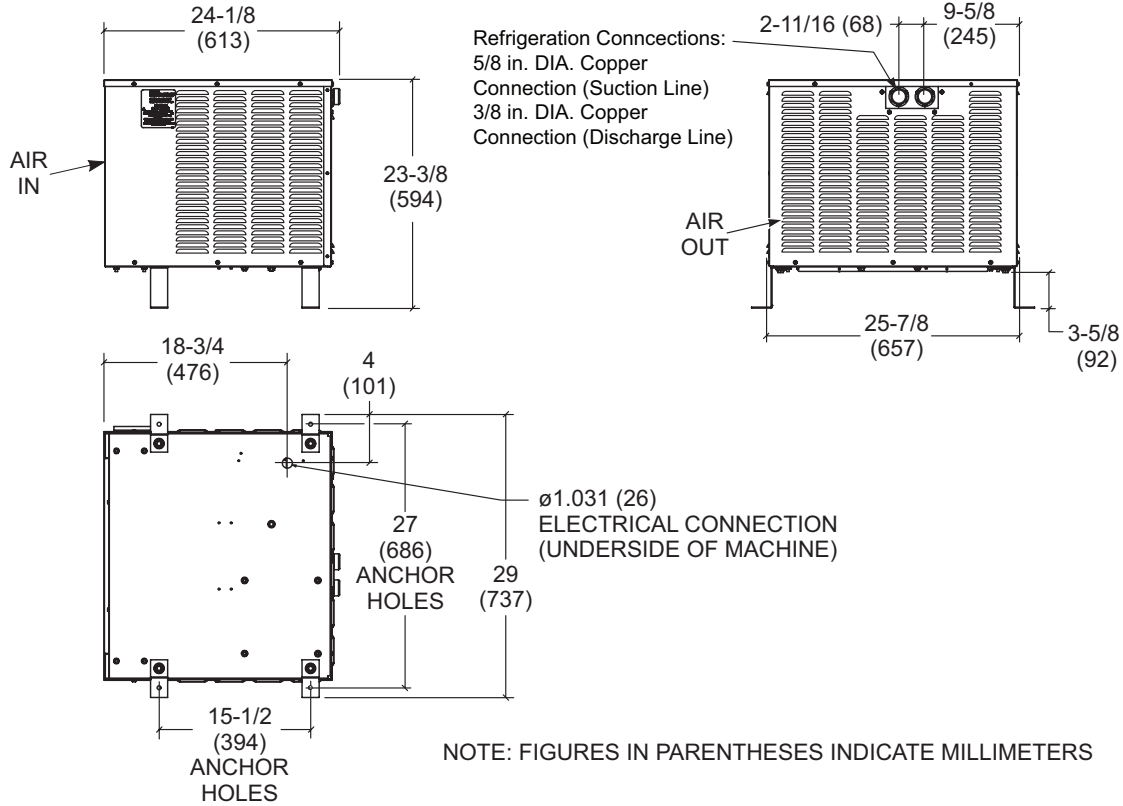

Weights	lb.	kg
Net	195.00	88.5
Crated	207.16	93.9

**For reference only*

	cu. ft.	cu. m
Volume	10.9	.31

Dimensions	in.	mm
Width	25-7/8	657
Depth	24-1/8	613
Height	23-3/8	594
Floor Clearance	3-5/8	92

Mounted on outdoor legs

Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)
208-230/60/3 Air	15	10	3P 4W
380-415/50/3n~ Air	7	5	4P 5W

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.
 (For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)

Continuing research results in steady improvements. Therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
 Neutral: Yes No Cooling: Air Water NA

Options: _____

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

Authorized Taylor Distributor

Specifications

Electrical

One dedicated connection required. Manufactured to be permanently connected. See the electrical chart for proper electrical specifications.

Refrigeration Connections

5/8 in. O.D. on suction (low-pressure) side and 3/8 in. O.D. on discharge (high-pressure) side. (Refrigeration lines are not provided.)

Air-Cooled

Minimum Clearance: 6 in. (152 mm) on 3 sides, with air deflector installed on the condenser side. Minimum air clearances must be met to ensure adequate airflow for optimum performance.

Options

- Outdoor use



750 N. Blackhawk Blvd.
 Rockton, Illinois 61072
www.taylor-company.com