



Undercounter Tables

UNDERCOUNTER REFRIGERATORS
UNDERCOUNTER FREEZERS

Stainless Steel is ideal for your kitchen environment for many reasons which include sanitation, hygiene and is the workhorse for your Restaurant. Asber AUTR (Refrigerators) and AUTF (Freezers) series Undercounters features a **stainless-steel exterior front and sides** with an galvanized back. **Complete stainless-steel interior** for the most rugged construction while, easiest to clean with coved corner floors to meet **NSF standards**. Always one step above to ensure the highest standard in safety and sanitation for your establishment.

Insulation in any Refrigerator is one of the most important factors for thermal efficiency. Asber only uses the **world's leader Ecomate (GWP) (ODP) insulation, 2" thick** for the highest R value efficiency for your environments.

With innovative and eco-friendly technology, Asber utilizes **R-290 Hydrocarbon** designed to meet DOE's Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).

ADDITIONAL FEATURES TO INCLUDE

Hermetic compressors with epoxy coated evaporator.

Automatic evaporator: paper fins not utilized in the evaporation process.

Refrigerators with electromechanical controller / Freezers with electronic controller with digital display

Temperature: Refrigerators 32°F to 41°F / Freezers -4°F to -8°F, based on an external environment of 90°F and 65% RH.

Standard with 4" castors, front with brakes.

Meets the NSF-7 standard for food safety.



AUTR-27 HC

AUTR-36 HC

AUTR-72 HC


MODEL	DOORS	SHELVES	CAPACITY (ft ³)	VOLTS - FREQUENCY	POWER (HP)	AMPS	DIMENSIONS (in)			SHIPPING	
							Width	Depth	Height	Lbs.	ft ³
UNDERCOUNTER REFRIGERATORS											
AUTR-27 HC	1	1	6.9	115V. - 60 Hz.	1/10	1.5	28	30-1/8	36-1/8	179	24.7
AUTR-36 HC	1	1	9.2	115V. - 60 Hz.	1/10	1.5	940	30-1/8	36-1/8	100	0.9
AUTR-48 HC	2	2	13.3	115V. - 60 Hz.	1/4	2.5	48-7/8	30-1/8	36-1/8	260	42.4
AUTR-60 HC	2	2	16.8	115V. - 60 Hz.	1/4	2.5	60-7/8	30-1/8	36-1/8	302	49.4
AUTR-72 HC	3	3	20.6	115V. - 60 Hz.	1/4	2.5	72-7/8	30-1/8	36-1/8	342	60.0
UNDERCOUNTER FREEZERS											
AUTF-27 HC	1	1	6.9	115V. - 60 Hz.	1/3	2.7	28	30-1/8	36-1/8	179	24.7
AUTF-48 HC	2	2	13.3	115V. - 60 Hz.	1/2	6.5	48-7/8	30-1/8	36-1/8	260	42.4
AUTF-60 HC	2	2	16.8	115V. - 60 Hz.	1/2	6.5	60-7/8	30-1/8	36-1/8	302	49.4

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. | SPECIFICATIONS VALID ONLY FOR CONTINENTAL USA & CANADA.



Undercounter Tables

UNDERCOUNTER REFRIGERATORS
UNDERCOUNTER FREEZERS

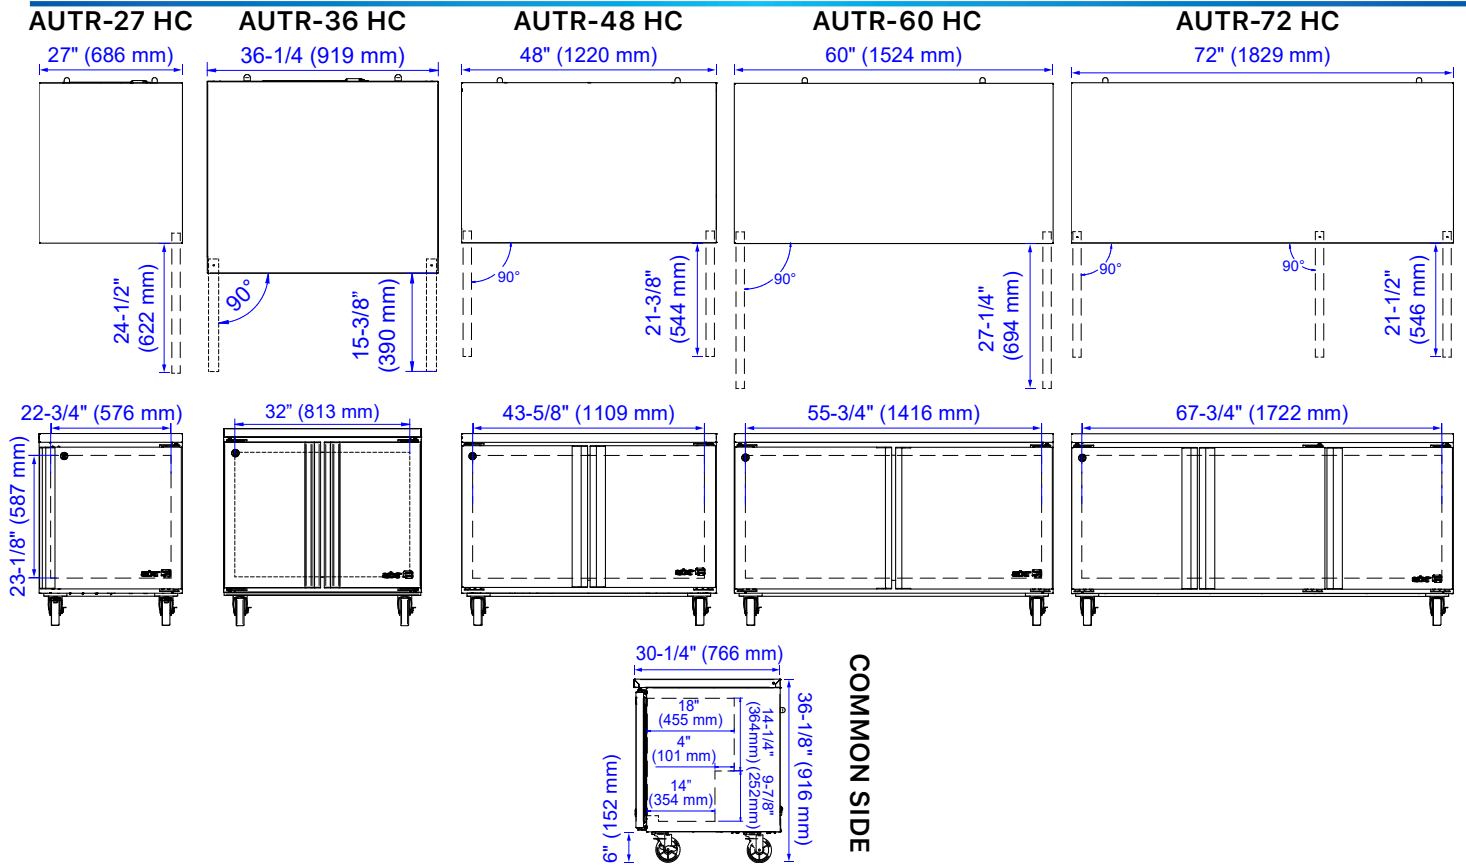

MODEL	27"		36"		48"		60"		72"
	AUTR	AUTF	AUTR	AUTF	AUTR	AUTF	AUTR	AUTF	AUTR
ELECTRICAL DATA									
Voltage/Frequency	115V. - 60 Hz. ó 115V. - 60 Hz.								
Power (HP)	1/10	1/3	1/10	1/4	1/2	1/4	1/2	1/4	1/4
Amps.	1.5	2.7	1.5	2.5	6.5	2.5	6.5	2.5	2.5
Plug Type	Nema 5-15P								
Chord Length (ft)	8.0								
Refrigerant	R290								
INTERIOR DIMENSIONS (IN)									
Width	22-5/8		32		43-5/8		55-3/4		67-3/4
Depth	17-7/8								
Height	24-1/4								
Shelves (Width x Depth)	22 x 14-5/8		15-7/8 x 15		20-1/2 x 14-5/8		26-5/8 x 14-5/8		22 x 14-5/8 20-1/2 x 14-5/8
SHIPPING DIMENSIONS (IN)									
Width	32-3/8		41-1/2		53-1/4		65-3/8		77-1/4
Depth	35								
Height	37-5/8								



INSTALLATION REQUIREMENTS

- ELECTRICAL CONNECTION:** Units pre-wired at factory with chord and NEMA 5-15P plug set included for 115/60/1 phase.
- REFRIGERANT:** R290 is classified as A3 flammable refrigerant; risk of fire or explosion due to puncture of refrigerant tubing; follow handling instructions carefully.
- RESIDENTIAL APPLICATIONS DISCLAIMER:** Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. | SPECIFICATIONS VALID ONLY FOR CONTINENTAL USA & CANADA.