



GAS

OPEN BURNERS | HOT PLATES 19 1/4"

IMPERIAL



IHPA-3-36

Model Numbers

- IHPA-1-12
- IHPA-2-24
- IHPA-3-36
- IHPA-4-48



LARGE 5" (127 MM) STAINLESS STEEL LANDING LEDGE FOR CONVENIENT PLATING.

OPEN BURNERS

- PyroCentric™ 32,000 BTU (9 KW) anti-clogging burner with a 7,000 BTU/hr. (2 KW) low simmer feature. Two rings of flame for even heating.
- Cast iron PyroCentric burners are standard on all IHPA hot plates.
- Burners are anti-clogging and lift-off and separate for easy cleaning.
- No gaskets or screws.
- One standing pilot per burner for instant ignition.

GRATES

- Top grates feature 2 sections for easy and safe to lift-off for cleaning.
- Grates have a cast-in bowl that directs heat upward.
- Anti-clogging pilot is designed into the grate to shield the pilots from grease and debris.
- Pots slide easily from section to section and onto landing ledge.
- Grates are cast iron for a long service life.




EXTERIOR FEATURES

- Stainless steel front, sides and landing ledge for cleanability and professional look.
- Welded and polished stainless steel seams.
- Range Match profile when placed on a refrigerated base or equipment stand.
- Stainless steel landing ledge is ideal for plating.
- Control knobs are durable die cast metal for long life.
- Full width, removable crumb tray for easy cleaning.
- 4" (102 mm) heavy duty legs with adjustable feet.
- One year parts and labor warranty.




GAS

OPEN BURNERS | HOT PLATES - 19 1/4"

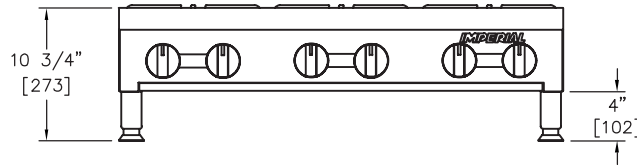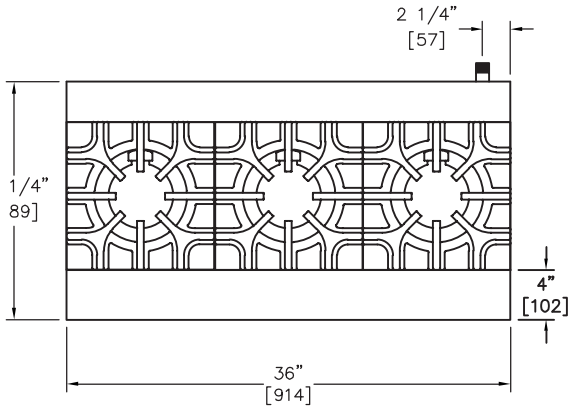

GAS HOT PLATES - 19 1/4" (489 MM) DEPTH



WIDTH	MODEL	OPEN BURNERS	GAS OUTPUT		SHIP WEIGHT	
			BTU	KW	KG	LBS
12" (305 MM)	IHPA-1-12	1	32,000	9	21	45
24" (610 MM)	IHPA-2-24	2	64,000	19	37	80
36" (914 MM)	IHPA-3-36	3	96,000	28	53	115
48" (1219 MM)	IHPA-4-48	4	128,000	38	64	140

OPTIONS AND ACCESSORIES

- Stainless steel equipment stands
- 6" (152 mm) casters for equipment stands
- 10" (254 mm) stainless steel wok ring
- Saute burner head, interchangeable
- Wok burner head, interchangeable
- Stainless steel wok ring
- Gas shut off valve 3/4" N.P.T
- Quick disconnect and flexible gas hose 3/4" N.P.T

CLEARANCE REQUIREMENTS

Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.

MODEL	DIMENSIONS	CRATED DIMENSIONS
IHPA-1-12	12" W X 19-1/4" D X 10-3/4" H (305 X 489 X 273 MM)	14-1/2" W X 22" D X 12" H (368 X 559 X 305 MM)
IHPA-2-24	24" W X 19-1/4" D X 10-3/4" H (305 X 489 X 273 MM)	26-1/2" W X 22" D X 12" H (3673 X 559 X 305 MM)
IHPA-3-36	36" W X 19-1/4" D X 10-3/4" H (914 X 489 X 273 MM)	38-1/2" W X 22" D X 12" H (978 X 559 X 305 MM)
IHPA-4-48	48" W X 19-1/4" D X 10-3/4" H (1219 X 489 X 273 MM)	50-1/2" W X 22" D X 12" H (1283 X 559 X 305 MM)

MANIFOLD PRESSURE		
NATURAL GAS	PROPANE GAS	MANIFOLD SIZE
5.0" W.C.	10.0" W.C.	3/4" (19 MM)



Notes: Models IHPA-2-12, IHPA-4-24, IHPA-6-36, IHPA-8-48 have a double row of open burners and measure 31-3/8" d (797 mm)