

# **Product Specifications**

# 25 cu ft Refrigerator, Reach-In

- Improve the flow and function of your space by having refrigerated items where you need them most
- Comfortably fits 18" x 26" sheet pans (not included)
- 4 casters included (2 locking) for easy mobility



UCRE427-SS01A

Model	Description	Voltage/Hz/Amps	Shipping Weight
UCRE427-SS01A	25 cu ft Refrigerator, Reach-In, Field Reversible Hinge	115v / 60hz / 3.8	287 lb


Specifications	
UCRE427-SS01A dimensions: 80 <sup>23</sup> / <sub>32</sub> " H x 27 <sup>9</sup> / <sub>16</sub> " W x 31 <sup>1</sup> / <sub>2</sub> " D	
AISI 441 stainless steel interior and exterior with lock	
Autodefrost	
CFC-free high-density polyurethane insulated cabinet	
Environmentally friendly R290 refrigerant: 3.2 oz (0.090kg)	
Electronic digital temperature control with alarms	
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P	
High efficiency compressor, top mount	
High efficiency evaporator coil & condenser	
NSF/ANSI Standard 7 compliant	
Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design	
Temperature range: 28°F to 46°F	
Volume of 25 cu ft	
1 section, includes 3 epoxy coated wire shelves	

Accessories	Description	Shipping Weight
ULA4080584	(1) Stainless steel shelf guide for all reach-ins except UCRE553 & UCFZ553, 24 3/4"	.88 lb
ULAQ32-0002	(1) Epoxy coated wire shelf, 20 7/8" x 25 5/8" for reach-ins	7 lb
ULA89020410	Stainless steel adjustable leg kit includes 4 legs, 4 5/8" H to 7 1/8" H, M6 bolts	11.02 lb
ULA80110300	Interior LED lighting kit for solid door reach-ins	2.2 lb




## **Product Specifications • 25 cu ft Refrigerator, Reach-In**


#### Front (Open)

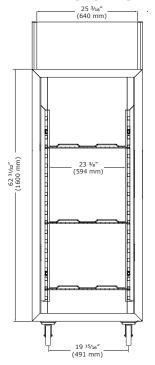


### Top



#### Front (Closed)

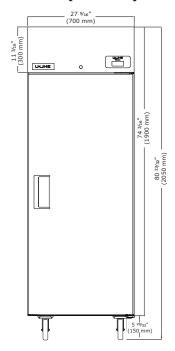

#### Side

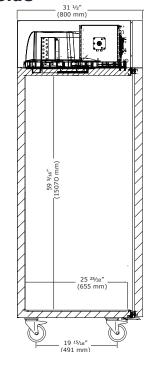

#### **Commercial Warranty**

3 Year (parts & labor) / 5 year sealed system (parts) See complete warranty for details



