

CHANNEL SLIDE DOUBLE TRAY RACK MODEL 2213-1824B

FEATURES AND BENEFITS:

- Versatile double tray rack for transporting meal trays and bussing afterwards. Rack holds 14" x 18" trapezoid trays as well as 13" x 18", 14" x 18", and 18" x 26" standard pans.
- Racks can be enclosed on sides and back for use as an attractive tray return cart.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Special "sure-hold" extrusions, riveted in place on 5-1/8" centers, securely hold tray's top and bottom; will not tip even when pulled half way out.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.




2213-1824B





ACCESSORIES and OPTIONS (Available at extra cost):

- Top Enclosure
- Side Enclosure
- Back Enclosure
- Bottom Enclosure
- Pan Stops
- Push Handle
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumpers
- Rotary Bumpers (for use with 5" casters)
- Floor Lock (for use with 5" casters)
- Various Caster Options

See page G-36 for accessory details.

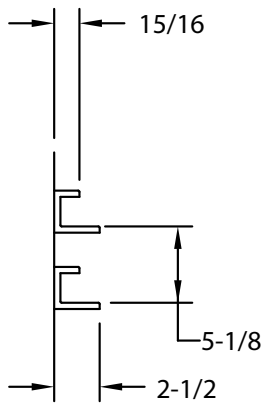

DETAIL OF PAN SLIDE

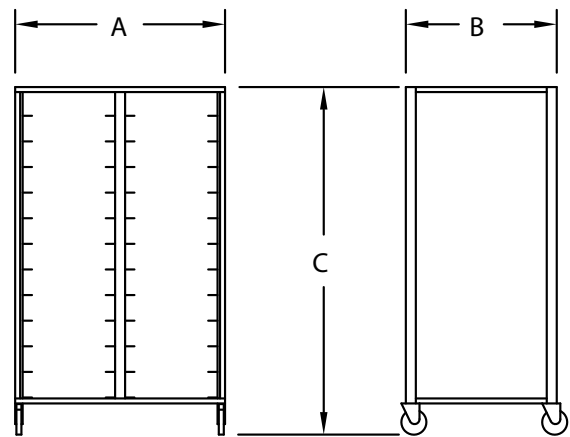

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	*WIDTH	DEPTH	HEIGHT		
2213-1824B	48	13 x 18	IN	42-3/16	30-1/4	69-9/16	18-3/4"	29-1/2	61-3/8	LBS	122
		330 x 460	MM	1075	770	1770	480	750	1560	KG	53
	48	14 x 18	IN								
		360 x 460	MM								
	24	18 x 26	IN								
		460 x 660	MM								
	48	Trapezoid 14 x 18	IN								
		360 x 460	MM								

- Notes: 1. *Inside width dimension for each compartment.
 2. When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

RACK:

- Posts: Closed post extrusions, 1-1/16 x 2.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Casters: 5" dia., swivel, neoprene tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

PAN SLIDES:

- Extruded channels, 15/16 x 1-7/16 x 2-1/2 x .100; riveted to posts on 5-1/8" centers.

SHORT FORM SPECIFICATIONS

Cres Cor Double Tray Tray Rack Model 2213-1824B. Extruded aluminum welded construction with no-tip "C" type channel slides riveted on 5-1/8" centers. Capacity (48) 14" x 18" trapezoid or (24) 18" x 26" pans. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: _____ . NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833
 Phone: 877/CRESCOR • Fax: 440/350-7267
 www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.