



RC35 - 60Hz

Remote Condensing System

Features


Provides refrigeration for frozen dessert dispensing. Maximum total length of refrigeration line set is 150 feet (45.7 m).

Refrigeration System

One, approximately 15,000 btu/hr. compressor. R449A. (BTU s may vary based on compressor used.)





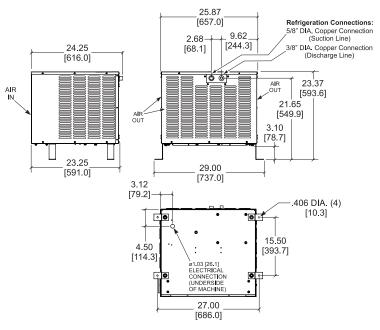

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH [1.5mm]).

Weights	lb.	kg		
Net	195.0	61.2		
Crated	205.0 78.4			
*For reference only				
	cu. ft.	cu. m		
Volume	12.7	.360		
Dimensions	in.	mm		
Width	25-7/8	657		
Depth	23-1/4	591		
Height	23-3/8	594		
Floor Clearance	3-3/32	79		

Mounted	on	outa	oor .	legs
---------	----	------	-------	------

Electrical	Maximum	Minimum	Poles (P)	
	Fuse Size	Circuit Ampacity	Wires (W)	
208-230/60/3 Air	15	10	3P 4W	

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.

(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)

Continuing research results in steady improvements. Therefore, these specifications are subject to change without notice.

Bidding Specs						
Electrical: Volt		Hz_	ph			
Neutral	□Yes	□No	Cooling:	□Air	□Water	□NA
Ontions.						

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

Specifications

Electrical

One dedicated connection required. Manufactured to be permanently connected. See the electrical chart for proper electrical specifications.

Refrigeration Connections

5/8 in. O.D. on suction (low-pressure) side. 3/8 in. O.D. on discharge (high-pressure) side. (Refrigeration lines are not provided.)

Air-Cooled

RC35: Each 60 Hz remote condenser requires a minimum air clearance of 6 in. (152 mm) on three sides.

An air deflector must be installed on the condenser side of each RC35 if the floor clearance is less than 5 in. (127 mm).

(Note: The legs are typically mounted on 4 in. x 4 in. lumber to achieve the minimum floor clearance.)

Options

· Outdoor use