

DESIGNER LINE WARMER

Model: DL1WE-HD



1-Section Extra-Wide Reach-In Warmer with Half Doors

DL1WE-HD - Stainless steel front, aluminum end panels and interior
DL1WE-SA-HD - Stainless steel exterior, aluminum interior
DL1WE-SS-HD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

| | |
|--|--|
| Stainless steel case back | Special electrical req. (consult factory) |
| Additional chrome plated steel shelves | Rehinging of doors (consult factory) |
| Stainless steel shelves | Correctional Facility Options |
| Universal pan slides | <ul style="list-style-type: none"> One way security screws |
| Gcasters | <ul style="list-style-type: none"> Locking hasp (lock not included) |
| Custom laminates | <ul style="list-style-type: none"> Stainless steel mesh cover Coverless hinges |

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

HEATING SYSTEM

Self contained, performance rated heating system
 90°F to 180°F temperature range
 Top mounted heating plenum "plug" with circulating fan
 Unique air flow distribution ducts

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
 Smooth, polished chrome workflow door handles
 Cam action, lift off hinges
 Self-closing doors
 Magnetic snap in Santoprene™ door gaskets
 Cylinder lock in each door
 Heavy duty, chrome plated steel shelves
 Heavy duty pilaster strips
 Adjustable 6" stainless steel legs

MODEL FEATURES

Automatic interior lighting
 Electronic controller with digital display & hi-low alarm
 Stainless steel strip heaters located in base of interior

APPROVAL:



Model Specifications

DIMENSIONAL DATA

| | |
|---|------------------|
| Net Capacity (cubic feet) | 22 (623 cu l) |
| Width, Overall (inches) | 28 1/2 (724 mm) |
| Depth, Overall (inches) (including handles) | 35 3/8 (899 mm) |
| Depth (inches) (less doors) | 32 (813 mm) |
| Depth (inches) (doors open 90°) | 58 (1473 mm) |
| Clear Door Width (inches) | 21 7/8 (556 mm) |
| Clear Half Door Height (inches) | 27 1/2 (699 mm) |
| Height, Overall (inches) (including 6" legs) | 83 1/4 (2115 mm) |
| Number of Doors | 2 |
| Number of Shelves | 3 |
| Shelf Area (square feet) | 22.2 (2.1 sq m) |
| Tray Slide Capacity (top section) | 9 |
| Tray Slide Capacity (bottom section) | 6 |

ELECTRICAL DATA



| | |
|----------------------------------|--------------|
| Voltage | 208-230/60/1 |
| Feed Wires (including ground) | 3 |
| Total Amps (International) | 7.2 (7.2) |
| Total Wattage @ 208-230 volts | 1500 |
| 10 ft. Cord/Plug (International) | No (No) |

SHIPPING DATA

| | |
|------------------------------|------------------|
| Height - Crated (inches) | 85 1/2 (2172 mm) |
| Width - Crated (inches) | 31 5/8 (803 mm) |
| Depth - Crated (inches) | 42 (1067 mm) |
| Volume - Crated (cubic feet) | 65 (1841 cu l) |
| Weight Std - Crated (pounds) | 290 (132 kg) |
| Weight SS - Crated (pounds) | 305 (138 kg) |

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

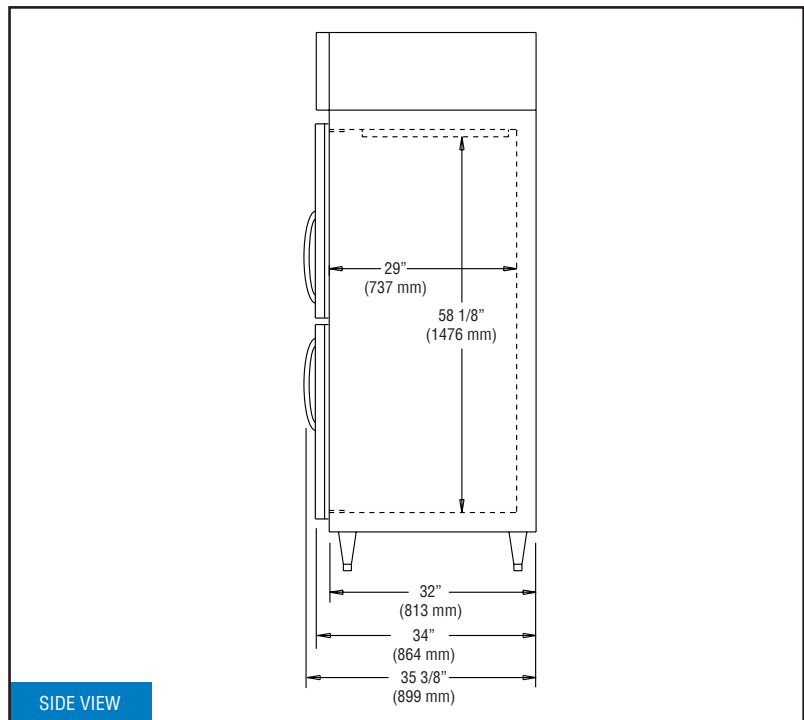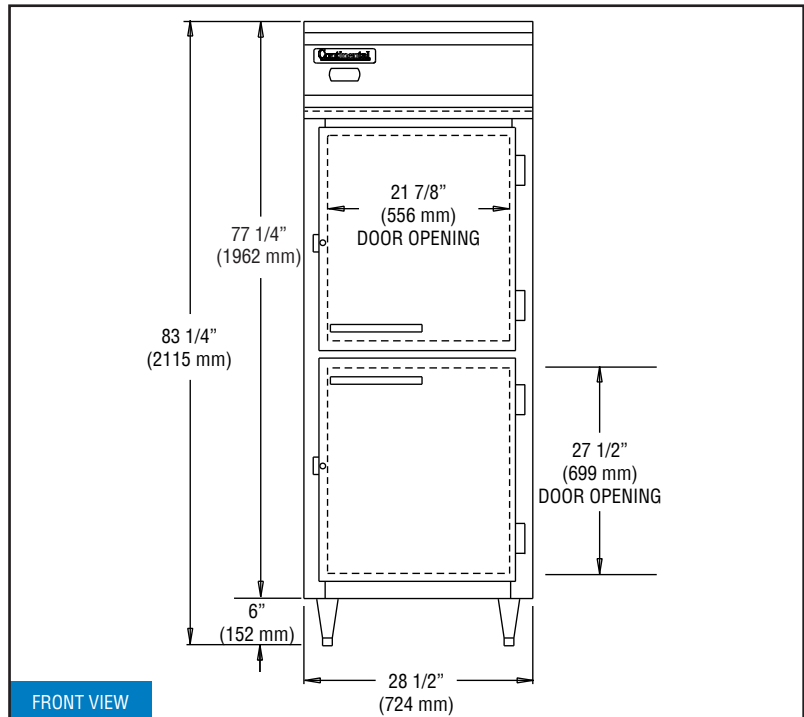

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY
DESIGNED & ASSEMBLED
IN THE U.S.A.

Intertek

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 4/29/2024