



Job: _____ Item No. _____

Notes:

Model Number: PH1200 PH1215
 PH1225 PH1250

Heated Transport Carts

SPECIFICATIONS



PH1250

DESCRIPTION

PH Series heated food transport carts are designed to hold and transport cooked food warm and ready for serving. They are constructed of sanitary stainless steel and feature a bottom-mounted, lift-out heating system with dial controls and blower heat for even air flow throughout the cart. Transport features include wrap-around bumper, wheel-ahead caster pattern and insulated turned-in seam construction

SHORT FORM SPECIFICATIONS

Heated food transport cart, electric. Insulated and welded, with turned-in seam, stainless steel construction, side-mounted push handles and flush-mounter transport latch with finger grip. Lift-out, convection heater. Stainless steel tray racks with channel pan slides at 2.75" spacing. Accommodates 12"x20" pans. Non-marking, gray vinyl wrap-around bumper. Polyurethane casters set in wheel-ahead caster pattern. PH1200: 120V, 1530 watts, 12.8A, 60Hz, 1Ph. PH1215, PH1225, PH1250: 120V, 1650 watts, 13.7A, 60Hz, 1Ph. Ten foot 3 wire rubber cord with 3-prong grounding plug. NEMA 5-15P.

WARRANTY

One year warranty for parts and labor.

FEATURES

- Removable, bottom mounted heating system with blower heat and full range thermostat control knob
- Dial thermometer with remote sensing bulb
- Max. temperature: 200°F (93°C); pre-heat to 160°F (71°C) in approx. 25 minutes
- All-welded, turned-in seam, double-wall, stainless steel construction
- 14 ga. stainless steel caster bolsters; 1"x1"x14 ga. perimeter tube supports welded to bolsters
- Two heavy-duty aluminum push handles bolted to sides with reinforced back-up plates
- Double panel, insulated door with vinyl gasket
- Concealed, stainless steel pin hinges; 270° door swing (except center door on PH1250)
- Sliding latch with finger grip
- Heavy-duty vinyl door gasket
- Offset, wheel-ahead caster pattern
- Non-marking gray vinyl bumper set in heavy-duty extruded aluminum frame
- Removable tray racks with channel slides at 2.75" spacing
- Accommodates 12"x20" steam table pans,

OPTIONS AND ACCESSORIES

- Menu card holder
- Stainless steel tubular handles
- Polycarbonate thermometer cover
- Transport latch with padlock hasp
- Locking door latch with key
- Rack hold down device
- Heater hold down device
- Tamper-resistant fasteners
- Removable canned fuel holder
- Filler plate
- Lift-up pull handle (n/a: PH1200)
- Alternate electrical configuration
- Alternate caster sizes
- Correctional package

CERTIFICATIONS



CARTER-HOFFMANN

1551 McCormick Ave., Mundelein, IL 60060

847.362.5500 800.323.9793

www.carter-hoffmann.com

Follow Us



Form PH1200Series
Series 0331





Job: _____ Item No. _____

Notes:

Model Number: PH1200 PH1215
 PH1225 PH1250




Heated Transport Carts

SPECIFICATIONS

Front

Side

Top

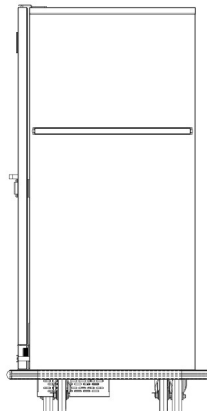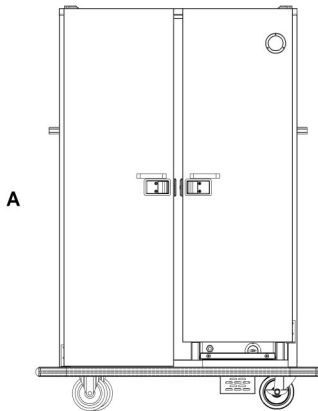

CLEARANCES


A clearance of at least 2" from any wall or combustible material. A clearance of at least 36" at the front of the cabinet is required to open the door.

ELECTRICAL DATA

Single electrical connection: 120 volts, single phase. Ten foot, three wire rubber cord with 3-prong grounding plug. NEMA 5-15P.

PH1200: 1530 watts, 12.8A

PH1215, PH1225 & PH1250: 1650 watts, 13.7A



Model Number	Pan Capacity 12"x20" x 2.5"	Number of Doors	Inside Working Height		Height [A]		Depth [B]		Width [C]		Caster Diameter		Shipping Weight	
			in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
PH1200	16	1	46	1168	58	1473	29 ¹ / ₂	743	23 ⁷ / ₈	606	5	127	280	127
PH1215	21	2	30	762	42	1067	29 ¹ / ₂	743	41	1041	5	127	325	147
PH1225	33	2	46	1168	58	1473	29 ¹ / ₂	743	41	1041	5	127	350	159
PH1250	50	3	46	1168	58	1473	29 ¹ / ₂	743	56 ⁵ / ₈	1438	5	127	450	204

*Pan spacing at 2.75" (70mm).

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Carter-Hoffmann exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.

CARTER-HOFFMANN

1551 McCormick Ave., Mundelein, IL 60060

Phone 800.323.9793 • Fax 847.367.8981

www.carter-hoffmann.com

Printed in the USA • PH1200 Series • Rev. B • 03.23

Specifications are subject to change without notice and are not intended for installation purposes.