



BEVERAGE-AIR

| | |
|-----------------|------|
| Project: _____ | AIA# |
| Item: _____ | SIS# |
| Location: _____ | |
| Approved: _____ | |

CDR4HC DELI/BAKERY CASE REFRIGERATOR

DELI/BAKERY CASE

CDR4HC Deli/Bakery Case Refrigerator
Hydrocarbon Series

MODEL:
CDR4HC-1-B



3 Year Parts/Labor Warranty
5 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior has black powder coated galvanized steel
- Stainless steel interior with mirrored end caps
- Sliding glass, removable doors
- Curved front glass
- Full electronic control with various set points
- LED lighting with on and off switch
- Electrical outlet for scale
- Adjustable shelves for better product display
- Price tag molding standard
- Open food rated

OPTIONS & ACCESSORIES

- Dry case (add -D to refrigerated models)
- 3" Casters
- 6" Casters
- 2-3/4" Casters

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Hot gas condensate evaporator
- Hot gas defrost system
- Maintenance free condenser
- Refrigerator maintains product temperatures between 33°F to 41°F
- Direct sunlight should be avoided
- Tested to 75°F and 55% relative humidity



Please verify qualifying units by visiting:
www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com



BEVERAGE-AIR

Deli/Bakery Case Refrigerator


Model: CDR4HC-1-B

| MODEL | CDR4HC-1-B |
|--|-------------------|
| EXTERNAL DIMENSIONAL DATA | |
| Width Overall | 49 1/4" |
| Depth Overall | 35 47/64" |
| Height Overall | 48 9/16" |
| INTERNAL DIMENSIONAL DATA | |
| NET Capacity (cubic ft.) | 14 |
| Internal Width Overall (in) | 45 7/16" |
| Internal Depth Top & Middle Overall (in) | 15 11/100" |
| Internal Depth Overall Bottom (in) | 24 37/100" |
| Internal Height Overall (in) | 38 43/64" |
| Number of Shelves | 2 |
| ELECTRICAL DATA | |
| Full Load Amperes | 4.0 |
| REFRIGERATION DATA | |
| Horsepower | 1/6 |
| Energy Consumption | 5.63 kw-hr/24 hrs |
| Capacity (BTU/Hr) | 1180 |
| Heat Rejection (BTU/Hr) | 1770 |
| Charge (lbs/grams) | 0.176/80 |
| SHIPPING DATA | |
| Gross Weight | 514 lbs |
| Height - Crated | 58" |
| Width - Crated | 55" |
| Depth - Crated | 39" |


We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Model Views


Required Clearance: Do not block grille (3" rear)

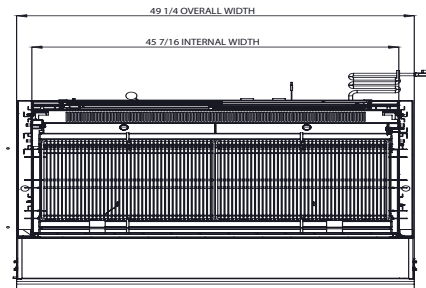

PLAN VIEW



ELEVATION VIEW

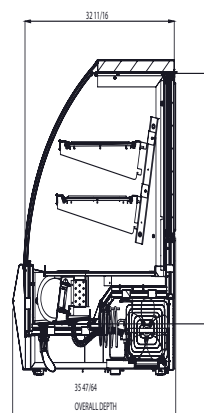

SIDE VIEW

ELECTRICAL CONNECTION



120/60/1
NEMA 5-15P

Units pre-wired at factory and include 8' long cord and plug set.

