



REACH IN FREEZER

D₂₈F

Bottom Mounted / Solid Door





1 TECHNICAL SPECIFICATIONS

Voltage/Frequency
Refrigerant



PRODUCT FEATURES

- Equipped with Locking Doors
- Reversible Doors
- The compressor is mounted in the bottom for better heat evaporation.
- B.B. Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.





Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628


info@dukersusa.com

www.DukersUSA.com


DETAILS & SPECIFICATIONS

D₂₈F

Front View

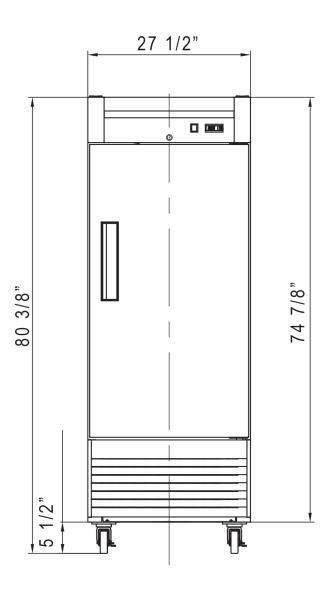

Side View

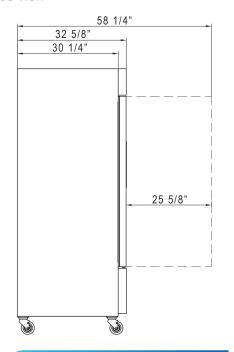

MUDEL D281	
Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	750W
Total Current	9.5A
Total Capacity	17.79 cu ft
Climatic Category	4-5
Protection Type	1
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/4.41 oz
Herrigerant	11270, 1.11 02

MODEL	EXTERNAL DIMENSION	PACKAGING DIMENSION	PRODUCT NET	# OF	40HQ
	WXDXH (INCHES)	WXDXH (INCHES)	WEIGHT	SHELVES	CONTAINER CERT.
D28F	27 1/2 x 32 5/8 x 80 3/8	29 1/8 x 34 5/8 x 82 3/8	287 lbs	4	39















