



# BEVERAGE-AIR

|                 |      |
|-----------------|------|
| Project: _____  | AIA# |
| Item: _____     |      |
| Location: _____ | SIS# |
| Approved: _____ |      |

# PH2 P SERIES WARMING CABINET

## P SERIES TOP MOUNT WARMING CABINET

### PH2 Solid Door Warming Cabinet

**MODEL:**  
PH2-1S-PT



**7 Year Parts/Labor Warranty**

### CABINET CONSTRUCTION

- Stainless steel exterior
- Interior liner is made of corrosion resistant aluminum
- Operational indicator panel contains thermometer and adjustable thermostat control which is accurately calibrated from 80°F to 180°F
- Manually controlled humidity vents are provided in the top of the cabinet
- Self closing doors with safety stops
- Heavy-duty cylinder lock and self-adjusting magnetic gasket
- Stainless steel breaker caps
- Cam-lift hinges
- Six (6) silver freeze shelves
- 6" Adjustable legs standard
- 8' Cord and plug (see electrical data for details)

### OPTIONS & ACCESSORIES

- Pan slides
- Stainless steel interior
- 3" or 6" Casters
- Left or right door hinge (at time of order)

### ELECTRICAL SYSTEM

- 20 AMP breaker required for single door units
- Strip type 750-watt heating elements, operating on 208-240/60/1, having a total of 1500 watts per compartment
- Externally mounted blower system maintains even temperature through out the food zone area



Please verify qualifying units by visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

3779 Champion Blvd., Winston-Salem, NC 27105  
1-888-845-9800 Fax: 1-336-245-6453  
Beverage-Air.com Sales@bevair.com



# BEVERAGE-AIR®


| MODEL                               | PH2-1S-PT         |
|-------------------------------------|-------------------|
| <b>EXTERNAL DIMENSIONAL DATA</b>    |                   |
| Width Overall                       | 52 1/8"           |
| Depth Overall with Handle           | 38 3/8"           |
| Height Overall                      | 84 1/8"           |
| Number of Doors                     | 4                 |
| Depth with Door Open 90°            | 84 1/16"          |
| Door Openings (in)                  | 21 1/2" x 54 5/8" |
| <b>INTERNAL DIMENSIONAL DATA</b>    |                   |
| NET Capacity (cubic ft.)            | 43.3              |
| Internal Width Overall (in)         | 48 1/8"           |
| Internal Depth Overall (in)         | 26"               |
| Internal Height Overall (in)        | 56 5/8"           |
| Number of Shelves                   | 6                 |
| <b>ELECTRICAL DATA</b>              |                   |
| Amps                                | 11.3/13.0         |
| Cabinet Voltage                     | 208-240/60/1      |
| Total Wattage (Heaters & Fan @240V) | 3000              |
| <b>SHIPPING DATA</b>                |                   |
| Gross Weight - Crated               | 509 lbs           |
| Height - Crated                     | 87"               |
| Width - Crated                      | 55"               |
| Depth - Crated                      | 39"               |

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).


## P Series Warming Cabinet Pass-Thru Model: PH2-1S-PT

### Model Views


Required Clearance: Top 12"



### PLAN VIEW

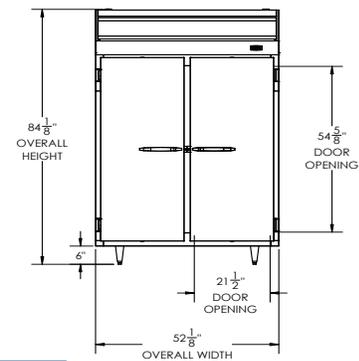

### ELEVATION VIEW

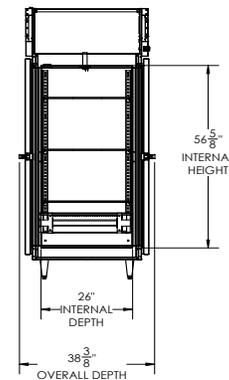

### SIDE VIEW



### ELECTRICAL CONNECTION



208-240/60/1  
NEMA 6-20P

Unit pre-wired at factory and include 8' long cord and plug set.