



Stainless steel cabinet construction

Stainless steel interior and exterior (galvanized steel back & bottom).



Temperature range between 33°F ~ 39°F

Air guard on rear wall ensures proper air circulation and cooling.



Hydrocarbon refrigerants (R-290)

Increases energy HFC refrigerants. It is safer for the environment and does not cause ozone depletion.





Exterior Dimensions (inches/mm)

L D H 93 1/4" 32 3/4" 37" 2370 mm 831 mm 939 mm

Weight (lbs/kg)

Net Weight Ship Weight 496 lbs 536 lbs 224 kg 243 kg

* Depth does not include 3 3/4" for cutting board * Height does not include 5" (127 mm) for casters








Cabinet construction

- High density foamed in place polyurethane insulation Environmentally safe.
- Drop-in section: Fans force cold air into this enclosed area keeping stred food items consistently cold
- Insulated pan cover with a stainless steel divider which prevents food spillage into the storage area beneath
- Unit accommodates standard 4" or 6" deep pans (pans are not included)
- Epoxy coated wire shelves with adjustable shelving height.
- Side rail cutting board bracket with 19" deep, 1/2" thick cutting board included
- Four (4) 4" diameter swivel casters with front brakes standard.

Refrigeration

- Front breathing, side mounted compressor unit.
- Compressor configuration allows unit to be efficient in narrow spaces and be serviced without being moved.
 - Epoxy coated evaporator reduces potential corrosion
- Refrigerators have a temperature range between 33°F ~ 39°F

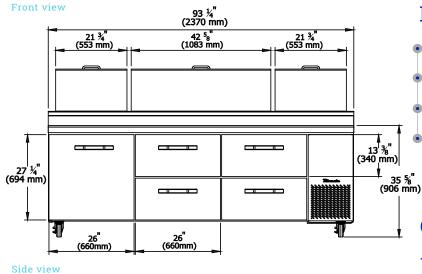


Doors


- Self-closing doors
- Durable door gasket with easy replacement.
- Lifetime guaranteed heavy duty all metal door handles. (Ni-Cr Plated)
- Door designed to open easily.

Optional Features & Accessories

- 2.5" diameter casters available
- b 6" adjustable legs available.
- Additional shelves are available.

Door

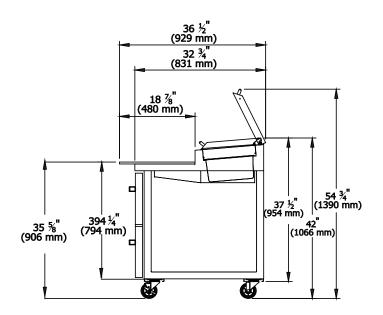

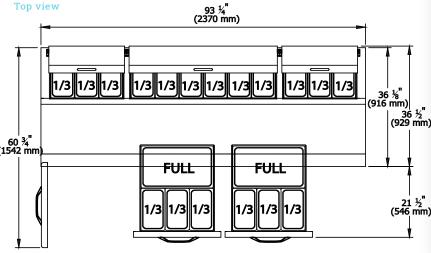

36 ½" (929 mm) 60 ¾" (1542 mm

Drawer 4 Capacity 30.8 Cu.Ft. **Shelves** 2 Refrigerant R-290 **Temperature** 33°F ~ 39°F Range Easy Sliding Maintenance Condensing Unit 9.8 ft long (3m) flexible three Connection wire cord with modeled plug HP 3/8 115V/60Hz Voltage **Amps** 3.5 **NEMA Config** NEMA 5-15



Blue Air has right to change specifications without further notice.



This product may exprose you to chemicals including Diisononyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to www.P65War nings.ca.gov.

Ce produit peut vous exposer á des agents chimiques incluant le Diisononyl Phthalate(DINP), reconnu par l'Esat de Californie comme causant le cancer, Pour de plus amples renseignements, consulter le site www.P65Warnings.ca.gov.





orders@blueairfse.com



9 W. Shelton Terrace #A, Hillside, NJ 07205 T: 470-625-0182