

MODEL: IMD-EVV49R2G
Wine cellars Serie Vintage.


General Strengths

- ✓ **Wine cooler Retro models**, manufactured for exhibiting, maintaining and preserving wine with a similar design like refrigeration equipment manufactured in the 1960's and built with the current production technologies.
- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning, the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** All doors include triple chamber door gaskets, easy to remove and snap in.
- ✓ **Control systems.** Higher precision in managing temperature settings. The ability to adjust of temperature ranges to meet end user's requirements.
- ✓ **100% Tested.** All condenser units are 100% tested in helium chambers in order to detect refrigeration leaks.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Considerably increases product visibility.

MODEL	Dimensions (inches) (mm)			Nº Doors	Nº Shelves	Nº Bottles	Ref.	Ref. Weight (lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H										
IMD-EVV49R2G	54-1/2 1385	23-5/8 601	80 2032	2	10	90+90	R134a	0.86 390	34°F / 64°F +4°C / +18°C	22.60 640	3/8	6.65	580 263

FTL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODEL: IMD-EVV49R2G

Wine cellars Serie Vintage.

STANDARD FEATURES

Exterior

- 100% Pine wood exterior (Top, Front, Sides).

Interior

- AISI 430 18/10 Stainless Steel,
- Sealed interior floors and rounded cabinet corners,
- LED Interior lighting.

Doors

- Wooden doors with double glass (6-10-4),
- Easy removal triple chamber gaskets,
- Full-height door opening: 19-1/4"x53" (489x1346mm).

Insulation

- Free CFC's high density (40kg/m3) polyurethane with low GWP & Zero ODP Effect

Shelving

- (7) wooden shelves, adjustable height and easy removal,
- Dimensions WxD: 18-3/4"x16-1/2" (477x420 mm).

Refrigeration

- Digital temperature controller with automatic defrost system,
- Energy -saving non- electric condensate pan,
- Evaporator coil coated with anti-corrosion material 100% Polyester,
- Forced air refrigeration system,
- Control of the final defrost temperature,
- Refrigeration capacity: 1583 Btu/h (14[°]F) / 464 W (-10[°]C).

Electrical

- Cord and NEMA 5-15P plug,
- Electrical connection is 115V / 1ph / 60 Hz.
- 15 AMP breakers required,




OPTIONAL FEATURES

- ✓ Decoration: cherry (standard), black and white (optional)
- ✓ Electrical connection is 230 V / 1ph / 50 Hz (plug type varies).

- **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

PLAN VIEW

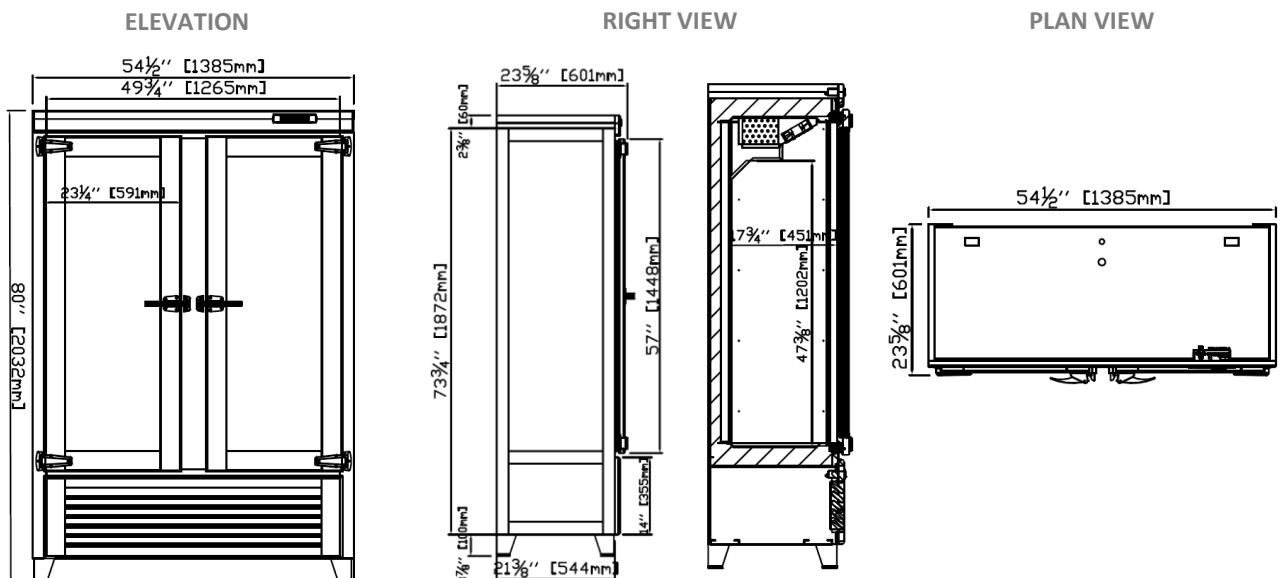

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE