

INSULATED UNDERCOUNTER HOT CABINET MODEL H-339-SBS-1210C

FEATURES AND BENEFITS:

- Extreme undercounter hot cabinet, only 27" tall, is perfect for children's serving lines, special installations and as an alternate to drawer warmers.
- Fully insulated cabinet keeps prepared foods at serving temperatures.
- Powerful, yet efficient, 900 Watt heating system maintains the right temperature to properly hold products. Heats up to 200°F (93°C).
- Internal frame in body and door maintains structural rigidity.
- Body constructed of non-corrosive, Hi-Tensile aluminum for strength. One piece extended base protects cabinet body.
- Safety-conscious anti-microbial latch protects against spreading germs.
- Insulated field reversible door for flexibility. Standard with right hand hinging; left hand hinging available upon request.
- Magnetic latch for "easy open"; twist-lock catch secures door. Latch and hinges mounted inboard.
- One piece welded rack insert easily removed for cleaning. Hold (10) 12" x 20" x 2-1/2" pans.
- Heavy duty 2-1/2" swivel casters, two with brakes. Provides mobility when fully loaded.



H-339-SBS-1210C



NSF/ANSI 4




c us

ACCESSORIES and OPTIONS (Available at extra cost):

- Key Lock Handle
- Corner Bumpers
- Perimeter Bumper
- Digital Thermometer
- 240 Volt Service

See page B-20 for accessory details.

H-339-SBS-1210C

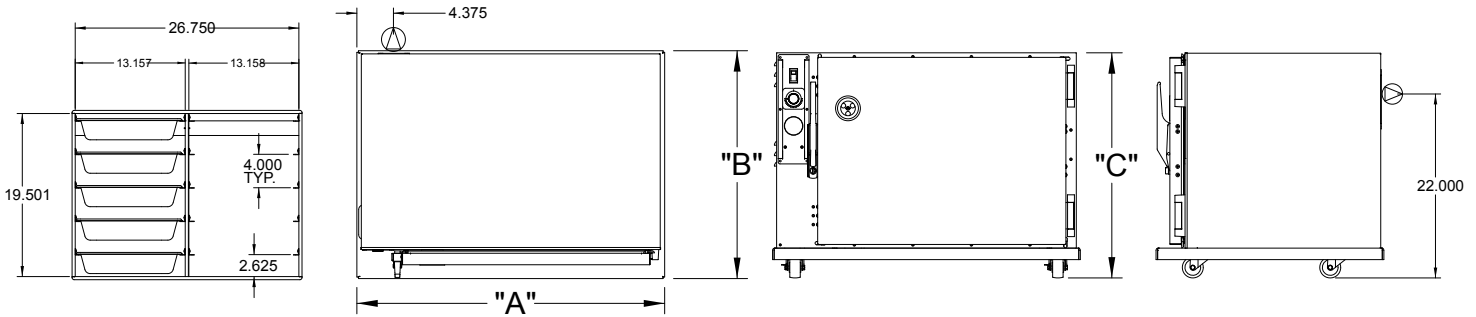

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAPACITY	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH*	DEPTH	HEIGHT		
H-339-SBS-1210C	10 PANS	12 X 20	IN	36-7/8	26-1/8	27	13-1/16	21-3/8	20-5/8	LBS	155
			MM	940	665	685	525	545	525	KG	70

*EACH COMPARTMENT

CABINET:

- Body: .063 aluminum.
- Reinforcement: Internal framework of channels, 1 x 3/4 x .125.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F. 1-1/2" in walls; 1" in door, top and bottom.

BASE:

- One piece construction, .190 aluminum.
- Casters: 2-1/2" dia., swivel, polyolefin tires, 1-1/8 wide, load cap. 200 lbs. each, temp. range -20°F/180°F. Plain bearings. Front casters equipped with brakes.

DOOR:

- Field reversible.
- Formed .063 aluminum.
- Latch: Chrome plated zinc with composite handle, magnetic type; mounted inboard.
- Hinges: Heavy duty chrome plated zinc; mounted inboard.
- Gasket: Perimeter type, silicone.
- Transport latch.
- Vent: Adjustable.

RACK INSERT:

- One piece welded 18 ga. stainless steel angles on 4" centers.

ELECTRICAL COMPARTMENT:

- Control panel: Formed .063 aluminum; black front.
- Thermostat: Solid state, room ambient to 200°F (93°C).
- Switch: Lighted ON-OFF rocker type.
- Power cord: 6 ft., 14/3 ga. with molded plug.
- Heaters (3): 300 Watts each.
- Thermometer.

POWER REQUIREMENTS:

- 900 Watts, 120 Volts, 60 Hz., single phase, 7.5 Amps., 15 Amp. service.

SHORT FORM SPECIFICATIONS

Cres Cor Insulated Under Counter Hot Cabinet Model H-339-SBS-1210C. Overall height of 27". Inner, outer and top liners of .063 aluminum, reinforced with channel frame. Field reversible, formed .063 aluminum door. Fiberglass insulation in walls 1-1/2"; door, top and bottom 1". Welded and finished .190 aluminum base. (3) 300 Watt inner wall heaters, 120 Volts. 2-1/2" swivel polyolefin casters, plain bearings. Load capacity 200 lbs. each. 2 year parts warranty. Provide the following accessories:
 _____ CSA-US, CSA-C, CSA to NSF4 listed.



5925 Heisley Road • Mentor, OH 44060-1833
 Phone: 877/CRESCOR • Fax: 440/350-7267
 www.crescor.com

© Crescent Metal Products, Inc. 2013 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.