

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

MARKETMAX DUAL-TEMP REFRIGERATOR/REFRIGERATOR

MMRR72HC White Hinged Triple Glass Door Hydrocarbon Series

MODEL: MMRR72HC-1-B-WW



7 Year Parts/Labor Warranty7 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior features durable white painted steel
- Heavy-duty interior construction includes white coated steel walls
- Brightly lit sign panel
- LED lighting
- Modern one-piece grille
- Full electronic control with digital display
- Dual-temp refrigerator/refrigerator units provide two different operating temperature zones for different types of products
- · Self-contained bottom mount refrigeration system
- Refrigerators have double pane lowE argon filled glass doors
- Self-closing doors with 120° stay-open feature
- Snap-in gaskets, easy to remove for cleaning or replacement
- Fifteen (15) heavy-duty epoxy coated wire shelves
- Four (4) shelf clips included per shelf
- Leveling feet standard

OPTIONS & ACCESSORIES

- · Stainless steel or black exterior
- Stainless steel or black interior
- Shelves black or white
- Shelf clips
- Flow track
- Gravity-Flo track
- Price tag molding
- 3" or 6" Casters
- 6" Legs or seismic/flanged legs
- Door locks (swing doors only)
- Custom signage & decals
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Non-electric defrost with hot gas condensate evaporation
- Epoxy coated evaporator coil
- Maintains product temperatures between 36°F to 38°F








MODEL	MMRR72HC-1-B-WW	
EXTERNAL DIMENSIONAL DATA		
Width Overall	75"	
Depth Overall (with handle)	33 ½"	
Height Overall	78 ½"	
Number of Doors	3	
Depth with Door Open 90°	55 ⅓ "	
Door Openings (in)	21 1/8" x 52 3/4"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (left/right section) (cubic ft.)	(R) 19.62 (R) 44.85	
Internal Width (left section) (in)	22"	
Internal Width (right section) (in)	47"	
Internal Depth Overall (in)	28 ½"	
Internal Height Usable (in)	55"	
Number of Shelves	15	
ELECTRICAL DATA		
Full Load Amperes (left section)	2.88	
Full Load Amperes (right section)	3.9	
REFRIGERATION DATA		
Horsepower	(R) 1/4 (R) 1/3	
Capacity (BTU/Hr) (left/right section)	(R) 1702 (R) 2291	
Heat Rejection (BTU/Hr)	5986	
Charge (lbs/grams/ounces) (left/right section)	(R) .1985 / 90 / 3.18 (R) .2425 / 110 / 3.88	
SHIPPING DATA		
Gross Weight (crated lbs)	950 lbs	
Height - Crated	85"	
Width - Crated	77"	
Depth - Crated	36"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Dual-Temp Glass Door Merchandisers Model: MMRR72HC-1-B-WW

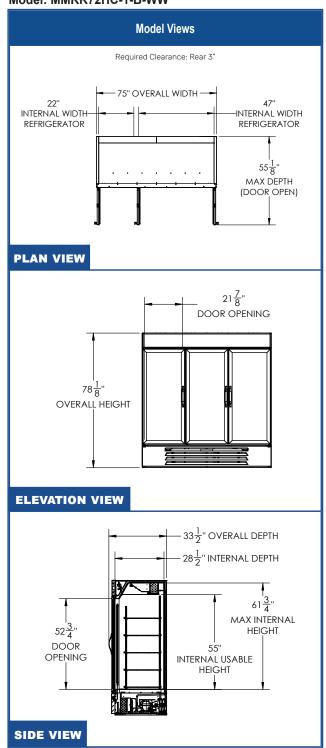



ELECTRICAL CONNECTION



115/60/1 (2) NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.



