



NSF-7 Refrigerated Cold Pans

- RCP-7100 RCP-7200 RCP-7300
- RCP-7400 RCP-7500 RCP-7600



STANDARD FEATURES

- 3" recessed top edge to comply with NSF-7 requirements
- Self contained, drop-in design
- Hold standard 12" by 20" food pans and fractional sized pans
- Stainless steel top and liner for maximum strength and durability
- 1" drains for ease of cleaning
- On-off switch with 8 ft cord & plug for ease of installation and operation
- Type R-513A CFC free refrigerant
- Fully insulated, CFC free, foamed-in place insulation keeps food cold while saving energy
- Recessed ledge for pan support and colder, fresher products
- Limited 1 year parts & labor warranty

DESCRIPTION

Wells Refrigerated Drop-In Cold Pans hold pre-chilled food products at cold, fresh and safe serving temperatures. All models are completely self-contained in one to six-pan models with individual thermostatic controls, are CFC free and include an 8 ft. 115V cord and plug. Pans are recessed 3" to comply with NSF-7 performance requirements.

SPECIFICATIONS

Exterior - One-piece top flange and coved-corner interiors constructed of 18 gauge stainless steel. Exterior body constructed of heavy gauge, corrosion resistant steel. Condensing unit mounted on corrosion resistant frame below the cold pan.

Interior - CFC free foamed-in-place insulation through-out, 1" drain located in the center for easy cleaning. Ledge is recessed 3" to comply with NSF-7 requirements, allowing a layer of air to insulate food and for pan support.

Refrigeration - Air cooled, type R-513A CFC free refrigerant system featuring wrapped coil construction on both sides and bottom, individual thermostats, on/off switch, 8 ft. cord and plug set NEMA 5-15P. Condensing unit may be easily removed for service.

OPTIONS & ACCESSORIES

- 5-year compressor warranty
- Perforated bottom strainer plate conveniently holds ice above drain to prevent clogging
- Adaptor bars for fractional sized pans
- Pan rails

CERTIFICATIONS



WELLS MANUFACTURING INTERNATIONAL INC.

265 Hobson Street • Smithville, Tennessee 37166
Telephone 800 264 7827 • www.wells-mfg.com


Printed in the U.S.A. • 2M-Z25171 REV C (12-24)
Specifications are subject to change without notice and are not intended for installation purposes.



Job _____ Item No. _____


NSF-7 Refrigerated Cold Pans

- RCP-7100 RCP-7200 RCP-7300
- RCP-7400 RCP-7500 RCP-7600




PLAN

COUNTER CUTOUT:
59" X 25 7/8"

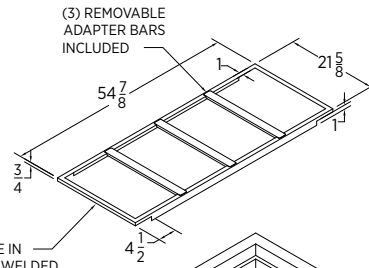


RCP-7400 shown


NOTE: RAILS ARE IN (4) PIECES, NOT WELDED

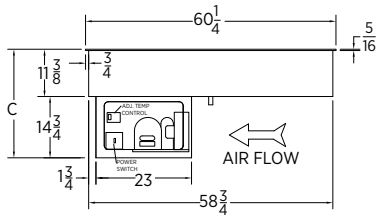

FRONT ELEVATION



SIDE ELEVATION



ISOMETRIC

NOTE:
Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.

SPECIFICATIONS SHIPPING INFORMATION

Model Number	OVERALL DIMENSIONS			INTERIOR DIMENSIONS		CUT OUT DIMENSIONS		Model Number	WEIGHTS		CARTON DIMENSIONS			CRATE SIZE	
	A Front to Back Inches (MM)	B Left to Right Inches (MM)	C Height Inches (MM)	D Front to Back Inches (MM)	E Left to Right Inches (MM)	F Front to Back Inches (MM)	G Left to Right Inches (MM)		SHIPPING WEIGHT POUNDS (KG)	INSTALLED WEIGHT POUNDS (KG)	WIDTH Inches (MM)	DEPTH Inches (MM)	HEIGHT Inches (MM)	CUBIC FEET	CUBIC METERS
RCP-7100	27-1/8 (689)	19-1/8 (486)	26-1/8 (664)	21-7/8 (556)	13-7/8 (352)	25-7/8 (657)	17-7/8 (454)	RCP-7100	115 (52)	105 (48)	21 (533)	29 (737)	32 (813)	11.3	0.31
RCP-7200	27-1/8 (689)	32-3/4 (832)	26-1/8 (664)	21-7/8 (556)	27-1/2 (699)	25-7/8 (657)	31-1/2 (800)	RCP-7200	140 (64)	124 (56)	29 (737)	34 (864)	32 (813)	18.3	0.52
RCP-7300	27-1/8 (689)	46-1/2 (1181)	26-1/8 (664)	21-7/8 (556)	41-1/4 (1048)	25-7/8 (657)	45-1/4 (1149)	RCP-7300	175 (79)	156 (71)	29 (737)	48 (1219)	32 (813)	25.8	0.73
RCP-7400	27-1/8 (689)	60-1/4 (1530)	26-1/8 (664)	21-7/8 (556)	55 (1397)	25-7/8 (657)	59 (1498)	RCP-7400	210 (95)	175 (79)	29 (737)	62 (1575)	32 (813)	33.3	0.94
RCP-7500	27-1/8 (689))	74 (1880)	26-1/8 (664)	21-7/8 (556)	68-3/4 (1746)	25-7/8 (657)	72-3/4 (1847)	RCP-7500	245 (111)	194 (88)	29 (737)	76 (1930)	32 (813)	41.0	1.16
RCP-7600	27-1/8 (689)	87-3/4 (2229)	26-1/8 (664)	21-7/8 (556)	82-1/2 (2096)	25-7/8 (657)	86-1/2 (2197)	RCP-7600	285 (129)	213 (97)	29 (737)	89 (2261)	32 (813)	47.8	1.35

POWER SUPPLY						
Model Number	VOLTS	HP	AMPS	PHASE	POWER SUPPLY	Refrigerant
RCP-7100	115	1/5	4	1	NEMA 5-15P	R-513A
RCP-7200	115	1/4	5	1	NEMA 5-15P	R-513A
RCP-7300	115	1/4	5	1	NEMA 5-15P	R-513A
RCP-7400	115	1/4	5	1	NEMA 5-15P	R-513A
RCP-7500	115	1/3	8	1	NEMA 5-15P	R-513A
RCP-7600	115	1/3	8	1	NEMA 5-15P	R-513A

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



WELLS MANUFACTURING INTERNATIONAL INC.

265 Hobson Street • Smithville, Tennessee 37166
Telephone 800 264 7827 • www.wells-mfg.com

Printed in the U.S.A. • 2M-Z25171 REV C (12-24)
Specifications are subject to change without notice and are not intended for installation purposes.