



Features

Eco-Friendly Refrigerant

R290 refrigerant with a global warming potential (GWP) of 3

High-Strength Door

Heavy-duty, stainless steel door is assembled using high-load brackets for long lasting durability

Easy to Clean

Stainless steel interior, coved corners, finished edges

Stainless Steel Exterior

Galvanized back and stainless steel bottom to reduce the risk of corrosion

High-Density Insulation

Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation

Cold Wall Refrigeration System

Optimized temperature control thanks to the cold wall refrigeration

Front Access Dispense Point


Includes a wide, front-access flapper door for easy access to fresh produce while maintaining an optimal holding environment

Cabinet Capacity

Internal area of 4.7ft³ with one product bin with removeable lid and front access door

Versatility

Standard countertop design includes optional wall mount accessory to free up counterspace

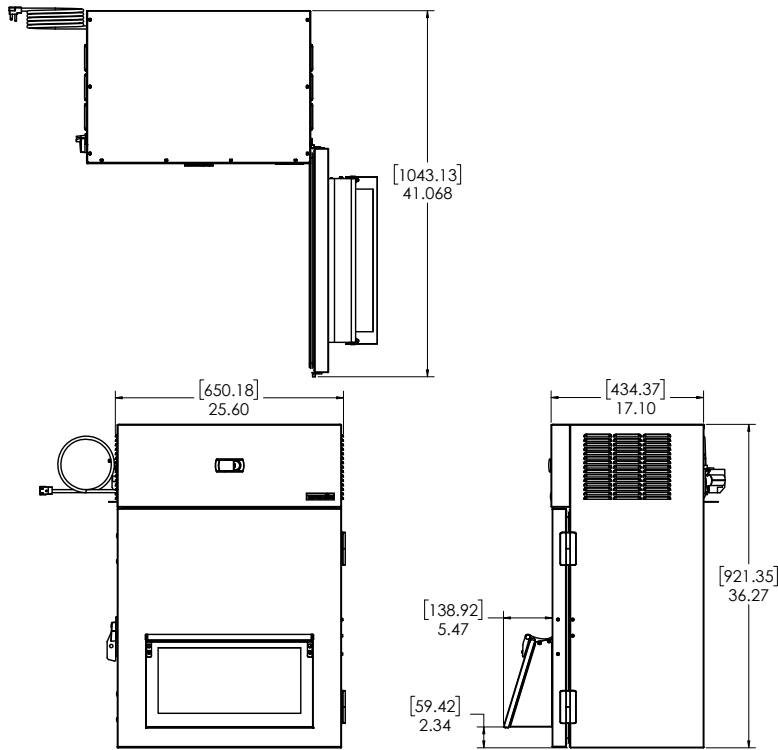

Technical Specifications

| | |
|----------------------------------|---|
| Electrical Requirements | 115v/60hz/1ph/3A/NEMA 5-15P Plug |
| Product Dimensions | 25.6"W x 36.27"H x 23.57"D (65.02cm x 92.13cm x 59.87cm) |
| Product Weight | 130lbs (58.97kg) |
| Shipping Dimensions | 31"W x 45"H x 32"D (78.74cm x 114.30cm x 81.28cm) |
| Shipping Weight | 145lbs (65.77kg) |
| Shipping Cubic Dimensions | 25.83ft ³ (0.73m ³) |
| Temperature Range | 36 to 40 (2.2 to 4.4°C) |
| Refrigerant | R290 |

| | |
|------------------------------|--|
| Insulation | Foamed-in-place, CFC-free polyurethane |
| Exterior Construction | Stainless steel exterior with galvanized back and bottom |
| Interior Construction | Stainless steel interior with covered corners and finished edges |
| Doors | One (1) right-hand swing door, reversible |
| Interior Capacity | 4.7 cubic feet |
| Certifications | ETL Safety, ETL Sanitation |
| Warranty | 1-year parts and labor, 5-year compressor (part only) |

| Model Number | Description |
|--------------|---|
| SKDL25-ESUS2 | Cold holding Refrigerator 25", 115v/60hz/1ph, single right-hand swing door, product bin, NEMA 5-15P |

To learn more about **Silver King Cold Holding Refrigerator**, visit silverking.com