




K-60 8-1/2" GOOSENECK SPLASH MOUNT FAUCET

Conforms To NSF 61/9 Lead Free Requirements



**FAUCET AERATOR CONFORM TO
ASTM.A112.18.1M • 1.0 GPM/3.8 LPM
THREAD: 55/64 - 27 FEMALE**

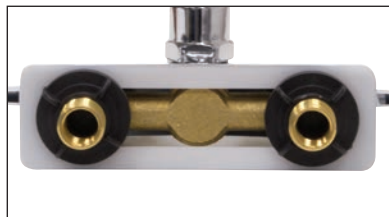

BOTTOM VIEW
1/2" NPS (OUTSIDE THREAD)
3/8" NPT (INSIDE THREAD)

Options & Accessories

Faucet Repair Kit K-07 (Set of 2)

Includes 2 Cartridges and 2 Handles
With Red & Blue Indexes



Low Flow Aerator

.5 GPM

K-08



WARNING:

Faucet(s) on this page may expose you to chemicals, including lead, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more Info., visit www.p65warnings.ca.gov.

Item #: _____ Qty #: _____

Model #: _____

Project #: _____


FEATURES:

- 8-1/2" swivel gooseneck spout.
- 4" O.C. water supply.
- Colored hot & cold Indexes.
- 1.0 GPM/3.8 LPM Aerator. 60 PSI.

MATERIAL:

- Brass chrome plated body & spout.
- Chrome plated handles.

DIMENSIONS and SPECIFICATIONS

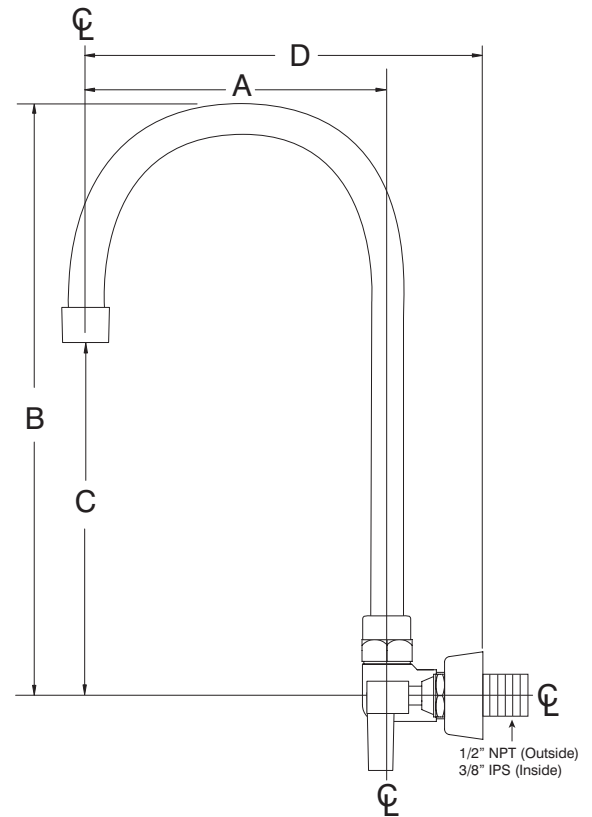

A Length	B Height	C	On Center Dimensions
8 1/2"	14 1/4"	8 1/4"	4" O.C.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933