



Model: **16-670-M-**\_\_ \_\_ Item #: \_\_\_\_\_ Date: \_\_\_\_\_  
 Project: \_\_\_\_\_ Qty: \_\_\_\_\_ Approved By: \_\_\_\_\_

**Electronic Sensor Faucet 4" Center Wall Mount with 4-1/2" Double Bend Spout**

**Royal Series**



**DESCRIPTION**

- Battery Powered Electronic Sensor Faucet with Control Module, Mechanical Mixing Valve, Supply Hoses & Mounting Hardware, Brushed Nickel Finish, 4-1/2" Double Bend Spout

**STANDARD FEATURES**

- 4" Center Wall Mount
- Infrared Sensor Operated
- Battery Powered Control Module, (4) AA Batteries Included
- Built-In Filter to Prevent Debris from Entering Solenoid Valve
- Low Battery Indicator Light
- Battery Life 1-3 Years Based on Usage
- Warranty: 3 Years

**SPECIFICATIONS**

Water Inlet	3/8" Male NPS
Control Module Inlet (Mixing Valve)	1/2" Female NPS
Temp. Range	40°F - 180°F
Water Pressure	20-120 psi
Sensor Type	Infrared
Default Time Out	30 Seconds
Default Shut-Off Delay	1 Second
Default Auto Flush	Off
Sensor Range	3/4" - 8-1/4"
Battery Life	500,000 cycles
Material	Solid Brass
Finish	Brushed Nickel
Weight	7 lbs.

**OUTLETS**

Standard Aerator	Suffix
<input type="checkbox"/> 1.00 GPM Aerator	M1

**PRODUCT COMPLIANCE**

- ASME A112.18.1-2011/CSA B125.1-11
- NSF-61
- NSF/ANSI 372
- Meets ANSI A117.1 (ADA)
- CEC Listed
- Massachusetts Approved




**WARNING:** Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes. California Proposition 65 Warning



Model: **16-670-M-\_\_** Item #: \_\_\_\_\_ Date: \_\_\_\_\_  
 Project: \_\_\_\_\_ Qty: \_\_\_\_\_ Approved By: \_\_\_\_\_

**Electronic Sensor Faucet 4" Center Wall Mount with 4-1/2" Double Bend Spout**

**Royal Series**

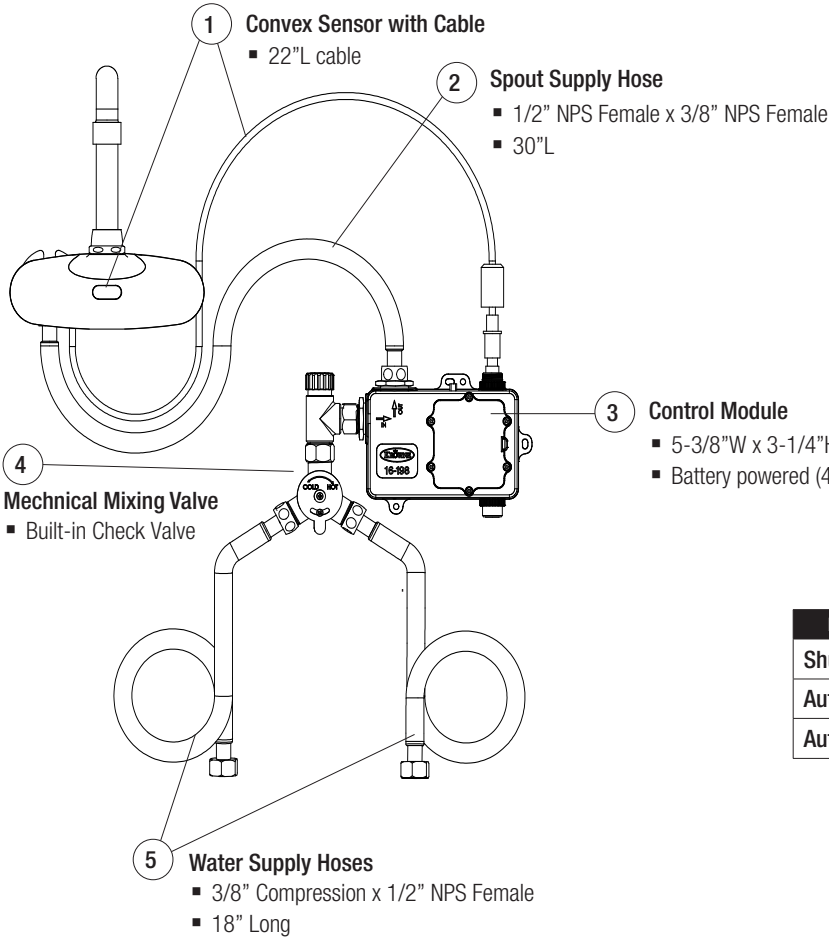

**Replacement Parts**

Model	Description
<b>1 16-505</b>	Flat Sensor with Cable
<b>2 16-512</b>	Spout Supply Hose
<b>3 16-198</b>	Control Module
<b>4 16-402L</b>	Mechanical Mixing Valve
<b>5 16-510</b>	Water Supply Hoses

Flow Control	Setting							
<b>Shut-Off Delay</b>	1s	10s	15s					
<b>Auto Flush</b>	ON				OFF			
<b>Auto Time Out</b>	15s	20s	25s	30s	45s	1m	2m	10m

Default Flow Control Setting Highlighted in Gray

