



Item No. _____

RC46-60HZ

RC46

Remote Condenser

Features


Provides remote refrigeration condensing for frozen dessert dispensing. Separate RC46's are required for each refrigeration system, i.e. on twin or double freezers with separate compressors for each freezing chamber, two (2) RC46's are required. Maximum total length of refrigeration line set is 50 feet (15.2 m).



750 N. Blackhawk Blvd. Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
info@taylor-company.com

ISO 9001:2008
Registered Firm



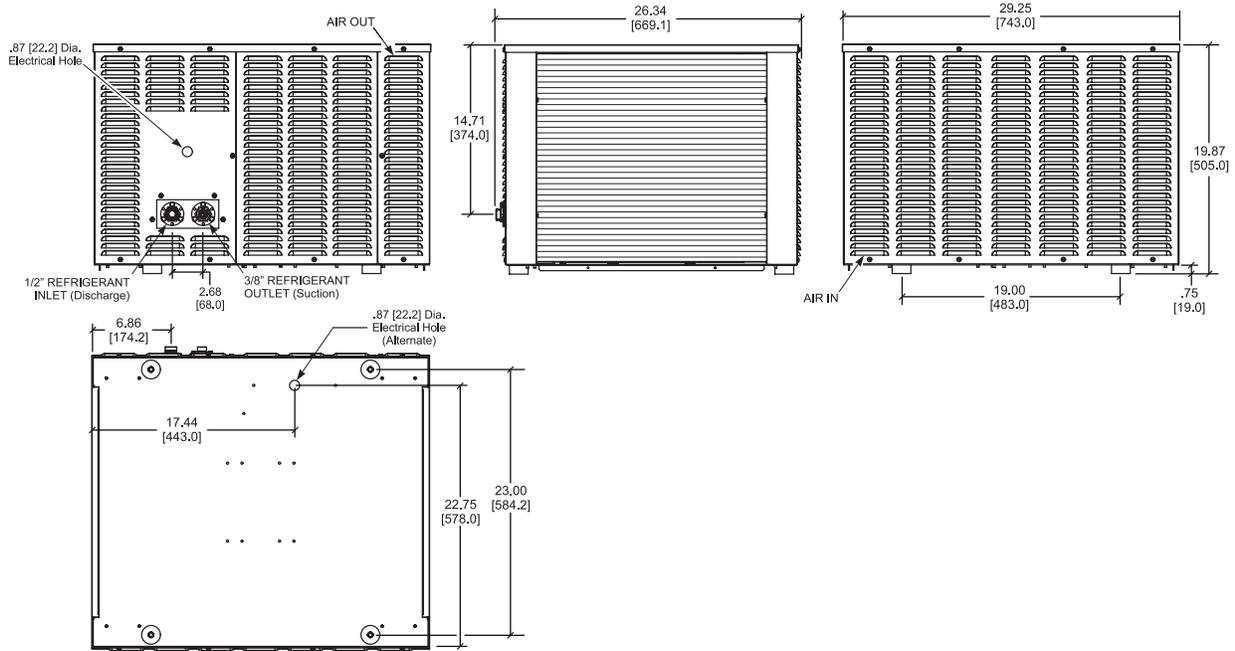

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS / EQUAL TO (PLUS OR MINUS 1/16 INCH [1.5mm]).

Weights	lbs.	kgs.	
Net	195.0	61.2	
Crated	205.0	78.4	
	cu. ft.	cu. m.	
Volume	12.7	.360	
Dimensions	in.	mm.	
Width	29-1/4	743	
Depth	26-3/8	670	
Height	19-7/8	505	
Floor Clearance	3/4	19	
Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)
208-230/60/1	15A	2A	2P 3W

Specifications

Electrical

Separate - 15 A / 208-230/60/1 connection required from the frozen desert dispenser to each RC46. Remote condenser power supplied by the frozen desert dispenser (15A).

Refrigeration Connections

3/8" O.D. on liquid (high pressure) side.
1/2" O.D. on discharge (high pressure) side.
(Refrigeration lines are not provided.)

Air Cooled

RC46: Each remote condenser requires a minimum air clearance of 18" (457 mm) on three sides.

An air deflector must be installed on each condenser side of the RC46 if mounted on the legs provided.

This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.

(For exact electrical information and approval marks, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
Neutral: Yes No Cooling: Air Water NA

Options: _____

Authorized Taylor Distributor