



K-316 3-1/2" GOOSENECK SPLASH MOUNT FAUCET WITH WRIST HANDLES

Conforms To NSF 61/9 Lead Free Requirements



FAUCET AERATOR CONFORM TO
ASTM.A112.18.1M • 1.0 GPM/3.8 LPM
THREAD: 55/64 - 27 FEMALE

Item #: _____ Qty #: _____
Model #: _____
Project #: _____




Click This Link To
View Assembly Sheet

FEATURES:

- 3-1/2" swivel gooseneck spout.
- 4" O.C. water supply.
- Quarter-turn 4" wrist style handle.
- Colored hot & cold Indexes.
- 1.0 GPM/3.8 LPM Aerator. 60 PSI.


MATERIAL:

- Brass chrome plated body & spout.
- Chrome plated wrist handles.

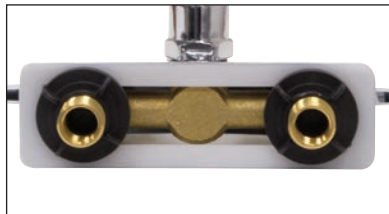

BOTTOM VIEW
1/2" NPS (OUTSIDE THREAD)
3/8" NPT (INSIDE THREAD)

DIMENSIONS and SPECIFICATIONS

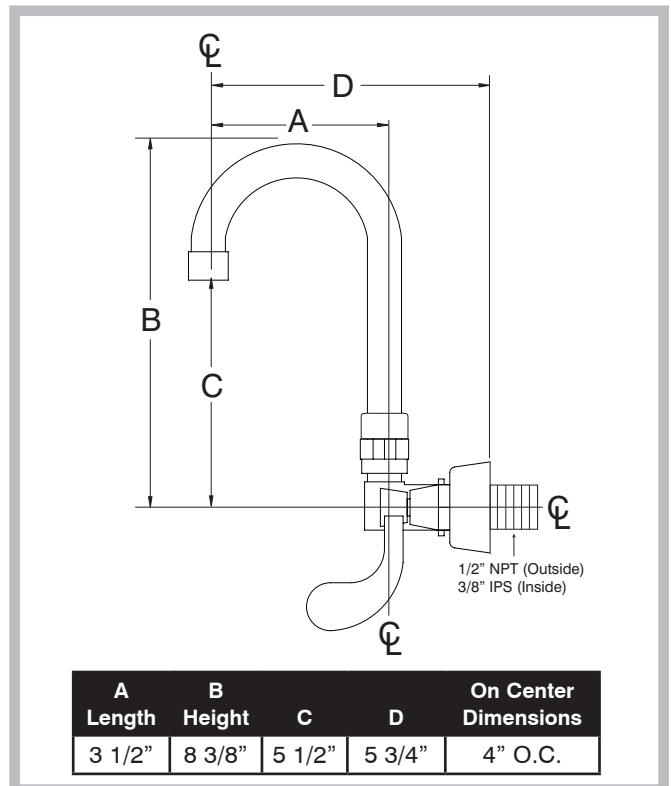

Options & Accessories

Replacement Spout For K-316 Faucet

3-1/2" Gooseneck Spout Only.

K-59SP



Low Flow Aerator

.5 GPM

K-08



Faucet Repair Kit*

K-00A (Set of 2)

Includes 2 Cartridges and 2 Handles With Red & Blue Indexes.

Please Note: Kit includes Wedge Style Handles. Replace handles with your existing Wrist Handles. New Wrist Handles (K-316-LU) can be ordered separately. See below.



Wrist Handles*

K-316-LU (Set of 2)



*Can Only Be Used On Faucets Purchased After January 2016. For Older Faucets, Consult Customer Service.

⚠ WARNING:

Faucet(s) on this page may expose you to chemicals, including lead, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more Info., visit www.p65warnings.ca.gov.



Customer Service Available To Assist You **1-800-645-3166** 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933