



Job: _____ Item No. _____
 Notes: _____
 Model Number: HL2-5 HL2-8 HL2-14
 HL2-18

hotLOGIX® Heated Holding Cabinets

SPECIFICATIONS



HL2-18

DESCRIPTION

hotLOGIX HL2 Series Heated Humidified Food Holding Cabinets are designed to hold cooked food, warm and ready for serving. They are constructed of lightweight, sturdy aluminum and feature a removable bottom-mounted heating module with recessed dial control. They come in under-counter, half height, 3/4 height and full height.

SHORT FORM SPECIFICATIONS

hotLOGIX holding cabinet with fixed wire slides for 12"x20"x2.5" or 18"x26" pans on adjustable, removable racks. Aluminum interior and exterior, single wall, non-insulated construction with blower heat and humidity module. Capable of heating to 190°F (88°C). 5" diameter rubber casters, all-swivel, two fitted with brakes. Single panel tempered glass door with magnetic latch. Single electrical connection: 120 volts, 2100 watts, 17.5 Amps, 60 Hz., single phase, 8 foot rubber cord with NEMA 5-20P grounding plug

WARRANTY

One year warranty for parts and labor.

FEATURES

- Recessed manual dial controls for easy temperature and humidity settings; digital thermometer
- Removable, bottom mounted blower heater with active humidity reservoir; manual fill
- Capable of heating to 190°F (88°C); pre-heat to 169°F (71°C) in approximately 30 minutes
- Single wall, non-insulated aluminum construction; .063 exterior with 2V finish; .125 natural aluminum base frame
- Single-pane, tempered glass door set in extruded aluminum frame with santoprene gasket; heavy-duty edge-mounted, chrome-plated latch with magnetic catch
- Adjustable edge-mount hinges with chrome plate finish
- 5" diameter casters with rubber tread, all-swivel, two fitted with brakes
- Adjustable, removable tray racks with universal wire slides; fixed spacing at 3"
- Accommodates 12"x20"x2.5" steam table pans, 18"x26" sheet pans, G/N 2/1 and G/N 1/2 pans
- Available in 4 sizes: under-counter, 1/2 height, 3/4 height and full height
- 120 volts, 2100 watts, 17.5 Amps, 60 Hz., single phase, 8 foot rubber cord with NEMA 5-20P grounding plug

OPTIONS AND ACCESSORIES

- Solid aluminum door with black anodized finish
- Stainless steel universal tray slides for 12"x20" and 18"x26" pans; 3" standard spacing; adjustable at 1.5" increments.
- Fixed angle slides for 18"x26" pans at 1.5" spacing
- Low wattage option*: 120V, 1500w, 13A, NEMA 5-15P
- CSA low wattage option*: 120v, 1400w, 13A, NEMA 5-15P
- Alternate electrical configurations (contact factory)
- Dutch door (HL2-18 only)

*Note: low wattage options will affect cabinet performance

CERTIFICATIONS



CARTER-HOFFMANN
 1551 McCormick Ave., Mundelein, IL 60060
 847.362.5500 800.323.9793
 www.carter-hoffmann.com

Follow Us



Form HL2-Series






Job: _____ Item No. _____
 Notes: _____
 Model Number: HL2-5 HL2-8 HL2-14
 HL2-18

hotLOGIX[®] Heated Holding Cabinets

SPECIFICATIONS

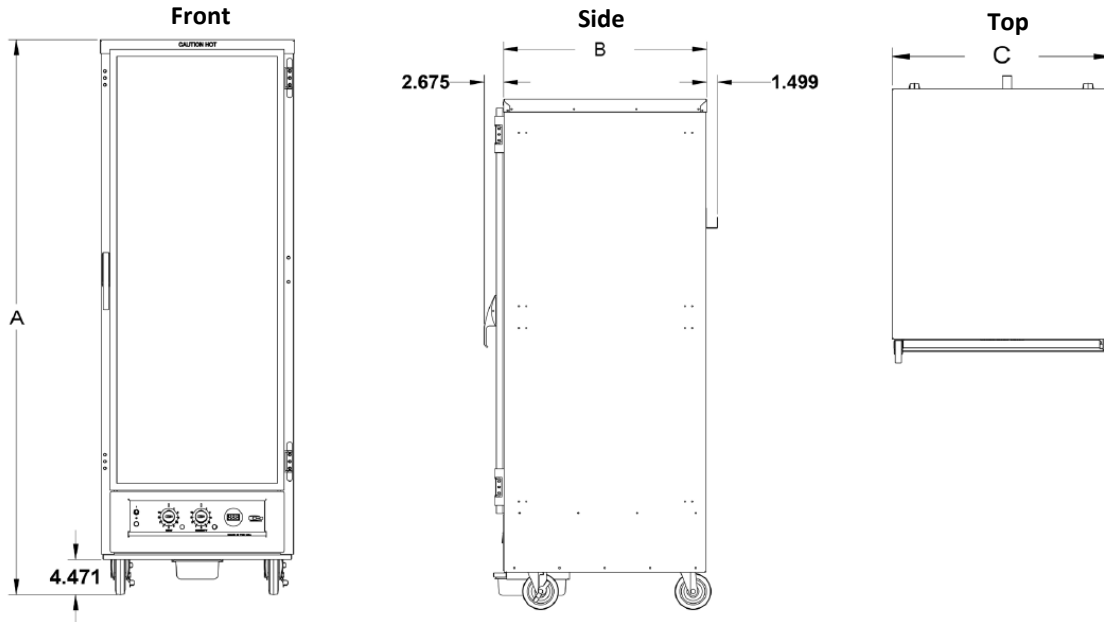


CLEARANCES

A clearance of at least 2" from any wall or combustible material. A clearance of at least 36" at the front of the cabinet is required to open the door.

ELECTRICAL DATA

Single electrical connection: 120 volts, 2100 watts, 17.5 A, 60Hz, single phase. Ten foot, three wire rubber cord with 3-prong grounding plug. NEMA 5-20P.



Model Number	Pan Capacity*		Inside Working Height		Height [A]		Depth [B]		Width [C]		Caster Diameter		Weight	
	12"x20"	18"x26"	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
HL2-5	10	5	15 ³ / ₈	389	31 ⁵ / ₈	803	29 ¹ / ₂	749	24 ³ / ₄	627	5	127	104	47
HL2-8	16	8	24 ³ / ₈	634	40 ⁵ / ₈	1032	29 ¹ / ₂	749	24 ³ / ₄	627	5	127	147	67
HL2-14	28	14	44	1118	58 ⁵ / ₈	1489	29 ¹ / ₂	749	24 ³ / ₄	627	5	127	170	77
HL2-18	36	18	54 ¹ / ₂	1384	70 ⁵ / ₈	1780	29 ¹ / ₂	749	24 ³ / ₄	627	5	127	218	99

*Pan spacing at 3" (76mm)

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Carter-Hoffmann exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.

CARTER-HOFFMANN

1551 McCormick Ave., Mundelein, IL 60060
 Phone 800.323.9793 • Fax 847.367.8981
 www.carter-hoffmann.com

Printed in the USA • HL2 Series • Rev. B • 10.23
 Specifications are subject to change without notice and are not intended for installation purposes.