



Painted Galvanized Steel Exterior

Minimize dents, scratches and rust





Temperature range between -10°F ~ 0°F

Air guard on rear wall ensures proper air circulation and cooling.



Hydrocarbon refrigerants (R-290)

increases energy efficiency by up to 25% compared to using HFC refrigerants. It is safer for the environment and does not cause ozone depletion





Exterior Dimensions (inches/mm)

L D H
79 3/8" 30" 33"
2017mm 761.5mm 839mm

Weight (lbs/kg)

Net Weight 256 lbs 116 kg Ship Weight 311 lbs 141 kg

Cabinet construction

- Epoxy coated wire baskets to minimize peeling and rust
- Polyurethane insulation CFC free, high density insulation foam which is eco friendly and energy efficient
- Bottom drain with plug for easy cleaning
- Sliding door lock with keys with additional security
- Four (4) standard casters


Refrigeration


 Bottom mount compressor system – The bottom mounted compressor provides quick and easy maintenance

Design & Features


- Digital Temperature control for reliable temperature operation
- Treated curved glass sliding door to enhance cooling
- Anti-fog tempered glass provides a clear view of the interior

Front view Side view

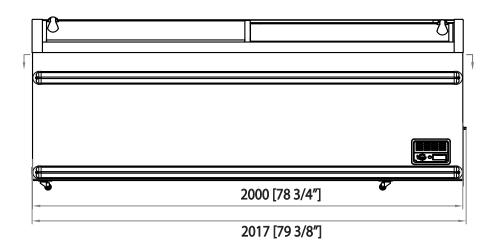



Top view

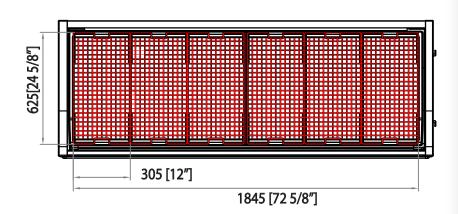

Basket 6 Capacity 24.72 Cu.Ft. Doors 2 Refrigerant R-290 -10°F ~ 0°F Sliding Easy Maintenance Condensing Unit 9.8 ft long (3m) flexible three Connection wire cord with modeled plug HP 3/4 Voltage 115V/60Hz 3.8 **Amps** NEMA Config. NEMA 5-20 Lighting Interior LED lighting



- This product may exprose you to chemicals including Diisononyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to www.P65War nings.ca.gov.

- Ce produit peut vous exposer à des agents chimiques incluant le Diisononyl Phthalate(DINP), reconnu par TEsat de Californie comme causant le cancer, Pour de plus amples renseignements, consulter le site www.P65Warnings.ca.gov.







