



TRAC 321 RPW

Automatic Tray Washer

- 528 Trays Per Hour | 15" Tray
- Optional Tray Dryer and Stacker Add-Ons
- Double Tank Configuration
- Made in the USA

STANDARD FEATURES

- Tank heat: 15 kW electric immersion heater or steam injector
- Capillary thermometers for wash and rinse
- In-line thermometer for final rinse
- Vacuum breaker on all incoming water lines
- Manifold clean-out brush
- Vents with adjustable damper controls
- Single point electrical connection: motor, controls and tank heat (Booster requires a separate connection)
- Inspection door
- Stainless steel frame, legs and feet
- Stainless steel front enclosure panel
- Automatic tank fill
- Low water protection
- Detergent connection provision
- Top mounted NEMA 12 control panel
- Simplified scrap screen design

- Door safety switch
- Standard frame drip proof motors
- Override switch for de-liming
- End caps/pipe plugs secured to prevent loss
- Tray unload table

OPTIONS

- Stainless steel steam coil tank heat
- Steam booster
- Electric booster
- Pressure reduction valve and line strainer
- Security package
- Insulated hood and door
- Chemical sanitizer injector package for low temperature operations (pump by others)
- Tray Dryer
- Tray Stacker

SPECIFIER STATEMENT

Specified unit will be an Insinger TRAC 321 RPW automatic double tank tray washer. Features include capillary thermometers for wash and rinse, inline thermometer for final rinse, vacuum breaker, vents with adjustable damper controls, inspection door, 304 stainless steel construction, automatic tank fill, low water protection, door safety switch, and a tray unload table.



SPECIFICATIONS



Capacity	Trays Per Hour	528
Heating & Venting	Wash Tank Heat	15 kW
	Booster Heat (40°F Rise)	27 kW
	Booster Heat (70°F Rise)	45 kW
	Venting (Load End)	100 CFM
	Venting (Unload End)	300 CFM
Water	Water Inlet Temperature	110°F
	Water Consumption (20 PSI)	248 gal/hr
	Pre-Wash Tank Capacity	10.3 gal
	Wash Tank Capacity	24.1 gal
	Peak Drain Flow	9 gal/min
Steam	Steam Tank Consumption (20 PSI)	54 lbs/hr
Other	Pre-Wash Motor HP	0.5
	Drive Motor HP	1/15
	Wash Motor HP	2
	Shipping Weight	800

ELECTRICAL

		Electric (TRAC)	27 kw Booster	45 kw Booster
Electrical Options	208/60/3	50.1 amps	75 amps	125 amps
	240/60/3	43.9 amps	65 amps	108.3 amps
	380/50/3	27.5 amps	Contact Factory	
	480/60/3	21.9 amps	32.5 amps	54.2 amps
Steam				
Electrical Options	208/60/3		8.5 amps	
	240/60/3		7.8 amps	
	380/50/3		4.7 amps	
	480/60/3		3.9 amps	

Contact Insinger Sales at 800-344-4802 for an installation drawing specific to your application.
 Note: Due to product improvement we reserve the right to change information and specifications without notice.

TECHNICAL DRAWINGS

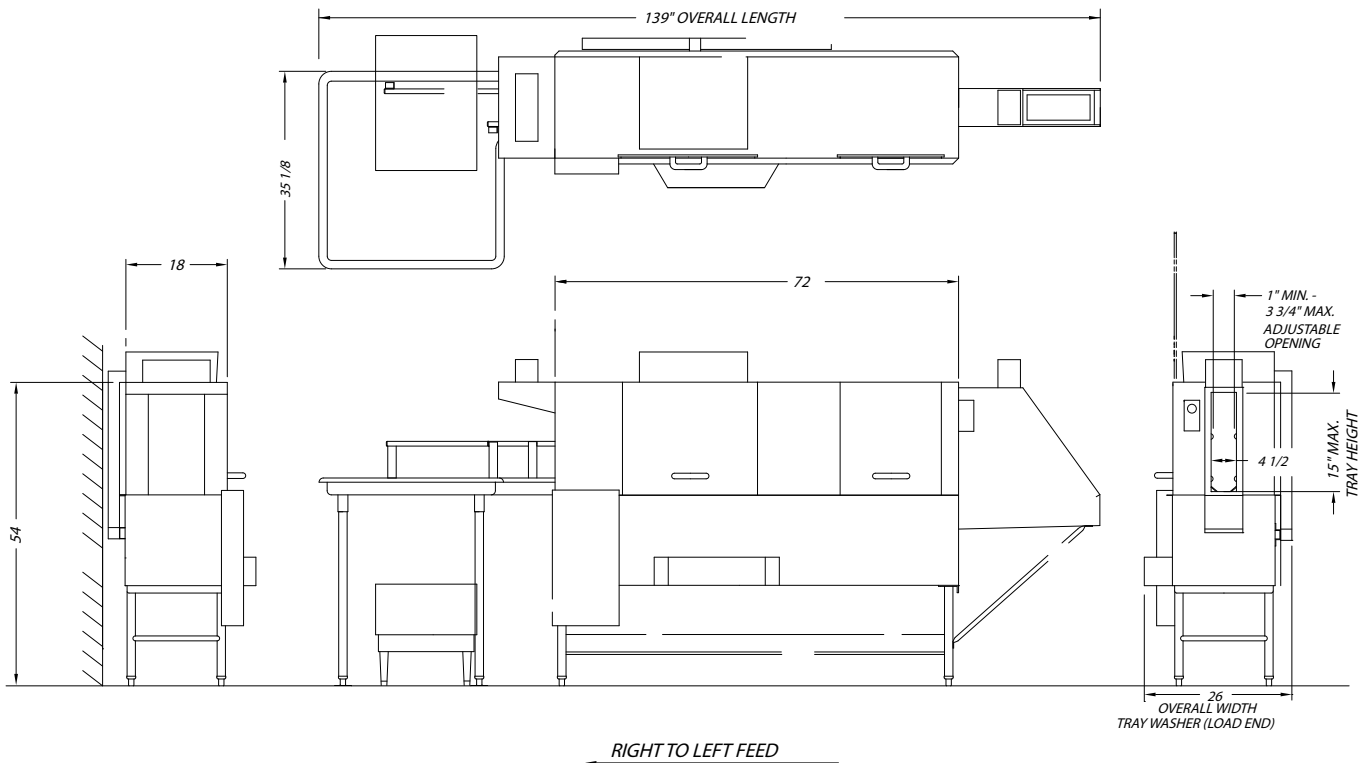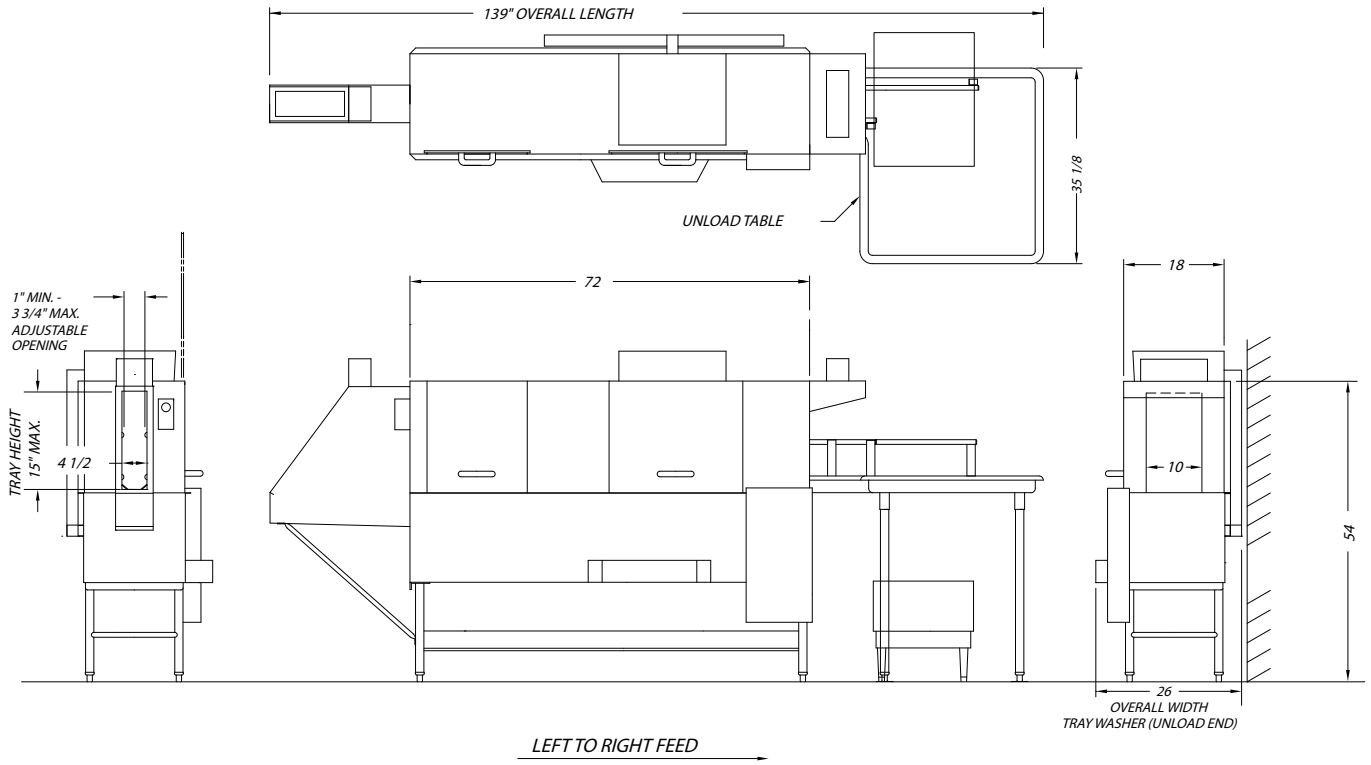

Contact Insinger Sales at 800-344-4802 for an installation drawing specific to your application.
 Note: Due to product improvement we reserve the right to change information and specifications without notice.