







## DA-3

### Automatic Pot & Pan Washer

-  50 Racks Per Hour | 24" x 28"
-  Rollers for Easy Rack Swapping
-  Rinse Pressure Regulator
-  Made in the USA

## STANDARD FEATURES

- Wash tank heat: electric or steam injection
- Pressure regulator
- Single point electrical connection
- Low water protection
- Door safety switches
- Two vent openings with adjustable damper
- Inspection door
- Vacuum breaker on all incoming water lines
- Capillary thermometer for wash and final rinse
- 304 stainless steel construction
- Stainless steel front panel
- Automatic fill
- Detergent connection provision
- Hold-down rack system
- Rollers for track
- Manual bypass selector switch
- Side-mounted control panel (NEMA 12)

- Simplified scrap screen design
- Interchangeable upper and lower spray arms
- Standard frame drip proof motor
- Rack assortment- 2 general utility, 2 bake sheets, 1 basket, 1 counter pan
- Manifold clean-out brush

## OPTIONS

- Stainless steel steam coil tank heat
- Steam booster
- Electric booster
- Security package
- Totally enclosed motor
- Pressure reduction valve and line strainer
- Door-activated drain closures
- Telescoping doors
- Drain cooldown

## SPECIFIER STATEMENT

Specified unit will be an Insinger DA-3 pot and pan washer. Features include pressure regulator, low water protection, door safety switches, inspection door, vacuum breaker on water lines, capillary thermometer, 304 stainless steel construction, automatic fill, and hold-down rack system.




## SPECIFICATIONS

Capacity	Racks Per Hour	50
	Sheet Pans Per Hour	276
Heating & Venting	Wash Tank Heat	5 kW
	Booster Heat (40°F Rise)	9 kW (x2)
	Booster Heat (70°F Rise)	24 kW (x2)
	Venting	600 CFM
Water	Water Inlet Temperature	110°F
	Water Consumption (20 PSI)	140 gal/hr
	Wash Tank Capacity	62 gal
	Peak Drain Flow	16 gal/min
Steam	Steam Tank Consumption (20 PSI)	20 lbs/hr
	Steam Consumption (20 PSI, 40°F Rise)	50 lbs/hr
	Steam Consumption (20 PSI, 70°F Rise)	88 lbs/hr
Other	Wash Motor HP	10
	Shipping Weight	1500

## ELECTRICAL

		Electric (DA-3)	9 kw Booster (x2)	24 kw Booster (x2)
Electrical Options	208/60/3	48.0 amps	76 amps	135.4 amps
	240/60/3	43.1 amps	66 amps	115.6 amps
	380/50/3	26.4 amps	Contact Factory	
	480/60/3	21.5 amps	32.6 amps	59.8 amps
<b>Steam</b>				
Electrical Options	208/60/3	34.1 amps		
	240/60/3	31.1 amps		
	380/50/3	18.8 amps		
	480/60/3	15.5 amps		

## TECHNICAL DRAWINGS

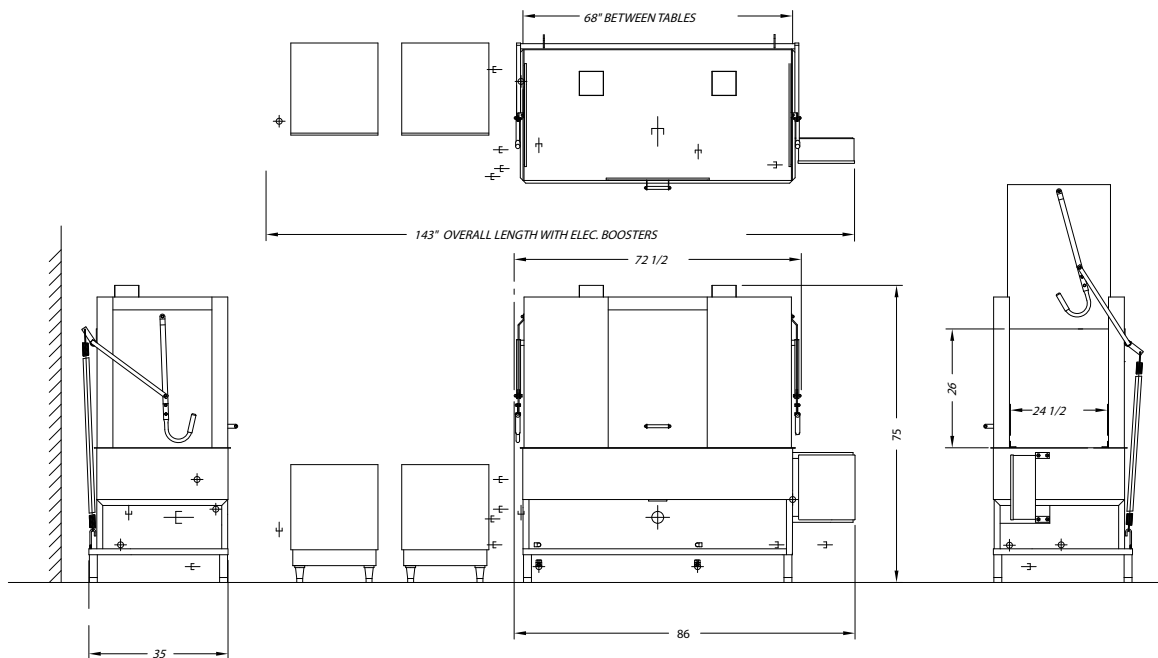

Contact Ininger Sales at 800-344-4802 for an installation drawing specific to your application.  
 Note: Due to product improvement we reserve the right to change information and specifications without notice.